

PROPRIETARY NOTE

THIS SPECIFICATION IS THE PROPERTY OF BOE HF AND SHALL NOT BE REPRODUCED OR COPIED WITHOUT THE WRITTEN PERMISSION OF BOE HF AND MUST BE RETURNED TO BOE HF UPON ITS REQUEST

BOE

| | | | | |
|----------------------|---------------------------|------------|------------------------|-----------------|
| SPEC. NUMBER S8-* | PRODUCT GROUP TFT- LCD | REV. P0 | ISSUE DATE 2018-4-8 | PAGE 1 OF 28 |
|----------------------|---------------------------|------------|------------------------|-----------------|

BA104S01-300 Product Specification Rev.P0

| | |
|----------|---|
| BUYER | |
| SUPPLIER | HEFEI BOE Optoelectronics Technology CO., LTD |
| FG-Code | BA104S01-300(ET104S0M-N10-3850) |

| ITEM | BUYER SIGNATURE | DATE | ITEM | SUPPLIER SIGNATURE | DATE |
|-------|-----------------|-------|----------|--------------------|-------|
| _____ | _____ | _____ | Prepared | _____ | _____ |
| _____ | _____ | _____ | Reviewed | _____ | _____ |
| _____ | _____ | _____ | Approved | _____ | _____ |

HEFEI BOE OPTOELECTRONICS TECHNOLOGY

R2015-6014-O

| PRODUCT GROUP | | REV | ISSUE DATE | BOE |
|-------------------------|--|------------------------|------------|-----------------|
| TFT- LCD PRODUCT | | P0 | 2018-4-8 | |
| SPEC. NUMBER S8-* | SPEC . TITLE BA104S01-300 Product Specification | | | PAGE 2 OF 28 |
| REVISION HISTORY | | | | |
| REV. | ECN No. | DESCRIPTION OF CHANGES | DATE | PREPARED |
| P0 | | Initial Release | 2018-4-8 | 王兵 |
| P1 | | | 2018-6-12 | 王兵 |
| | | | | |
| | | | | |
| | | | | |

R2015-6014-O

| | | | | |
|----------------------|---|-----|------------|-----------------|
| PRODUCT GROUP | | REV | ISSUE DATE | BOE |
| TFT- LCD PRODUCT | | P0 | 2018-4-8 | |
| SPEC. NUMBER S8-* | SPEC. TITLE BA104S01-300 Product Specification | | | PAGE 3 OF 28 |

Contents

| No. | Items | Page |
|-----|---------------------------|------|
| 1.0 | General Description | * |
| 2.0 | Absolute Maximum Ratings | |
| 3.0 | Electrical Specifications | |
| 4.0 | Optical Specifications | |
| 5.0 | Reliability Test | |
| 6.0 | Packing Information | |
| 7.0 | Product Label | |
| 8.0 | Handling & Cautions | |
| 9.0 | Appendix | |

R2015-6014-O


| | | | | |
|------------------|------------------------------------|-----|------------|------------|
| PRODUCT GROUP | | REV | ISSUE DATE | BOE |
| TFT- LCD PRODUCT | | P0 | 2018-4-8 | |
| SPEC. NUMBER | SPEC. TITLE | | PAGE | |
| S8-* | BA104S01-300 Product Specification | | 4 OF 28 | |

1.0 GENERAL DESCRIPTION

1.1 Introduction

BA104S01-300 is a color active matrix TFT LCD module using amorphous silicon TFT's (Thin Film Transistors) as an active switching devices. This module has a 10.4 inch diagonally measured active area with SVGA resolutions (800 horizontal by 600 vertical pixel array). Each pixel is divided into RED, GREEN, BLUE dots which are arranged in vertical stripe and this module can display 16.7M colors.

LVDS Signal

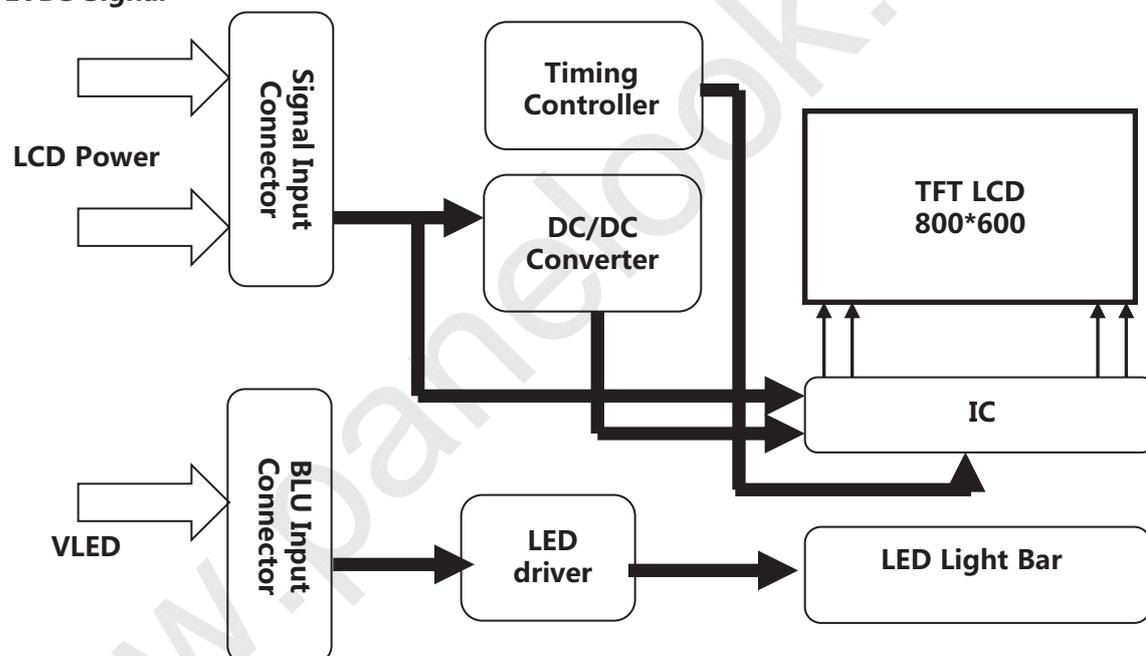

1.2 Features

- 0.5T Glass (Single) ;
- Module Design
- 6/ 8bits LVDS data input selection
- Thin and light weight
- High luminance and contrast ratio, low reflection and wide viewing angle
- RoHS compliant

R2015-6014-O

| PRODUCT GROUP | | REV | ISSUE DATE | BOE |
|---|--|--------|-----------------|------------|
| TFT- LCD PRODUCT | | P0 | 2018-4-8 | |
| SPEC. NUMBER S8-* | SPEC. TITLE BA104S01-300 Product Specification | | PAGE 5 OF 28 | |
| 1.3 Application <ul style="list-style-type: none"> ● Medical & Industrial application | | | | |
| 1.4 General Specification The followings are general specifications at the ** ***** | | | | |
| <Table 1. LCD Module Specifications> | | | | |
| Parameter | Specification | Unit | Remarks | |
| Active Area | 211.2(H)*158.4(V) | mm | | |
| Number Of Pixels | 800(H)×600(V) | pixels | | |
| Pixel Pitch | 0.264(H)×RGB×0.264(V) | mm | | |
| Pixel Arrangement | Pixels RGB stripe arrangement | | | |
| Display Mode | Normally White | | | |
| Display Colors | 16.2M(8bits) | colors | 6+2 | |
| Display Mode | Transmissive mode | | | |
| Surface Treatment | AG25 (CF) , Clear (TFT) | | | |
| Contrast Ratio | 800:1(typ.) | | | |
| Viewing Angle(CR>10) | 80/80/65/75(typ.) | deg. | | |
| Response Time | 30(typ.) | ms | | |
| Color Gamut | 55% | | | |
| Brightness | 300(min)/350(typ) | cd/m2 | | |
| Brightness Uniformity | 9 point: min 70% 9 point: typ 80% | | | |
| Power Consumption | LCD: 0.58(Max.)(Black Pattern) BLU: 1.98W(Max.) | watt | | |
| Outline Dimension | 236(H)*176.9(V)*5.6(typ)(LCM) | mm | | |
| Weight | 300(Max.) | gram | | |

R2015-6014-O

| | | | | |
|------------------|------------------------------------|-----|------------|------------|
| PRODUCT GROUP | | REV | ISSUE DATE | BOE |
| TFT- LCD PRODUCT | | P0 | 2018-4-8 | |
| SPEC. NUMBER | SPEC. TITLE | | | PAGE |
| S8-* | BA104S01-300 Product Specification | | | 6 OF 28 |


2.0 ABSOLUTE MAXIMUM RATINGS

The followings are maximum values which, if exceed, may cause faulty operation or damage to the unit. The operational and non-operational maximum voltage and current values are listed in Table 2.

< Table 3. Absolute Maximum Ratings >

| Parameter | | Symbol | Min. | Max. | Unit | Remarks |
|-----------------------|------------|-----------------|---------|------|------|------------|
| Power Supply | LCD Module | VDD | VSS-0.3 | 3.9 | V | Ta = 25 °C |
| | | VLED | VSS-0.3 | 43 | V | |
| | BLU | ILED | - | 25 | mA | |
| Operating Temperature | | T _{OP} | -20 | +70 | °C | Note 1 |
| Storage Temperature | | T _{ST} | -30 | +80 | °C | |

Note : 1) Temperature and relative humidity are shown in the figure below.
Wet bulb temperature should be 39 °C max. and no condensation of water.

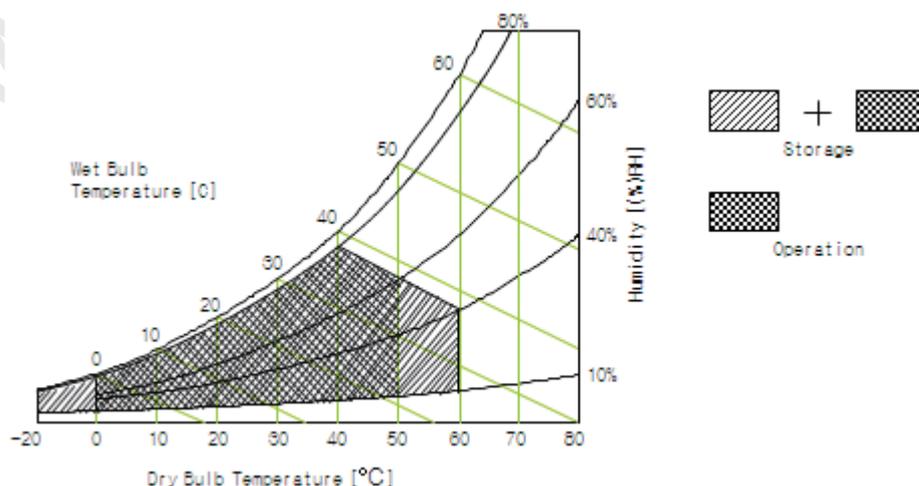

R2015-6014-O

| | | | | |
|----------------------|---|-----|------------|-----------------|
| PRODUCT GROUP | | REV | ISSUE DATE | BOE |
| TFT- LCD PRODUCT | | P0 | 2018-4-8 | |
| SPEC. NUMBER S8-* | SPEC. TITLE BA104S01-300 Product Specification | | | PAGE 7 OF 28 |


3.0 ELECTRICAL SPECIFICATIONS

3.1 TFT LCD Module

< Table 4. LCD Module Electrical specifications > [Ta=25±2 °C]

| Parameter | Symbol | Values | | | Unit | Notes |
|-----------------------|--------|--------|-------|------|------|-------|
| | | Min. | Typ. | Max. | | |
| Power Supply Voltage | VDD | 3.0 | 3.3 | 3.6 | V | |
| Power Supply Current | IDD | 120 | 150 | 180 | mA | |
| BLU Supply Voltage | VLED | 11.5 | 12 | 12.5 | V | |
| BLU Supply Current | ILED | - | 120 | - | mA | |
| Power Consumption | PLCD | 0.4 | 0.495 | 0.59 | W | |
| BLU Power Consumption | PBLU | - | - | 1.98 | W | |

- Notes : 1. The supply voltage is measured and specified at the interface connector of LCM.
The current draw and power consumption specified is for VBAT=3.8V, Frame rate $f_v=60\text{Hz}$ and Clock frequency = 156.8MHz. Test Pattern of power supply current
a) Typ : Mosaic 8 x 6 Pattern(L0/L255) b) Max : Black

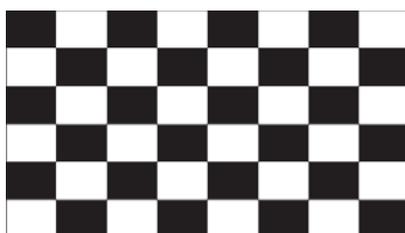

2. The duration of rush current is about 2ms and rising time of Power Input is 1ms(min)

R2015-6014-O

| | | | | |
|----------------------|---|-----|------------|-----------------|
| PRODUCT GROUP | | REV | ISSUE DATE | BOE |
| TFT- LCD PRODUCT | | P0 | 2018-4-8 | |
| SPEC. NUMBER S8-* | SPEC. TITLE BA104S01-300 Product Specification | | | PAGE 8 OF 28 |

3.2 Back-Light Unit

Table 5. LED Driver Electrical Specifications >

[Ta = 25 ± 2 °C]

| Parameter | Symbol | Values | | | Unit | Notes | |
|---------------------|------------|------------------|------|------|------|--------|--|
| | | Min. | Typ. | Max. | | | |
| LED Supply Voltage | VLED | - | 19.2 | 19.8 | V | | |
| | VRP | | | 300 | mV | Ripple | |
| LED Forward Current | ILED | - | 25 | - | mA | Note 1 | |
| Power Consumption | PLED | - | 1.92 | 1.98 | W | | |
| BLU on/off Level | BLU on | 3 | | 3.6 | V | | |
| | BLU off | 0 | | 0.5 | V | | |
| PWMIN | Level | High Level | 3 | | 3.6 | V | |
| | | Low Level | 0 | | 0.5 | V | |
| | Frequency | F _{PWM} | 200 | - | 20K | Hz | |
| | Duty Ratio | D _{PWM} | 1 | - | 100 | % | |
| LED Quantity | QLED | - | 24 | - | EA | | |
| LED Life Time | TLED | 30000 | - | - | Hrs | Note 2 | |

Notes: 1. ILED=4*25mA=100mA, 4Parallel*6String

PLED = VLED × ILED (Without LED converter transfer efficiency)

2. The life time of LED, 30,000Hrs, is determined as the time at which luminance of the LED is 50% compared to that of initial value at the typical LED current on condition of continuous operating at 25 ± 2°C.

R2015-6014-O

| | | | | |
|----------------------|---|-----|-----------------|------------|
| PRODUCT GROUP | | REV | ISSUE DATE | BOE |
| TFT- LCD PRODUCT | | P0 | 2018-4-8 | |
| SPEC. NUMBER S8-* | SPEC. TITLE BA104S01-300 Product Specification | | PAGE 9 OF 28 | |

3.4 INPUT TERMINAL PIN ASSIGNMENT

This LCD employs two interface connections, a 20 pin ZIF connector is used for the LCD module electronics interface and a 5 pin ZIF connector is used for the internal backlight system.

3.4.1 Pin assignment for LCD module

Connector : MSB24013P20 _HA(STM) or equivalent

< Table7. Pin Assignment for LCD Module Connector >

| Pin No. | Symbol | Description | I/O |
|---------|--------|-------------------------|-----|
| 1 | VCC | Power supply | P |
| 2 | VCC | Power supply | P |
| 3 | GND | Ground | - |
| 4 | SEL | VCC:8Bits; GND/NC:6Bits | I |
| 5 | RIN0- | LVDS signal input | I |
| 6 | RIN0+ | LVDS signal input | I |
| 7 | GND | Ground | - |
| 8 | RIN1- | LVDS signal input | I |
| 9 | RIN1+ | LVDS signal input | I |
| 10 | GND | Ground | - |
| 11 | RIN2- | LVDS signal input | I |
| 12 | RIN2+ | LVDS signal input | I |
| 13 | GND | Ground | - |
| 14 | CLKIN- | LVDS clock input | I |
| 15 | CLKIN+ | LVDS clock input | I |
| 16 | GND | Ground | - |
| 17 | RIN3- | LVDS signal input | I |
| 18 | RIN3+ | LVDS signal input | I |
| 19 | NC | No connection | I |
| 20 | NC/GND | Test function | - |

R2015-6014-O

| | | | | |
|----------------------|---|-----|------------|------------------|
| PRODUCT GROUP | | REV | ISSUE DATE | BOE |
| TFT- LCD PRODUCT | | P0 | 2018-4-8 | |
| SPEC. NUMBER S8-* | SPEC. TITLE BA104S01-300 Product Specification | | | PAGE 10 OF 28 |

3.4.2 Pin assignment for LED Bar

Connector : MSB24038P5 (STM) or equivalent

< Table8. Pin assignment for LED Bar >

| Pin No | Symbol | Description | Remarks |
|--------|--------|-------------------|---------|
| 1 | NC | No connection | |
| 2 | PWM | Luminance control | |
| 3 | EN | 3.3V-on / 0V-off | |
| 4 | GND | Ground | |
| 5 | VLED | Power supply | 12V |


R2015-6014-O

| | | | | |
|----------------------|---|-----|------------|------------------|
| PRODUCT GROUP | | REV | ISSUE DATE | BOE |
| TFT- LCD PRODUCT | | P0 | 2018-4-8 | |
| SPEC. NUMBER S8-* | SPEC. TITLE BA104S01-300 Product Specification | | | PAGE 11 OF 28 |

3.5.2 DC Specification

< Table11. DC Specification >


| Parameter | Symbol | Min | Typ | Max | Unit | Condition |
|-----------------------------------|----------|-----------|-----|-----------|------|---------------|
| Supply current | I_{DD} | - | 75 | - | mA | |
| LVDS DC specifications | | | | | | |
| Differential input high threshold | V_{TH} | - | - | +100 | mV | $V_{IC}=1.2V$ |
| Differential input low threshold | V_{TL} | -100 | - | - | mV | |
| LVDS common mode voltage | V_{IC} | 0.7 | - | 1.6 | V | |
| LVDS swing voltage | V_{ID} | ± 100 | - | ± 600 | mV | |

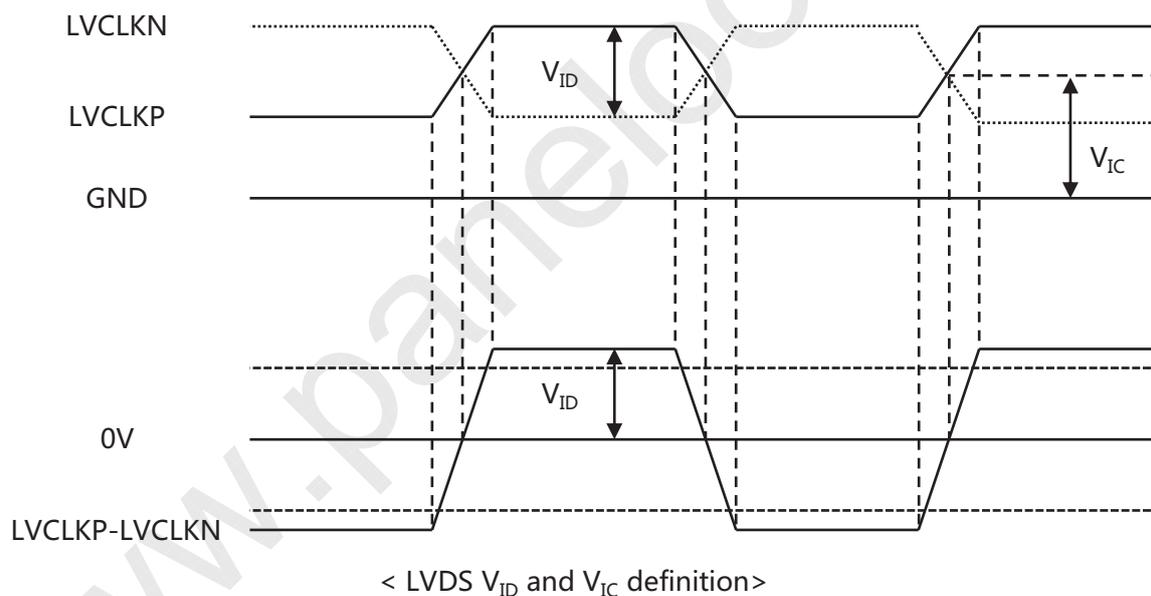

R2015-6014-O

| | | | | |
|----------------------|---|-----|------------|------------------|
| PRODUCT GROUP | | REV | ISSUE DATE | BOE |
| TFT- LCD PRODUCT | | P0 | 2018-4-8 | |
| SPEC. NUMBER S8-* | SPEC. TITLE BA104S01-300 Product Specification | | | PAGE 12 OF 28 |

3.5.3 AC Specification

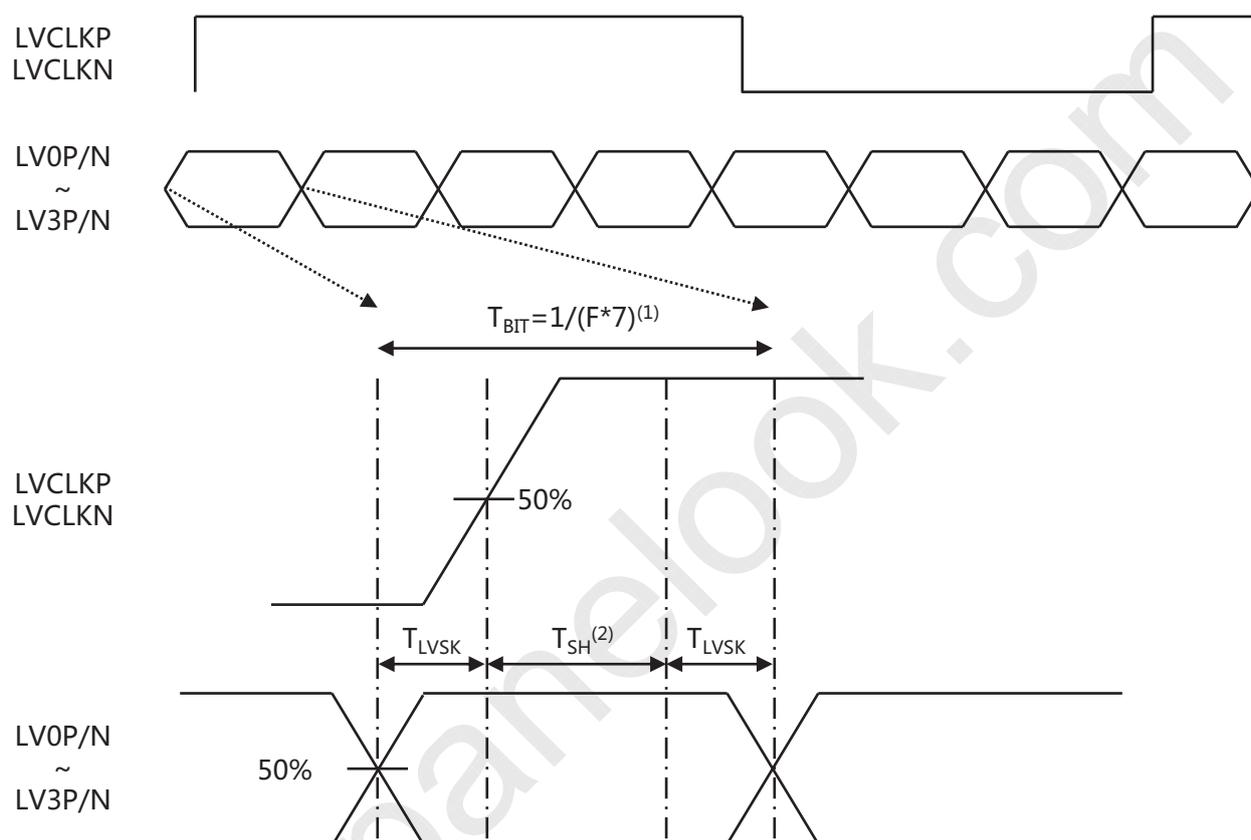

Note:

- (1) T_{BIT} : Data period
(2) Internal CLK sampling data window

< LVDS channel to channel skew >

< Table12. AC Specification >

| Description | Symbol | Condition | Min | Typ | Max | Unit |
|------------------------------|------------|--|------|-----|------|------|
| LVDS Input frequency | F | - | 20 | - | 85 | MHz |
| LVDS channel to channel skew | T_{LVSK} | F=65MHz $V_{IC}=1.2V$ $V_{ID}=\pm 200mV$ | -600 | - | +600 | ps |


R2015-6014-O

| | | | | |
|----------------------|---|-----|------------|------------------|
| PRODUCT GROUP | | REV | ISSUE DATE | BOE |
| TFT- LCD PRODUCT | | P0 | 2018-4-8 | |
| SPEC. NUMBER S8-* | SPEC. TITLE BA104S01-300 Product Specification | | | PAGE 13 OF 28 |

3.6 Interface timing Parameter

< Table13. Timing Parameter >

| Item | | Symbol | min | typ | max | UNIT | |
|--------|-------------|------------------------|-------|--------|--------|------|------------------|
| LCD | Frame Rate | - | - | 60 | - | Hz | |
| | Pixels Rate | - | 37.69 | 37.879 | 38.068 | MHz | |
| Timing | Horizontal | Horizontal total time | tHP | - | 1056 | - | t _{CLK} |
| | | Horizontal Active time | tHadr | 800 | | | t _{CLK} |
| | | Horizontal Back Porch | tHBP | | 88 | | t _{CLK} |
| | | Horizontal Front Porch | tHFP | | 40 | | t _{CLK} |
| | Vertical | Vertical total time | tvp | | 628 | | t _H |
| | | Vertical Active time | tVadr | 600 | | | t _H |
| | | Vertical Back Porch | tVBP | | 23 | | t _H |
| | | Vertical Front Porch | tVFP | | 1 | | t _H |
| Lane | | | - | 1 | - | Lane | |

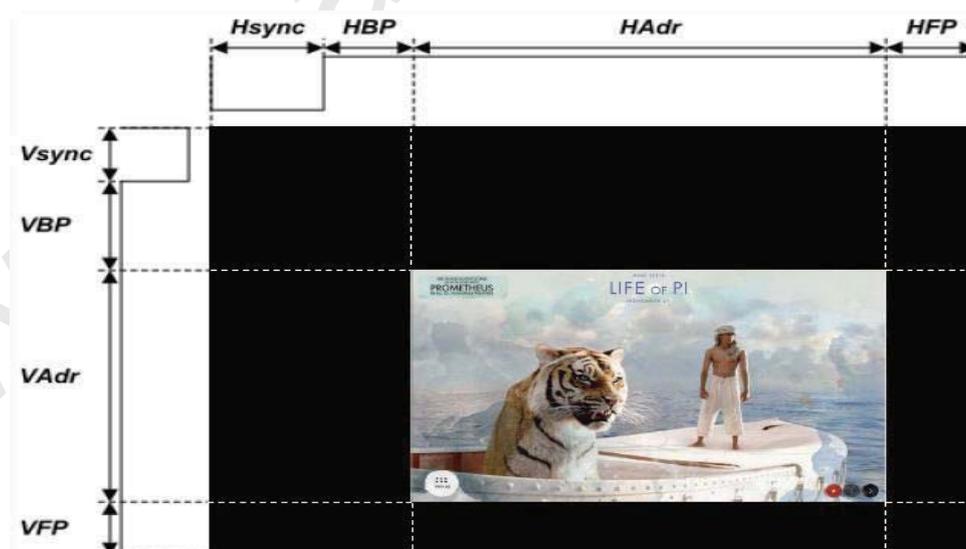


R2015-6014-O

| | | | | |
|----------------------|---|-----|------------|------------------|
| PRODUCT GROUP | | REV | ISSUE DATE | BOE |
| TFT- LCD PRODUCT | | P0 | 2018-4-8 | |
| SPEC. NUMBER S8-* | SPEC. TITLE BA104S01-300 Product Specification | | | PAGE 14 OF 28 |

3.7 Power Sequence

[Ta = 25±2 °C]

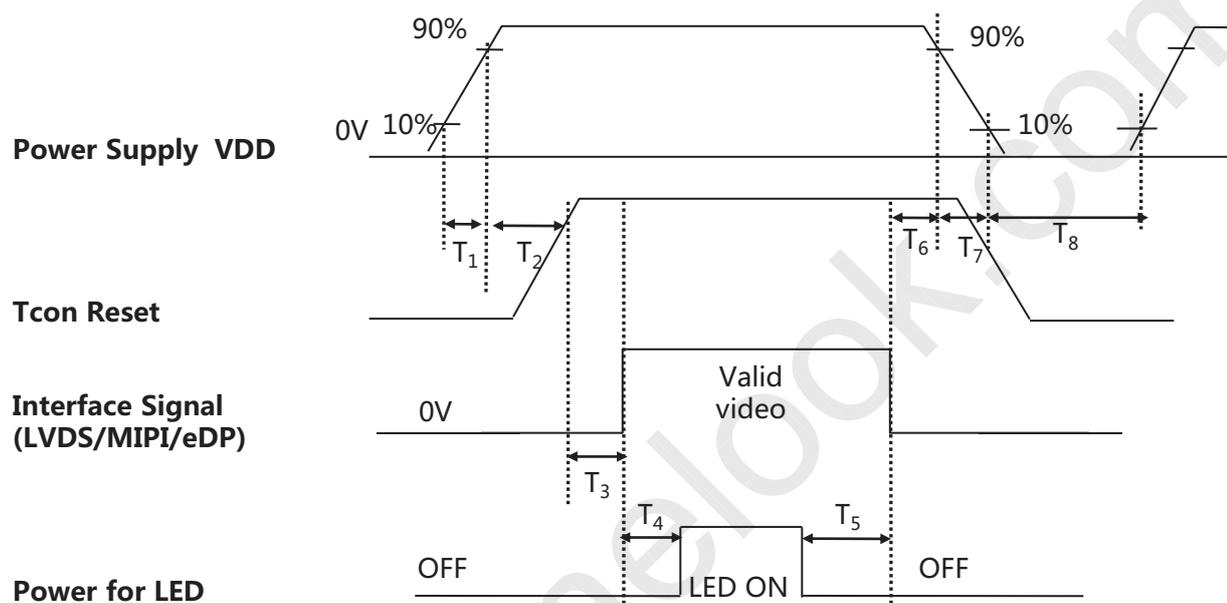

< Table15. Sequence Table >

| Parameter | Value | | | Units |
|-----------|-------|------|------|-------|
| | Min. | Typ. | Max. | |
| T1 | 0.1 | - | 5 | (ms) |
| T2 | 10 | - | 30 | (ms) |
| T3 | 5 | - | 100 | (ms) |
| T4 | 200 | - | - | (ms) |
| T5 | 200 | - | - | (ms) |
| T6 | 0 | - | 50 | (ms) |
| T7 | 0 | - | 10 | (ms) |
| T8 | 500 | - | - | (ms) |

R2015-6014-O

| | | | | |
|----------------------|---|-----|------------|------------------|
| PRODUCT GROUP | | REV | ISSUE DATE | BOE |
| TFT- LCD PRODUCT | | P0 | 2018-4-8 | |
| SPEC. NUMBER S8-* | SPEC. TITLE BA104S01-300 Product Specification | | | PAGE 15 OF 28 |

4.0 OPTICAL SPECIFICATIONS

4.1 Overview

The test of optical specifications shall be measured in a dark room (ambient luminance ≤ 1 lux and temperature = $25\pm 2^{\circ}\text{C}$) with the equipment of Luminance meter system (Gonio meter system and TOPCON BM-5) and test unit shall be located at an approximate distance 50cm from the LCD surface at a viewing angle of θ and Φ equal to 0° . We refer to $\theta=0$ ($=\theta_3$) as the 3 o' clock direction (the "right"), $\theta=90$ ($=\theta_{12}$) as the 12 O' clock direction ("upward"), $\theta=180$ ($=\theta_9$) as the 9 O' clock direction ("left") and $\theta=270$ ($=\theta_6$) as the 6 O' clock direction ("bottom"). While scanning θ and/or Φ , the center of the measuring spot on the Display surface shall stay fixed.


4.2 Optical Specifications < Table16. Optical Table >

| Item | Symbol | Condition | Min | Typ. | Max | Unit | Note |
|--|--------------|--------------------|-------|---------------|-------|-------------------|---------------|
| luminance | Bp | $\theta=0^{\circ}$ | 300 | 350 | -- | cd/m ² | <u>Note 1</u> |
| Brightness Uniformity | ΔB_p | | 70 | 80 | -- | % | <u>Note 2</u> |
| Viewing Angle | θ_L | Cr ≥ 10 | 70 | 80 | -- | deg | <u>Note 3</u> |
| | θ_R | | 70 | 80 | -- | | |
| | ψ_T | | 55 | 65 | -- | | |
| | ψ_B | | 65 | 75 | -- | | |
| Contrast Ratio | Cr | $\theta=0^{\circ}$ | 600 | 800 | | - | <u>Note 4</u> |
| Response Time | Tr+Tf | FF=0 $^{\circ}$ | - | 30 | 35 | ms | <u>Note 5</u> |
| Color Coordinate of CIE1931 | Rx | $\theta=0^{\circ}$ | 0.574 | 0.604 | 0.634 | - | <u>Note 6</u> |
| | Ry | | 0.296 | 0.326 | 0.356 | | |
| | Gx | | 0.279 | 0.309 | 0.339 | | |
| | Gy | | 0.548 | 0.578 | 0.608 | | |
| | Bx | | 0.119 | 0.149 | 0.179 | | |
| | By | | 0.070 | 0.100 | 0.130 | | |
| | Wx | | 0.254 | 0.284 | 0.314 | | |
| | Wy | | 0.290 | 0.320 | 0.350 | | |
| NTSC Ratio | NTSC | CIE1931 | 50 | 55 | -- | % | <u>Note 7</u> |
| Polarization Direction of Front Polarizer | PdF | | | 45 $^{\circ}$ | | deg | <u>Note 8</u> |
| Polarization Direction of Rear Polarizer | PdR | | | 45 $^{\circ}$ | | Deg | |
| Gray inversion angle | | | | 6点钟 | | | <u>Note 9</u> |

R2015-6014-O

| | | | | |
|----------------------|------------------------------------|-----|------------|------------|
| PRODUCT GROUP | | REV | ISSUE DATE | BOE |
| TFT- LCD PRODUCT | | P0 | 2018-4-8 | |
| SPEC. NUMBER | SPEC. TITLE | | PAGE | |
| S8-* | BA104S01-300 Product Specification | | 17 OF 28 | |

Note 3: The definition of Viewing Angle
Refer to the graph below marked by θ and ϕ .

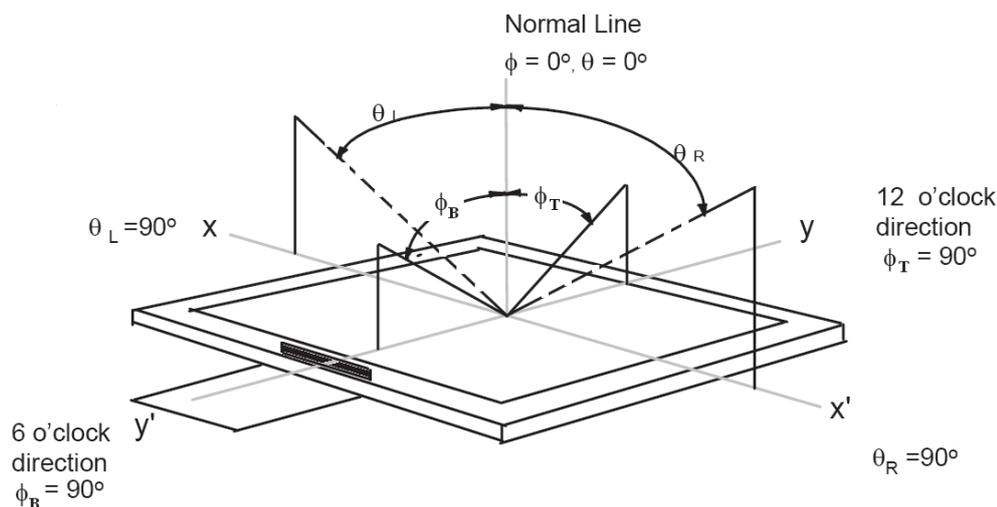


Note 4: The definition of Contrast Ratio (Test LCM using CS2000 or similar equipments):

$$\text{Contrast Ratio (CR)} = \frac{\text{Luminance When LCD is at "White" state}}{\text{Luminance When LCD is at "Black" state}}$$

(Contrast Ratio is measured in optimum common electrode voltage)

Note 5: Definition of Response time. (Test LCD using DMS501 or similar equipments):

The output sign also photo detector are measured when the input sign also are changed from "black" to "white" (Voltage falling time) and from "white" to "black" (Voltage rising time), respectively. The response time is defined as the time interval between the 10% and 90% of amplitudes. Refer to figures below.

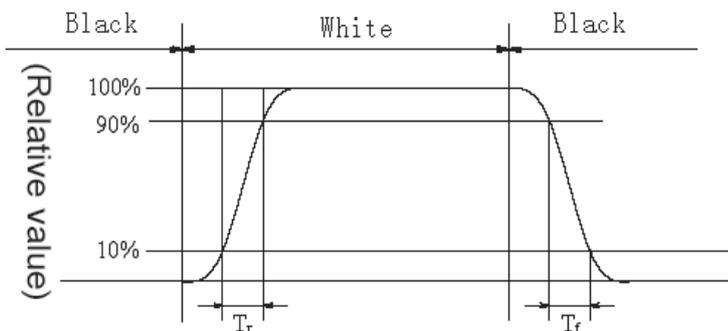

| | L0 | L1 | L2 | L3 | L4 | L5 | L6 | L7 |
|----|-------|-------|-------|-------|-------|-------|-------|-------|
| L0 | Black | White |
| L1 | White | Black | White | White | White | White | White | White |
| L2 | White | White | Black | White | White | White | White | White |
| L3 | White | White | White | Black | White | White | White | White |
| L4 | White | White | White | White | Black | White | White | White |
| L5 | White | White | White | White | White | Black | White | White |
| L6 | White | White | White | White | White | White | Black | White |
| L7 | White | Black |

Response time of gray to gray:

Measurement equipment: DMS501 or similar equipments.

Test method: we define 8 grays L0-L7, the grays of L0-L7 were defined as: 0, 36, 73, 109, 146, 182, 219, 255. The output signals of photodetector are measured when the input signals are rechanged from "Lx" to "Ly", x, y = [0, 7]. The response time is defined as the time interval between the 10% and 90% of amplitudes. The result of the test can be noted as below:

R2015-6014-O

| | | | | |
|------------------|------------------------------------|-----|------------|------------|
| PRODUCT GROUP | | REV | ISSUE DATE | BOE |
| TFT- LCD PRODUCT | | P0 | 2018-4-8 | |
| SPEC. NUMBER | SPEC. TITLE | | PAGE | |
| S8-* | BA104S01-300 Product Specification | | 18 OF 28 | |

Note 6: Color Coordinates of CIE 1931


The test condition is at ILED=100mA and measured on the surface of LCD module at 25°C.

Measurement equipment:CS2000 or similar equipments


The Color Coordinate (CIE 1931) is the measurement of the center of the display shown in below figure.

Note 7: Definition of Color of CIE Coordinate and NTSC Ratio.

$$S = \frac{\text{area of RGB triangle}}{\text{area of NTSC triangle}} \times 100\%$$

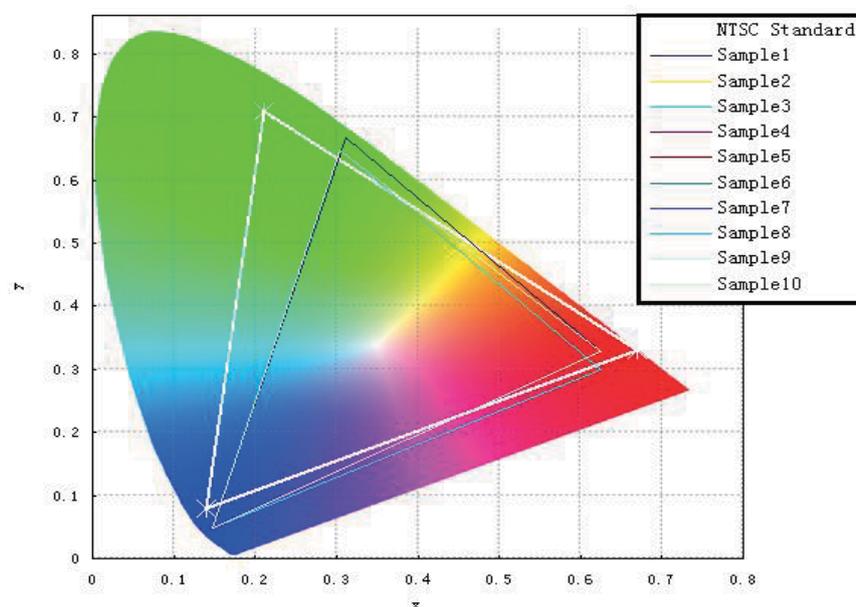**Note 8: Polarization Direction Definition**

- Viewing direction is normal user viewing direction which is vertical to the display surface
- The polarizer which is closer to viewer is defined as Front Polarizer
- The polarizer which is on the rear side of viewer is defined as Rear Polarizer
- The X axis is defined as parallel line to top & bottom sidelines of the Active Area
- PdF which is marked in blue arrow is polarization degree of Front polarizer
- PdR which is marked in red arrow is polarization degree of Back polarizer
- The polarization degree parameter must be indicated in range of 0deg to 180deg according to above definition

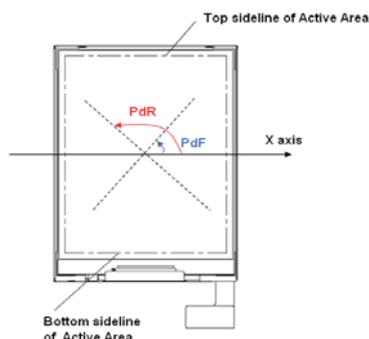


R2015-6014-O

| | | | | |
|------------------|------------------------------------|-----|------------|------------|
| PRODUCT GROUP | | REV | ISSUE DATE | BOE |
| TFT- LCD PRODUCT | | P0 | 2018-4-8 | |
| SPEC. NUMBER | SPEC. TITLE | | PAGE | |
| S8-* | BA104S01-300 Product Specification | | 19 OF 28 | |

Note 9: Definition of gray inversion angle

- Refer to the graph of note 9.
- Using luminance test method.
- Test pattern : 128 gray
- If the viewing direction is 12 o' clock ,then test the luminance while $\theta = -60^\circ, \theta = -50^\circ, \theta = -40^\circ, \theta = -30^\circ, \theta = -20^\circ, \theta = -10^\circ, \theta = 0^\circ, \theta = 10^\circ, \theta = 20^\circ, \theta = 30^\circ, \theta = 40^\circ, \theta = -50^\circ, \theta = 60^\circ$. The luminance test as figure below:

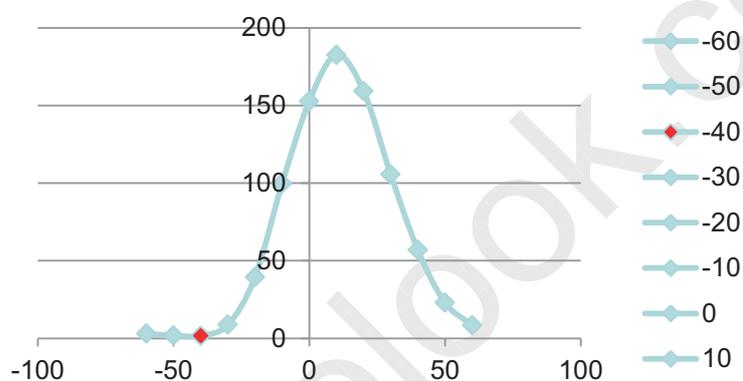

R2015-6014-O

| | | | | |
|----------------------|---|-----|------------|------------------|
| PRODUCT GROUP | | REV | ISSUE DATE | BOE |
| TFT- LCD PRODUCT | | P0 | 2018-4-8 | |
| SPEC. NUMBER S8-* | SPEC. TITLE BA104S01-300 Product Specification | | | PAGE 20 OF 28 |

5.0 RELIABILITY TEST

The Reliability test items and its conditions are shown in below.

<Table 17. Reliability Test Parameters >


| No | Test Items | Conditions |
|----|--|---|
| 1 | High temperature storage test | 80°C , 240hr |
| 2 | Low temperature storage test | -30°C , 240hr |
| 3 | High temperature & high humidity (operation test) | 60°C , 90%RH , 240hr |
| 4 | Low temperature operation test | -20°C , 240hr |
| 5 | High temperature operation test | 70°C , 240hr |
| 6 | Thermal Shock Test | -40°C~85°C , 1hr/cycle , 100cycle |
| 7 | ALT | -10°C~65°C , 0%~93% , 24hr/cycle , 10 cycle |
| 8 | PCT | 121°C , 100%RH , 2atm , 12hr |
| 9 | ESD | 150pF , 330Ω , ±6kV(Contact) , ±8kV (Air) |
| 10 | Packing VIB | 1.47G , 1-200hz , X , Y , ±Z , 30min/Axis |

R2015-6014-O

| | | | | |
|------------------|------------------------------------|-----|------------|------------|
| PRODUCT GROUP | | REV | ISSUE DATE | BOE |
| TFT- LCD PRODUCT | | P0 | 2018-4-8 | |
| SPEC. NUMBER | SPEC. TITLE | | PAGE | |
| S8-* | BA104S01-300 Product Specification | | 21 OF 28 | |



6.0 PACKING INFORMATION(产品形态 :)

Packing procedure:

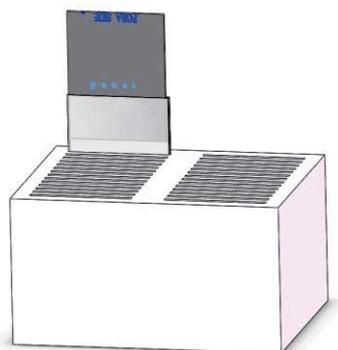

- Put 1pcs Panel into PE Bag
- Crimp PE Bag opening
- Insert 1pcs panel horizontally into the slot
- 28pcs Panel /EPE Box

- Put 1pcs EPE cover upon EPE box
- Put EPE Box& EPE cover into Inner Box
- 28pcs Panel /Inner Box

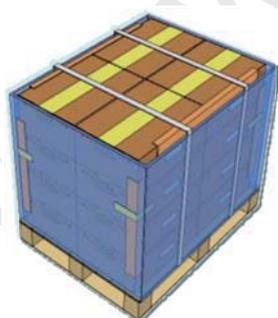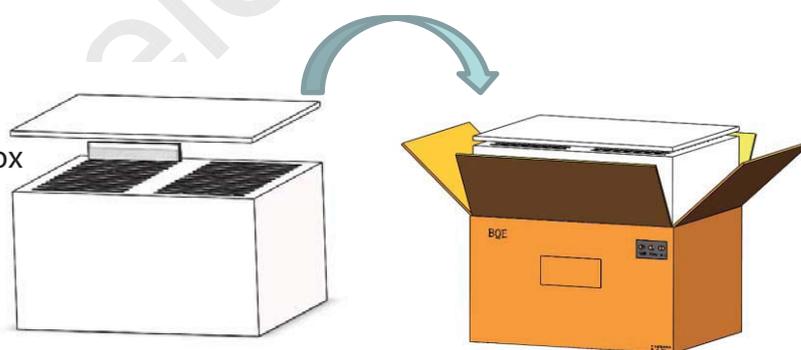

- 4 layers/ Pallet
- 4 boxes/ Layer
- 448pcs Panel / Pallet

6.1 Packing Note(产品形态 : LCM)


- Box Dimension: 500mm(W) x 400mm(D) x 300mm(H)
- Package Quantity in one Box: 28pcs

R2015-6014-O

| | | | | |
|----------------------|---|-----|------------|------------------|
| PRODUCT GROUP | | REV | ISSUE DATE | BOE |
| TFT- LCD PRODUCT | | P0 | 2018-4-8 | |
| SPEC. NUMBER S8-* | SPEC. TITLE BA104S01-300 Product Specification | | | PAGE 22 OF 28 |

6.2 Box label (产品形态 :)

- Label Size :115mm*55mm
- Contents
 Model : LCM
 Q`ty : 28pcs/Box
 Serial No. : Box Serial No. as shown below.
 Date : Packing Date
 FG Code : FG Code of Product

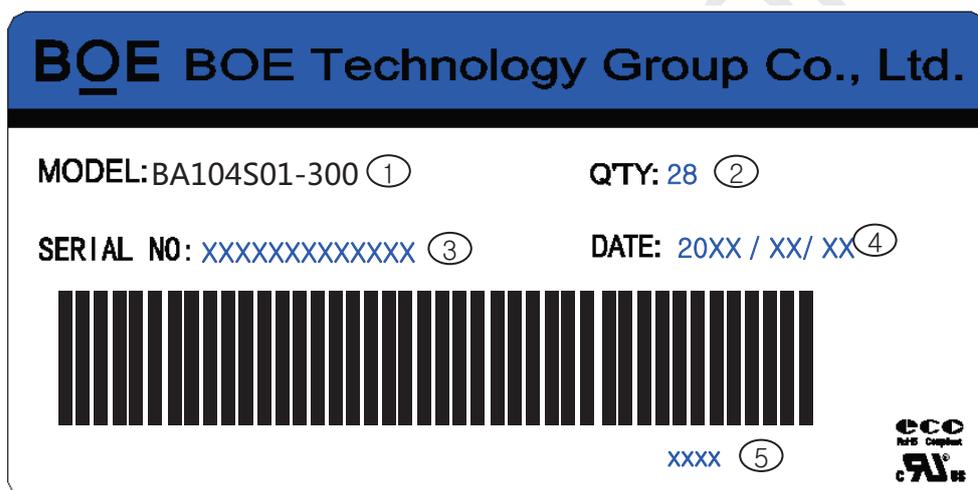


| No. | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 |
|------|-----|---|-------|----|------|---|-------|-----|---------------|----|----|----|----|
| Code | X | X | S | 3 | 1 | 8 | B | 0 | 0 | 0 | 1 | H | D |
| | GBN | | Grade | B3 | Year | | Month | Rev | Serial number | | | | |

R2015-6014-O

| | | | | |
|------------------|------------------------------------|-----|------------|------------|
| PRODUCT GROUP | | REV | ISSUE DATE | BOE |
| TFT- LCD PRODUCT | | P0 | 2018-4-8 | |
| SPEC. NUMBER | SPEC. TITLE | | PAGE | |
| S8-* | BA104S01-300 Product Specification | | 23 OF 28 | |

7.0 Product Label

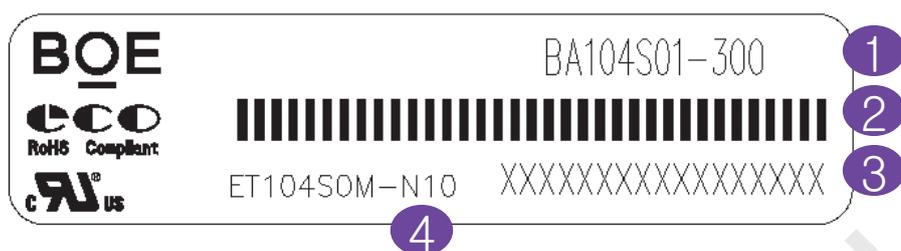

Label Size: 48mmx12mmx0.08mm,
44-9231007

- 1. Customer Code
- 2. MDL ID bar code
- 3. MDL ID
- 4. FG-CODE First 12 digits

BOE MDL ID rule

| No. | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 |
|------|-----|---|-------|----|------|-------|-----|--------------------------|---|----|----|---------------|----|----|----|----|----|
| Code | X | X | S | 3 | 8 | 3 | 2 | D | 8 | 5 | 0 | 0 | 0 | 0 | 0 | 2 | 1 |
| | GBN | | Grade | B3 | Year | Month | Day | FG Code last four digits | | | | Serial number | | | | | |

R2015-6014-O

| | | | | |
|------------------|------------------------------------|-----|------------|------------|
| PRODUCT GROUP | | REV | ISSUE DATE | BOE |
| TFT- LCD PRODUCT | | P0 | 2018-4-8 | |
| SPEC. NUMBER | SPEC. TITLE | | PAGE | |
| S8-* | BA104S01-300 Product Specification | | 24 OF 28 | |

8.0 Handling & Cautions

8.1 Mounting Method

- The panel of the LCD consists of two thin glasses with polarizers which easily get damaged. So extreme care should be taken when handling the LCD.
- Excessive stress or pressure on the glass of the LCD should be avoided. Care must be taken to insure that no torsional or compressive forces are applied to the LCD unit when it is mounted.
- If the customer's set presses the main parts of the LCD, the LCD may show the abnormal display. But this phenomenon does not mean the malfunction of the LCD and should be pressed by the way of mutual agreement.
- To determine the optimum mounting angle, refer to the viewing angle range in the specification for each model.
- Mount a LCD module with the specified mounting parts.

8.2 Caution of LCD Handling and Cleaning

- Since the LCD is made of glass, do not apply strong mechanical impact or static load onto it. Handling with care since shock, vibration, and careless handling may seriously affect the product. If it falls from a high place or receives a strong shock, the glass may be broken.
- The polarizers on the surface of panel are made from organic substances. Be very careful for chemicals not to touch the polarizers or it leads the polarizers to be deteriorated.
- If the use of a chemical is unavoidable, use soft cloth with solvent (recommended below) to clean the LCD 's surface with wipe lightly.
-IPA(Isopropyl Alcohol), Ethyl Alcohol, Trichlorotrifluoroethane
- Do not wipe the LCD's surface with dry or hard materials that will damage the polarizers and others. Do not use the following solvent.
-Water, Ketone, Aromatics
- It is recommended that the LCD be handled with soft gloves during assembly, etc. The polarizers on the LCD's surface are vulnerable to scratch and thus to be damaged by sharp particles.
- Do not drop water or any chemicals onto the LCD's surface.
- A protective film is supplied on the LCD and should be left in place until the LCD is required for operation.
- The ITO pad area needs special careful caution because it could be easily corroded. Do not contact the ITO pad area with HCFC, Soldering flux, Chlorine, Sulfur, saliva or fingerprint. To prevent the ITO corrosion, customers are recommended that the ITO area would be covered by UV or silicon.

R2015-6014-O

| | | | | |
|------------------|------------------------------------|-----|------------|------------|
| PRODUCT GROUP | | REV | ISSUE DATE | BOE |
| TFT- LCD PRODUCT | | P0 | 2018-4-8 | |
| SPEC. NUMBER | SPEC. TITLE | | PAGE | |
| S8-* | BA104S01-300 Product Specification | | 25 OF 28 | |

8.3 Caution Against Static Charge

- The LCD modules use C-MOS LSI drivers, so customers are recommended that any unused input terminal would be connected to Vdd or Vss, do not input any signals before power is turn on, and ground you body, work/assembly area, assembly equipments to protect against static electricity.
- Remove the protective film slowly, keeping the removing direction approximate 30-degree not vertical from panel surface, If possible, under ESD control device like ion blower, and the humidity of working room should be kept over 50%RH to reduce the risk of static charge.
- Avoid the use work clothing made of synthetic fibers. We recommend cotton clothing or other conductivity-treated fibers.
- In handling the LCD, wear non-charged material gloves. And the conducting wrist to the earth and the conducting shoes to the earth are necessary.

8.4 Caution For operation

- It is indispensable to drive the LCD within the specified voltage limit since the higher Voltage than the limit causes the shorter LCD's life. An electro-chemical reaction due to DC causes undesirable deterioration of the LCD so that the use of DC drive should avoid.
- Do not connect or disconnect the LCD to or from the system when power is on.
- Never use the LCD under abnormal conditions of high temperature and high humidity.
- When expose to drastic fluctuation of temperature (hot to cold or cold to hot) ,the LCD may be affected; Specifically, drastic temperature fluctuation from cold to hot ,produces dew on the LCD's surface which may affect the operation of the polarizer and the LCD.
- Response time will be extremely delayed at lower temperature than the operating temperature range and on the other hand at higher temperature LCD may turn black at temperature above its operational range. However those phenomena do not mean malfunction or out of order with the LCD. The LCD will revert to normal operation once the temperature returns to the recommended temperature range for normal operation.
- Do not display the fixed pattern for a long time because it may develop image sticking due to the LCD structure. If the screen is displayed with fixed pattern, use a screen saver.

R2015-6014-O


| PRODUCT GROUP | | REV | ISSUE DATE | BOE |
|--|---|-----|------------------|------------|
| TFT- LCD PRODUCT | | P0 | 2018-4-8 | |
| SPEC. NUMBER S8-* | SPEC. TITLE BA104S01-300 Product Specification | | PAGE 26 OF 28 | |
| <h3>8.5 Packaging</h3> <ul style="list-style-type: none"> ● Modules use LCD element, and must be treated as such. <ul style="list-style-type: none"> -Avoid intense shock and falls from a height. -To prevent modules from degradation, do not operate or store them exposed directly to sunshine or high temperature/humidity for long periods. <h3>8.6 Storage</h3> <ul style="list-style-type: none"> ● A slight dew depositing on terminals is a cause for electro-chemical reaction resulting in terminal open circuit. Relative humidity of the environment should therefore be kept below 60%RH. ● Original protective film should be used on LCD' s surface (polarizer). Adhesive type protective film should be avoided, because it may change color and/or properties of the polarizers. ● Do not store the LCD near organic solvents or corrosive gasses. ● Keep the LCD safe from vibration, shock and pressure. ● Black or white air-bubbles may be produced if the LCD is stored for long time in the lower temperature or mechanical shocks are applied onto the LCD. ● In the case of storing for a long period of time for the purpose or replacement use, the following ways are recommended. <ul style="list-style-type: none"> -Store in a polyethylene bag with sealed so as not to enter fresh air outside in it. -Store in a dark place where neither exposure to direct sunlight nor light is. -Keep temperature in the specified storage temperature range. -Store with no touch on polarizer surface by the anything else. If possible, store the LCD in the packaging situation LCD when it was delivered. <h3>8.7 Safety</h3> <ul style="list-style-type: none"> ● For the crash damaged or unnecessary LCD, it is recommended to wash off liquid crystal by either of solvents such as acetone and ethanol an should be burned up later. ● In the case the LCD is broken, watch out whether liquid crystal leaks out or not. If your hands touch the liquid crystal, wash your hands cleanly with water an soap as soon as possible. ● If you should swallow the liquid crystal, first, wash your mouth thoroughly with water, then drink a lot of water and induce vomiting, and then, consult a physician. ● If the liquid crystal should get in your eyes, flush your eyes with running water for at least fifteen minutes. ● If the liquid crystal touches your skin or clothes, remove it and wash the affected part of your skin or clothes with soap and running water. | | | | |

R2015-6014-O

| | | | | |
|------------------|------------------------------------|-----|------------|------------|
| PRODUCT GROUP | | REV | ISSUE DATE | BOE |
| TFT- LCD PRODUCT | | P0 | 2018-4-8 | |
| SPEC. NUMBER | SPEC. TITLE | | PAGE | |
| S8-* | BA104S01-300 Product Specification | | 27 OF 28 | |

9.0 APPENDIX


Mechanical Drawing Drawing Attachment: Front

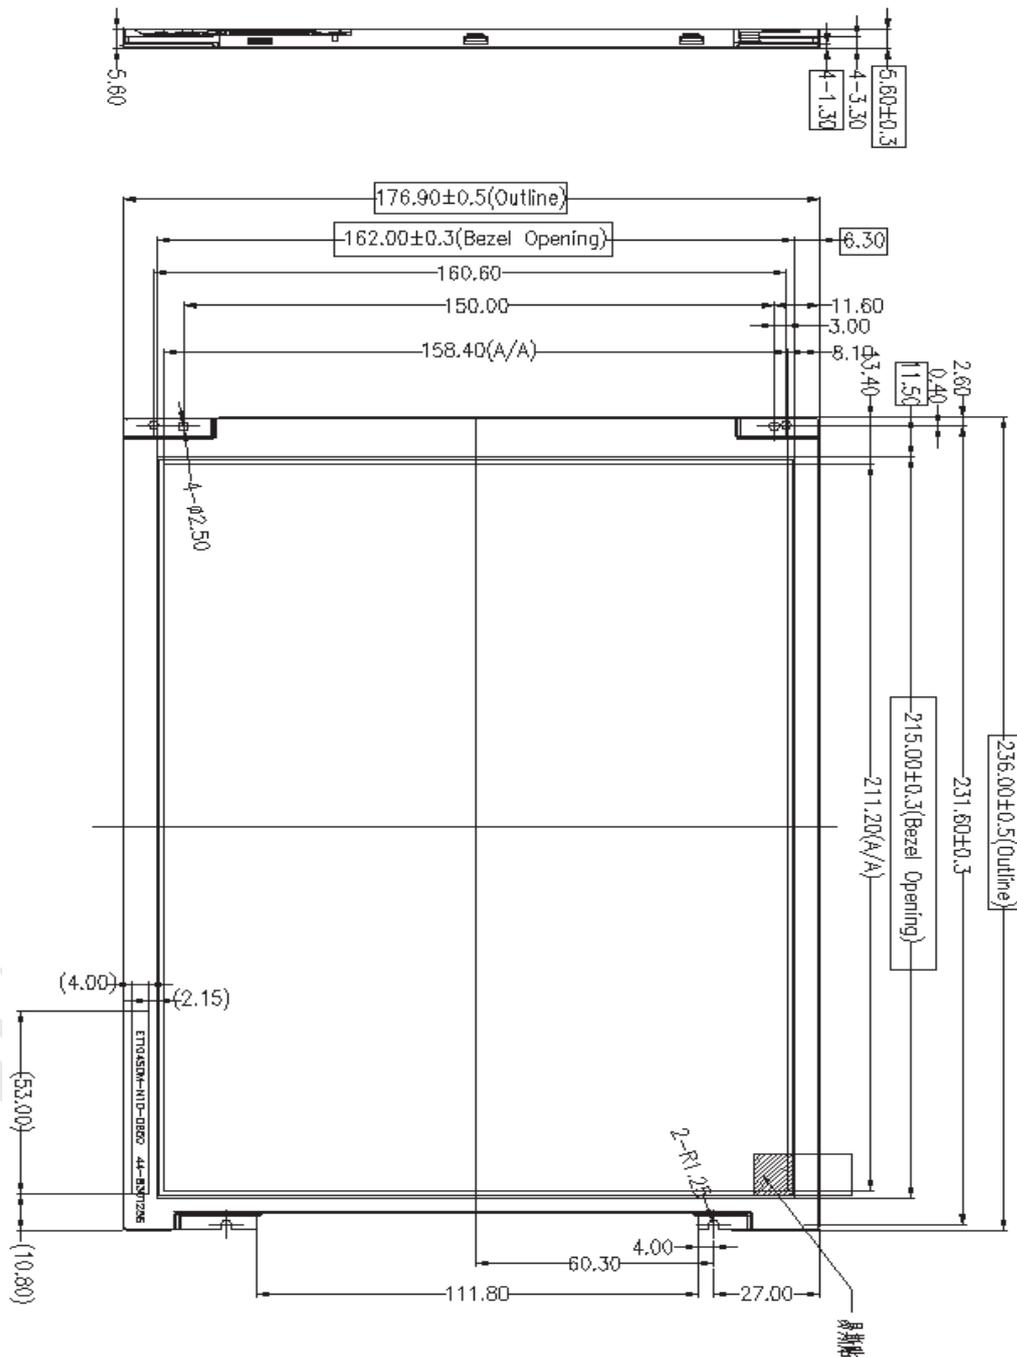

R2015-6014-O

| | | | | |
|------------------|------------------------------------|-----|------------|------------|
| PRODUCT GROUP | | REV | ISSUE DATE | BOE |
| TFT- LCD PRODUCT | | P0 | 2018-4-8 | |
| SPEC. NUMBER | SPEC. TITLE | | PAGE | |
| S8-* | BA104S01-300 Product Specification | | 28 OF 28 | |

Mechanical Drawing
Drawing Attachment: Back

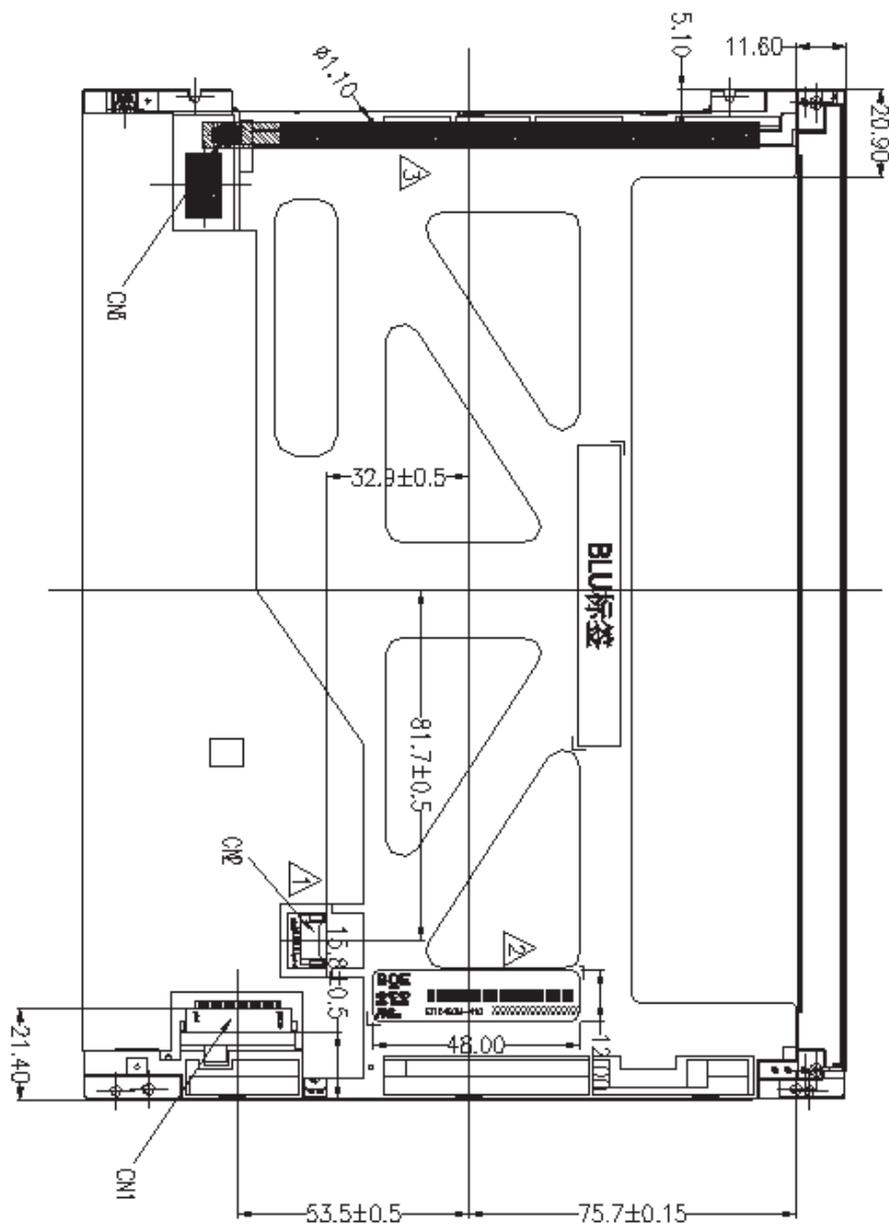

R2015-6014-O