

**BOE****PROPRIETARY NOTE**

THIS SPECIFICATION IS THE PROPERTY OF BOE AND SHALL NOT BE REPRODUCED OR COPIED WITHOUT THE WRITTEN PERMISSION OF BOE AND MUST BE RETURNED TO BOE UPON ITS REQUEST

**TITLE : NV156FHM-N6A V8.1**

**Product Specification**

**Rev. P0**

**BOE Optoelectronics Technology Co., Ltd**

SPEC. NUMBER

PRODUCT GROUP

Rev.

ISSUE DATE

PAGE

TFT-LCD

P0

2020.09.01

1 OF 65

DAS-RD-2019008-O

A4(210 X 297)

**BOE**

PRODUCT GROUP

REV

ISSUE DATE

Customer Spec

P0

2020.09.01

**REVISION HISTORY** Preliminary Specification Final Specification

Revision No.	Page	Description of Changes	Date	Prepared
P0	65	Preliminary Specification	2020.09.01	Liu Jie

**REVIEWED****Designer****Manager**

Zhang Shouqiang (Array)

Wang Wu

Li Yang(Cell)

Li Zhe

Weng Hongtao/Qin Ming (CF)

Wang Wu/Li Min

Fang Xiang (EE)

Xu Bo

Ran Wei(MO)

Luo Wencheng

Liu Hanlin(QE)

Cui Chaoyang

Wang Di(PI)

Cheng Gang

**APPROVED**

Liu Jie(PM)

SPEC. NUMBER

SPEC. TITLE

PAGE

NV156FHM-N6A V8.1 Product Specification Rev. P0

2 OF 65

A4(210 X 297)

**BOE**

PRODUCT GROUP

REV

ISSUE DATE

Customer Spec

P0

2020.09.01

## Contents

No.	Items	Page
1.0	General Description	4
2.0	Absolute Maximum Ratings	6
3.0	Electrical Specifications	7
4.0	Optical Specifications	11
5.0	Interface Connection	16
6.0	Signal Timing Specification	20
7.0	Input Signals, Display Colors & Gray Scale of Colors	25
8.0	Power Sequence	26
9.0	Connector Description	28
10.0	Mechanical Characteristics	29
11.0	Reliability Test	30
12.0	Handling & Cautions	31
13.0	Label	32
14.0	Packing Information	34
15.0	Mechanical Outline Dimension	35
16.0	EDID Table	36
17.0	General Precautions	41
18.0	Appendix	43

SPEC. NUMBER

SPEC. TITLE

PAGE

NV156FHM-N6A V8.1 Product Specification Rev. P0

3 OF 65

DAS-RD-2019008-O

A4(210 X 297)

**BOE**

PRODUCT GROUP

REV

ISSUE DATE

Customer Spec

P0

2020.09.01

## 1.0 GENERAL DESCRIPTION

### 1.1 Introduction

NV156FHM-N6A V8.1 is a color active matrix TFT LCD module using amorphous silicon TFT's (Thin Film Transistors) as an active switching devices. This module has a 15.6 inch diagonally measured active area with Full-HD resolutions (1920 horizontal by 1080 vertical pixel array). Each pixel is divided into RED, GREEN, BLUE dots which are arranged in vertical stripe and this module can display 16.2M(6bits+FRC) colors and color gamut sRGB 100%. The TFT-LCD panel used for this module is a low reflection and higher color type. Therefore, this module is suitable for Notebook PC. The LED driver for back-light driving is built in this model. All input signals are eDP1.2 interface compatible.

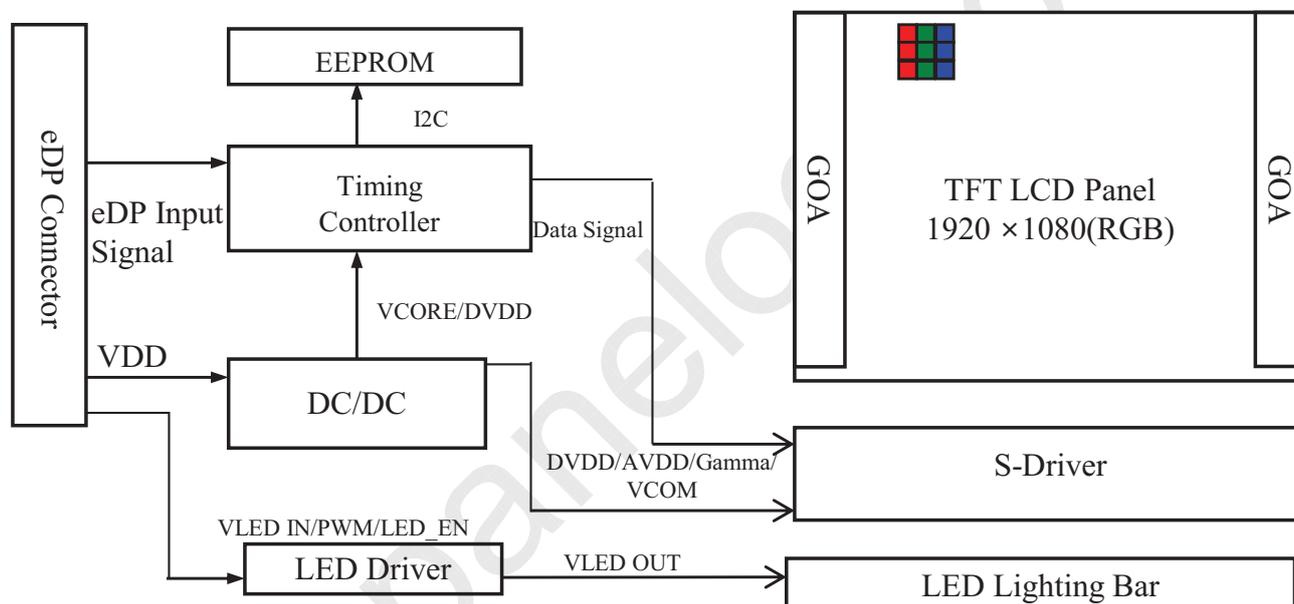


Figure 1. Drive Architecture

### 1.2 Features

- 2 lane eDP interface with 2.7Gbps link rates
- Thin and light weight
- 16.2M(6bits+FRC) color depth, color gamut sRGB 100%
- Single LED lighting bar (Bottom side/Horizontal Direction)
- Data enable signal mode
- Side mounting frame
- Green product (RoHS & Halogen free product)
- On board LED driving circuit
- Low driving voltage and low power consumption
- On board EDID chip
- DPCD Version 1.1
- Adjust backlight brightness with DC mode
- Function : BIST/FRC/ Free Sync

SPEC. NUMBER

SPEC. TITLE

PAGE

NV156FHM-N6A V8.1 Product Specification Rev. P0

4 OF 65

DAS-RD-2019008-O

A4(210 X 297)

**BOE**

PRODUCT GROUP

REV

ISSUE DATE

Customer Spec

P0

2020.09.01

**1.3 Application**

- Notebook PC (Wide type)

**1.4 General Specification**

The followings are general specifications at the model NV156FHM-N6A V8.1. (listed in Table 1)

&lt;Table 1. General Specifications&gt;

Parameter	Specification	Unit	Remarks
Active area	344.16(H) × 193.59(V)	mm	
Number of pixels	1920 (H) × 1080 (V)	pixels	
Pixel pitch	179.25(H) × 179.25(V)	um	
Pixel arrangement	RGB Vertical stripe		
Display colors	16.2M(6bits+FRC)		
Color gamut	sRGB 100%		
Display mode	Normally Black		
Dimensional outline	350.66±0.3 (H)*205.25±0.3(V)(W/O PCB)*2.6 (Max) 350.66±0.3(H)*214.75±0.5(V) (W/PCB)*2.6 (Max)	mm	
Weight	280(max)	g	
Surface treatment	AG		
Surface hardness	3H		
Back-light	Bottom edge side, 1-LED lighting bar type		Note 1
Power consumption	$P_D$ : 0.75(Max.)	W	@Mosaic
	$P_{BL}$ : 3.3(Max.)	W	
	$P_{Total}$ : 4.05(Max.)	W	@Mosaic

Notes : 1. LED Lighting Bar (50\*LED Array)

SPEC. NUMBER

SPEC. TITLE

PAGE

NV156FHM-N6A V8.1 Product Specification Rev. P0

5 OF 65

DAS-RD-2019008-O

A4(210 X 297)

**BOE**

PRODUCT GROUP

REV

ISSUE DATE

Customer Spec

P0

2020.09.01

## 2.0 ABSOLUTE MAXIMUM RATINGS

The followings are maximum values which, if exceed, may cause faulty operation or damage to the unit. The operational and non-operational maximum voltage and current values are listed in Table 2.

&lt; Table 2. Absolute Maximum Ratings &gt;

Ta=25+/-2°C


Parameter	Symbol	Min.	Max.	Unit	Remarks
Power Supply Voltage	V <sub>DD</sub>	-0.3	4.0	V	Note 1
eDP input Voltage	V <sub>eDP</sub>	0	2.0	V	
Logic Supply Voltage	V <sub>IN</sub>	V <sub>SS</sub> -0.3	V <sub>DD</sub> +0.3	V	
Operating Temperature	T <sub>OP</sub>	0	+50	°C	Note 2
Storage Temperature	T <sub>ST</sub>	-20	+60	°C	

Notes :

1. Permanent damage to the device may occur if maximum values are exceeded functional operation should be restricted to the condition described under normal operating conditions.

2. Temperature and relative humidity range are shown in the figure below.

90 % RH Max. ( 40 °C ≥ Ta) Maximum wet - bulb temperature at 39 °C or less. (Ta > 40 °C ) No condensation.

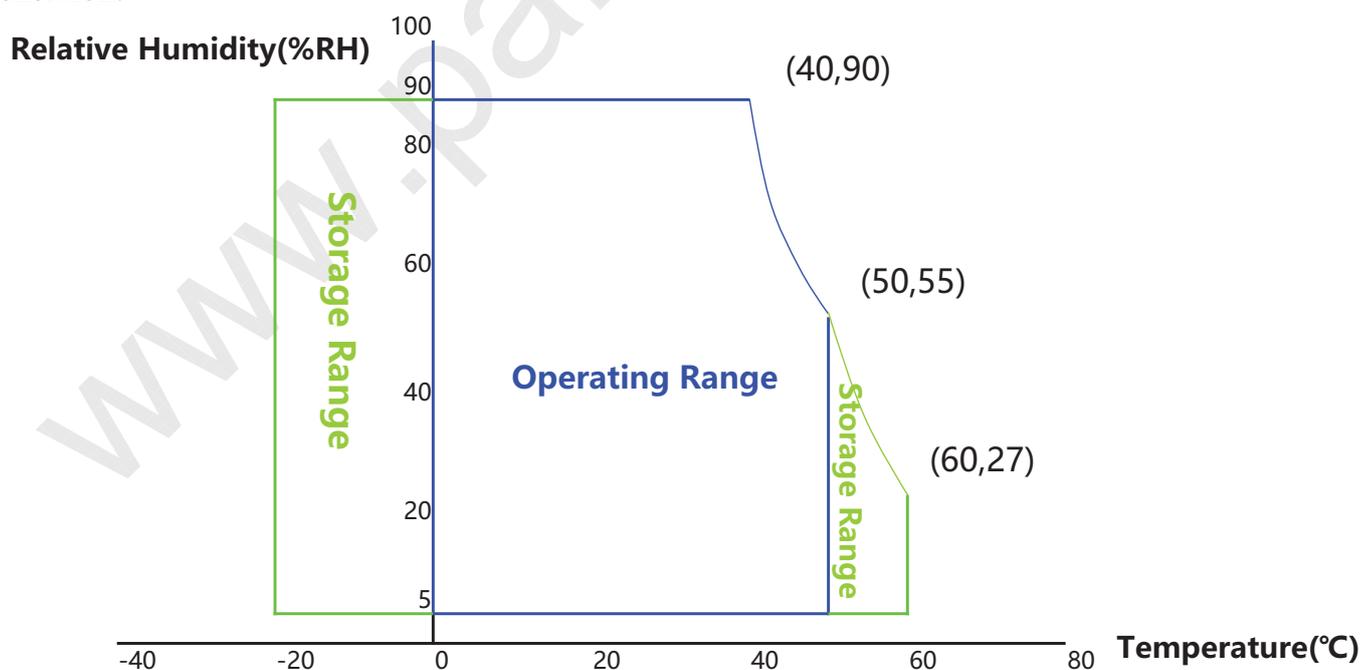

SPEC. NUMBER

SPEC. TITLE

PAGE

NV156FHM-N6A V8.1 Product Specification Rev. P0

6 OF 65

DAS-RD-2019008-O

A4(210 X 297)

**BOE**

PRODUCT GROUP

REV

ISSUE DATE

Customer Spec

P0

2020.09.01

**3.0 ELECTRICAL SPECIFICATIONS****3.1 Electrical Specifications**

&lt; Table 3. Electrical Specifications &gt;

Ta=25+/-2°C

Parameter		Min.	Typ.	Max.	Unit	Remarks	
Power Supply Voltage	V <sub>DD</sub>	3.0	3.3	3.6	V	Note 1	
Permissible Input Ripple Voltage	V <sub>RF</sub>	-10% VDD	-	+10% VDD	V	Note 4	
BIST Control Level	High Level	2	-	3.3	V	@V <sub>DDIO</sub> =2.5 V	
	Low Level	0	-	0.25	V		
Power Supply Inrush Current	Inrush	-	-	2	A	Note3	
Power Supply Current	Mosaic	I <sub>DD</sub>	-	-	227	mA	Note 1
	RGB		-	-	333	mA	
Power Consumption	Mosaic	P <sub>M</sub>	-	-	0.75	W	
	RGB	P <sub>RGB</sub>	-	-	1.1	W	
	BLU	P <sub>BL</sub>	-	-	3.3	W	Note 2
	Total	P <sub>Total</sub>	-	-	4.05	W	@Mosaic

SPEC. NUMBER

SPEC. TITLE

PAGE

NV156FHM-N6A V8.1 Product Specification Rev. P0

7 OF 65

DAS-RD-2019008-O

A4(210 X 297)

**BOE**

PRODUCT GROUP

REV

ISSUE DATE

Customer Spec

P0

2020.09.01

### 3.0 ELECTRICAL SPECIFICATIONS

#### 3.1 Electrical Specifications


Notes :

1. The supply voltage is measured and specified at the interface connector of LCM.


The current draw and power consumption specified is for 3.3V at 25 °C.

a) Mosaic pattern 8\*8

b) R/G/B patterns



(a)

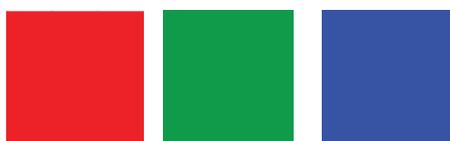

(b)

Figure 3. Power Measure Patterns

2. Calculated value for reference ( $V_{LED} \times I_{LED}$ )

3. Measure condition (Figure 4)

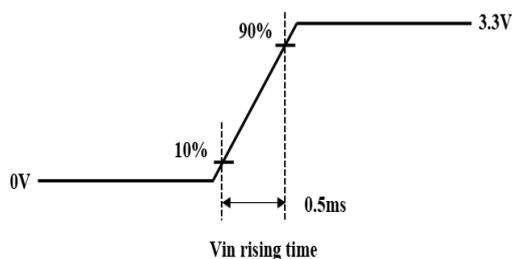


Figure 4. Inrush Measure Condition

4. Input voltage range:3.0~3.6V.Test condition: Oscilloscope bandwidth 20MHz, AC coupling

SPEC. NUMBER

SPEC. TITLE

PAGE

NV156FHM-N6A V8.1 Product Specification Rev. P0

8 OF 65

DAS-RD-2019008-O

A4(210 X 297)

**BOE**

PRODUCT GROUP

REV

ISSUE DATE

Customer Spec

P0

2020.09.01

**3.2 Backlight Unit**

&lt; Table 4. LED Driving Guideline Specifications &gt;

Ta=25+/-2°C

Parameter		Min.	Typ.	Max.	Unit	Remarks	
LED Forward Voltage	$V_F$	-	-	2.9	V		
LED Forward Current	$I_F$	-	19.6	-	mA		
LED Power Input Voltage	VLED	5	12	21	V		
LED Power Input Current	$I_{LED}$	-	-	Max.	mA	Note 1	
LED Power Consumption	$P_{LED}$	-	-	3.3	W		
Power Supply Voltage for LED Driver Inrush	Iled inrush	-	-	2	A	Note 3	
LED Life-Time	N/A	15,000	-	-	Hour	$I_F = 19.6mA$ Note 2	
EN Control Level	Backlight On	$V_{BL\_EN}$	2.2	-	3.6	V	
	Backlight Off		0	-	0.5	V	
PWM Control Level	High Level	$V_{BL\_PWM}$	2.2	-	3.6	V	
	Low Level		0	-	0.5	V	
PWM Control Frequency	$F_{PWM}$	200	-	2,000	Hz		
Duty Ratio		1	-	100	%		

Notes :

1. Power supply voltage 12V for LED driver.

Calculator value for reference  $I_F \times V_F \times 50 / \text{driver efficiency} = P_{LED}$ 

2. The LED life-time define as the estimated time to 50% degradation of initial luminous.

3. Measure condition (Figure 5)

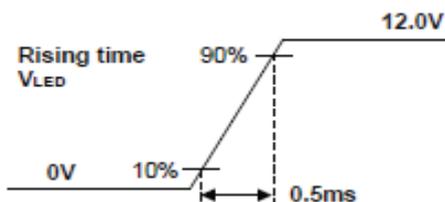


Figure 5. Inrush Measure Condition

SPEC. NUMBER

SPEC. TITLE

PAGE

NV156FHM-N6A V8.1 Product Specification Rev. P0

9 OF 65

DAS-RD-2019008-O

A4(210 X 297)

**BOE**

PRODUCT GROUP

REV

ISSUE DATE

Customer Spec

P0

2020.09.01

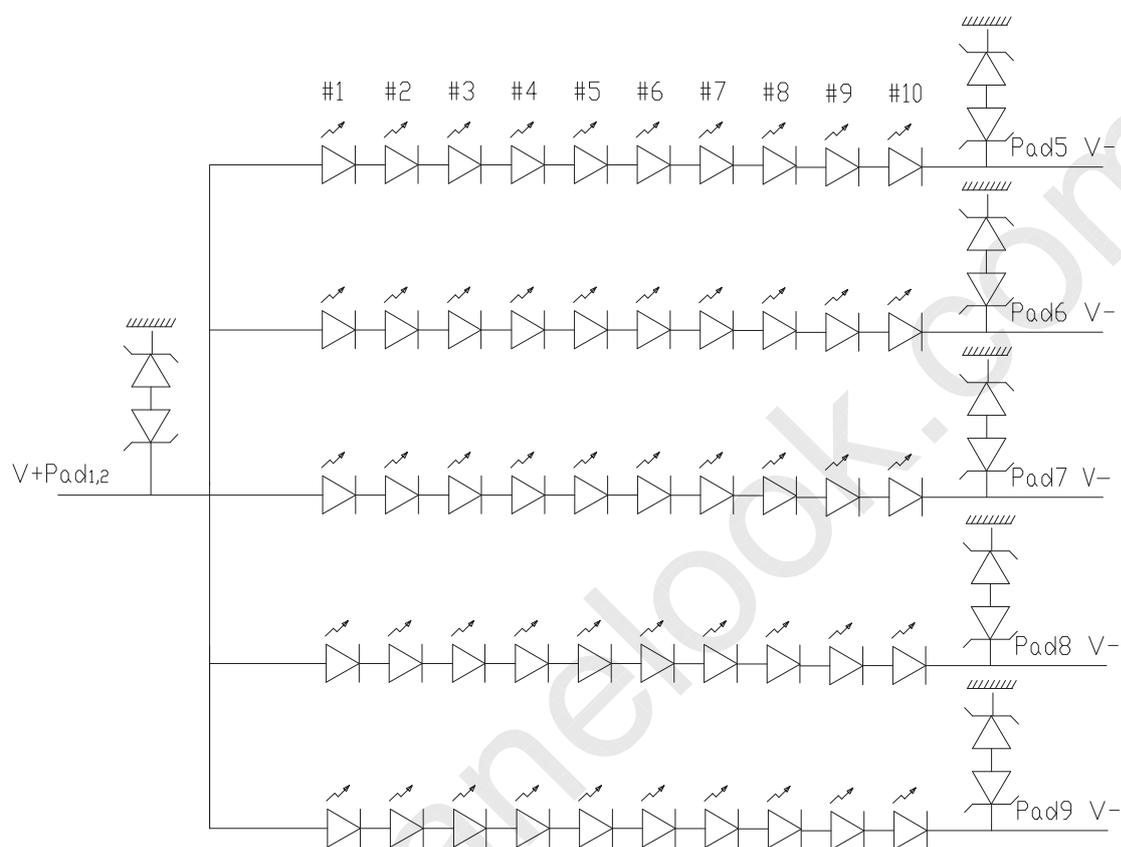
**3.3 LED Structure**

Figure 6. LED Structure

SPEC. NUMBER

SPEC. TITLE

PAGE

NV156FHM-N6A V8.1 Product Specification Rev. P0

10 OF 65

DAS-RD-2019008-O

A4(210 X 297)

**BOE**

PRODUCT GROUP

REV

ISSUE DATE

Customer Spec

P0

2020.09.01

## 4.0 OPTICAL SPECIFICATION

### 4.1 Overview

The test of optical specifications shall be measured in a dark room (ambient luminance  $\leq 1$  lux and temperature =  $25 \pm 2^\circ\text{C}$ ) with the equipment of luminance meter system (PR730&PR810) and test unit shall be located at an approximate distance 50cm from the LCD surface at a viewing angle of  $\theta$  and  $\Phi$  equal to  $0^\circ$ . We refer to  $\theta\Phi=0$  ( $=\theta_3$ ) as the 3 o'clock direction (the "right"),  $\theta\Phi=90$  ( $=\theta_{12}$ ) as the 12 o'clock direction ("upward"),  $\theta\Phi=180$  ( $=\theta_9$ ) as the 9 o'clock direction ("left") and  $\theta\Phi=270$  ( $=\theta_6$ ) as the 6 o'clock direction ("bottom"). While scanning  $\theta$  and/or  $\Phi$ , the center of the measuring spot on the display surface shall stay fixed. The backlight should be operating for 30 minutes prior to measurement. VDD shall be  $3.3 \pm 0.3\text{V}$  at  $25^\circ\text{C}$ . Optimum viewing angle direction is 6 o'clock.

### 4.2 Optical Specifications

&lt;Table 5. Optical Specifications&gt;

Parameter		Symbol	Condition	Min.	Typ.	Max.	Unit	Remark
Viewing Angle Range	Horizontal	$\theta_3$	CR > 10	-	85	-	Deg.	Note 1
		$\theta_9$		-	85	-	Deg.	
	Vertical	$\theta_{12}$		-	85	-	Deg.	
		$\theta_6$		-	85	-	Deg.	
Luminance Contrast Ratio		CR	$\theta = 0^\circ$	-	1200	-		Note 2
Luminance of White	5 Points	$Y_w$	$\theta = 0^\circ$ ILED = 19.6mA	255	300	375	cd/m <sup>2</sup>	Note 3
White Luminance Uniformity	5 Points	$\Delta Y_5$		80	-	-	%	Note 4
	13 Points	$\Delta Y_{13}$		60	-	-	%	
White Chromaticity		$W_x$	$\theta = 0^\circ$	0.283	0.313	0.343		Note 5
		$W_y$		0.299	0.329	0.359		
Reproduction of Color	Red	$R_x$	$\theta = 0^\circ$	Typ.-0.03	0.646	Typ.+0.03		
		$R_y$			0.334			
	Green	$G_x$			0.303			
		$G_y$			0.611			
	Blue	$B_x$			0.152			
		$B_y$			0.064			
Color Gamut(sRGB Match@1931)				95	100	-	%	
Response Time (Rising + Falling)		$T_{RT}$	Ta= $25^\circ\text{C}$ $\theta = 0^\circ$	-	20	25	ms	Note 6
Cross Talk		CT	$\theta = 0^\circ$	-	-	2.0	%	Note 7

SPEC. NUMBER

SPEC. TITLE

PAGE

NV156FHM-N6A V8.1 Product Specification Rev. P0

11 OF 65

DAS-RD-2019008-O

A4(210 X 297)

**BOE**

PRODUCT GROUP

REV

ISSUE DATE

Customer Spec

P0

2020.09.01

## Notes :

- Viewing angle is the angle at which the contrast ratio is greater than 10. The viewing angles are determined for the horizontal or 3, 9 o'clock direction and the vertical or 6, 12 o'clock direction with respect to the optical axis which is normal to the LCD surface (see Figure 7).
- Contrast measurements shall be made at viewing angle of  $\Theta = 0$  and at the center of the LCD surface. Luminance shall be measured with all pixels in the view field set first to white, then to the dark (black) state . (see Figure 7) Luminance Contrast Ratio (CR) is defined mathematically.
 
$$CR = \frac{\text{Luminance when displaying a white raster}}{\text{Luminance when displaying a black raster}}$$
- Center Luminance of white is defined as luminance values of 5 point average across the LCD surface. Luminance shall be measured with all pixels in the view field set first to white. This measurement shall be taken at the locations shown in Figure 8 for a total of the measurements per display.
- The White luminance uniformity on LCD surface is then expressed as :  $\Delta Y = \text{Minimum Luminance of 5(or 13) points} / \text{Maximum Luminance of 5(or 13) points.}$ (see Figure 8 and Figure 9).
- The color chromaticity coordinates specified in Table 5 shall be calculated from the spectral data measured with all pixels first in red, green, blue and white. Measurements shall be made at the center of the panel.
- The electro-optical response time measurements shall be made as Figure 10 by switching the "data" input signal ON and OFF. The times needed for the luminance to change from 10% to 90% is  $T_f$ , and 90% to 10% is  $T_r$ .
- Cross-Talk of one area of the LCD surface by another shall be measured by comparing the luminance (YA) of a 25mm diameter area, with all display pixels set to a gray level, to the luminance (YB) of that same area when any adjacent area is driven dark. (See Figure 11).

SPEC. NUMBER

SPEC. TITLE

PAGE

NV156FHM-N6A V8.1 Product Specification Rev. P0

12 OF 65

DAS-RD-2019008-O

A4(210 X 297)

<b>BOE</b>	PRODUCT GROUP	REV	ISSUE DATE
	Customer Spec	P0	2020.09.01

### 4.3 Optical Measurements

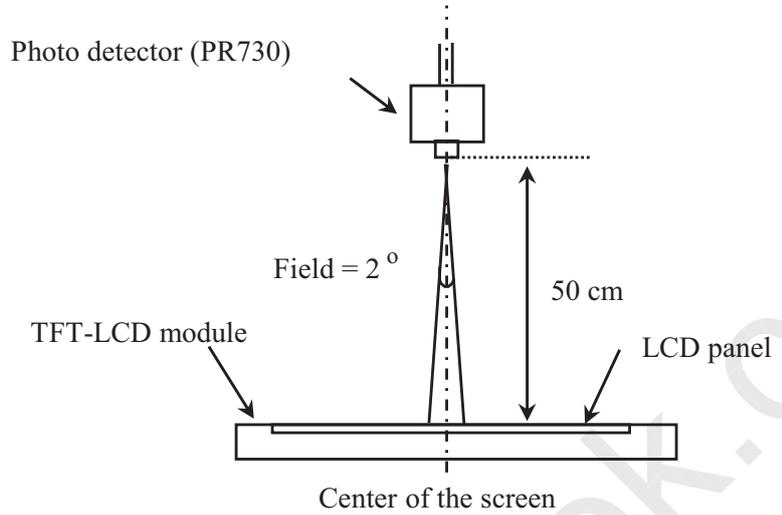


Figure 7. Measurement Set Up

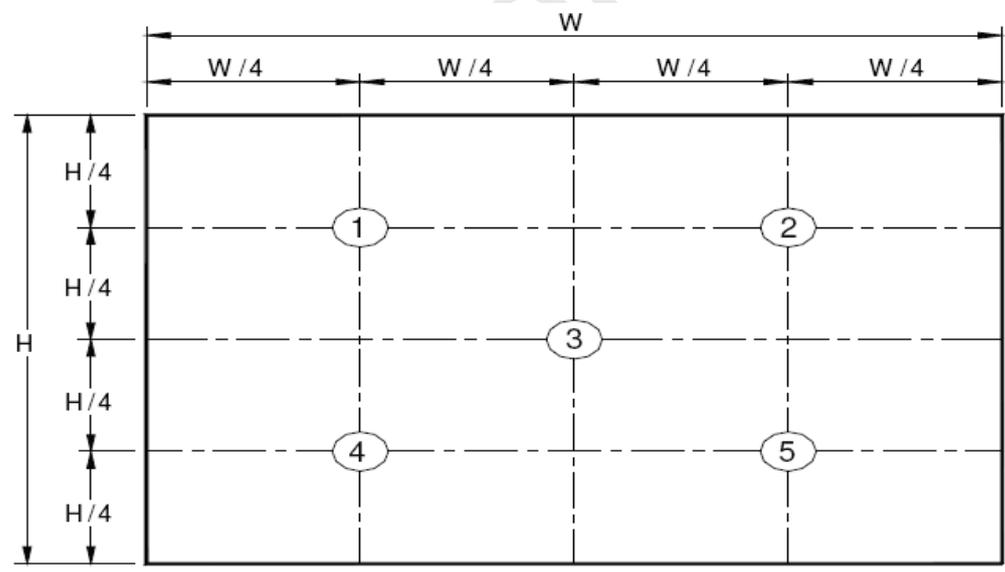


Figure 8. White Luminance and Uniformity Measurement Locations (5 points)

Center Luminance of white is defined as luminance values of center 5 points across the LCD surface. Luminance shall be measured with all pixels in the view field set first to white. This measurement shall be taken at the locations shown in Figure 7 for a total of the measurements per display.

SPEC. NUMBER	SPEC. TITLE	PAGE
DAS-RD-2019008-O	NV156FHM-N6A V8.1 Product Specification Rev. P0	13 OF 65

<b>BOE</b>	PRODUCT GROUP	REV	ISSUE DATE
	Customer Spec	P0	2020.09.01

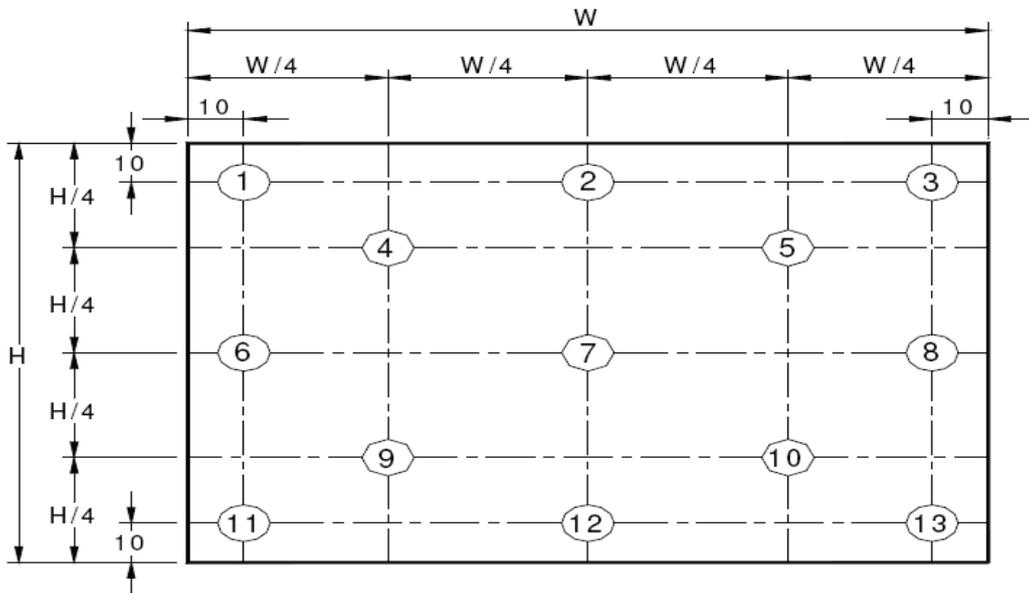


Figure 9. Uniformity Measurement Locations (13 points)

The White luminance uniformity on LCD surface is then expressed as :  $\Delta Y_5 = \text{Minimum Luminance of five points} / \text{Maximum Luminance of five points}$  (see Figure 8) ,  $\Delta Y_{13} = \text{Minimum Luminance of 13 points} / \text{Maximum Luminance of 13 points}$  (see Figure 9).

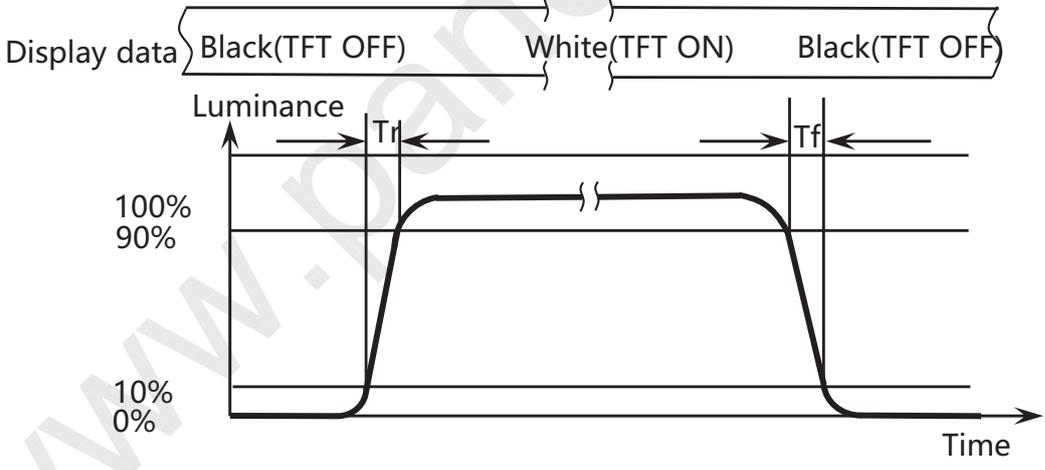



Figure 10. Response Time Testing

The electro-optical response time measurements shall be made as shown in Figure 10 by switching the “data” input signal ON and OFF. Tr: The luminance to change from 10% to 90% ,Tf: The luminance to change from 90% to 10% .

The test system : LMS PR810

SPEC. NUMBER	SPEC. TITLE	PAGE
DAS-RD-2019008-O	NV156FHM-N6A V8.1 Product Specification Rev. P0	14 OF 65

<b>BOE</b>	PRODUCT GROUP	REV	ISSUE DATE
	Customer Spec	P0	2020.09.01

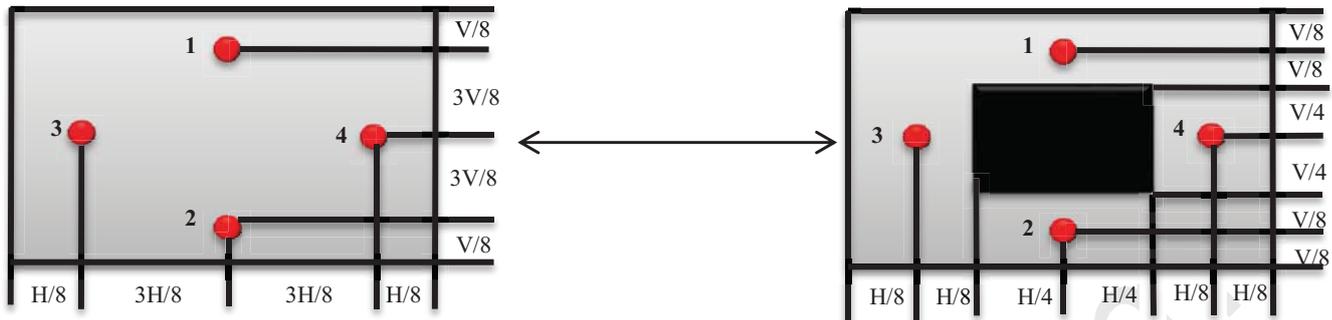

$$\text{Cross Talk (\%)} = \left| \frac{Y_B - Y_A}{Y_A} \right| \times 100$$

Figure 11. Cross Talk Modulation Test Description

Where:

$Y_A$  = Initial luminance of measured area (cd/m<sup>2</sup>)

$Y_B$  = Subsequent luminance of measured area (cd/m<sup>2</sup>)

The location 1/2/3/4 measured will be exactly the same in both patterns. The test background gray is from L64 to L192. Take the largest data as the result.

Cross Talk of one area of the LCD surface by another shall be measured by comparing the luminance ( $Y_A$ ) of a 25mm diameter area, with all display pixels set to a gray level, to the luminance ( $Y_B$ ) of that same area when any adjacent area is driven dark. (Refer to Figure 11)

The test system: PR730

SPEC. NUMBER	SPEC. TITLE	PAGE
DAS-RD-2019008-O	NV156FHM-N6A V8.1 Product Specification Rev. P0	15 OF 65

**BOE**

PRODUCT GROUP

REV

ISSUE DATE

Customer Spec

P0

2020.09.01

## 5.0 INTERFACE CONNECTION

### 5.1 Electrical Interface Connection

The electronics interface connector is STM MSAK24025P30.

The connector interface pin assignments are listed in Table 6.

<Table 6. Pin Assignments for the Interface Connector>

Terminal	Symbol	Functions
Pin No.	Symbol	Description
1	NC	No Connection
2	H_GND	Ground
3	LANE1_N	eDP RX Channel 1 Negative
4	LANE1_P	eDP RX Channel 1 Positive
5	H_GND	Ground
6	LANE0_N	eDP RX Channel 0 Negative
7	LANE0_P	eDP RX Channel 0 Positive
8	H_GND	Ground
9	AUX_CH_P	eDP AUX CH Positive
10	AUX_CH_N	eDP AUX CH Negative
11	H_GND	Ground
12	LCD_VCC	Power Supply, 3.3V (typ.)
13	LCD_VCC	Power Supply, 3.3V (typ.)
14	BIST	Panel Self Test Enable
15	H_GND	Ground
16	H_GND	Ground
17	HPD	Hot Plug Detect Output
18	BL_GND	LED Ground
19	BL_GND	LED Ground
20	BL_GND	LED Ground
21	BL_GND	LED Ground
22	BL_ENABLE	LED Enable Pin(+3.3V Input)
23	BL_PWM	System PWM Signal Input
24	NC	No Connection
25	NC	No Connection
26	BL_POWER	LED Power Supply 5V-21V
27	BL_POWER	LED Power Supply 5V-21V
28	BL_POWER	LED Power Supply 5V-21V
29	BL_POWER	LED Power Supply 5V-21V
30	NC	No Connection

SPEC. NUMBER

SPEC. TITLE

PAGE

NV156FHM-N6A V8.1 Product Specification Rev. P0

16 OF 65

DAS-RD-2019008-O

A4(210 X 297)

<b>BOE</b>	PRODUCT GROUP	REV	ISSUE DATE
	Customer Spec	P0	2020.09.01

## 5.2 eDP Interface

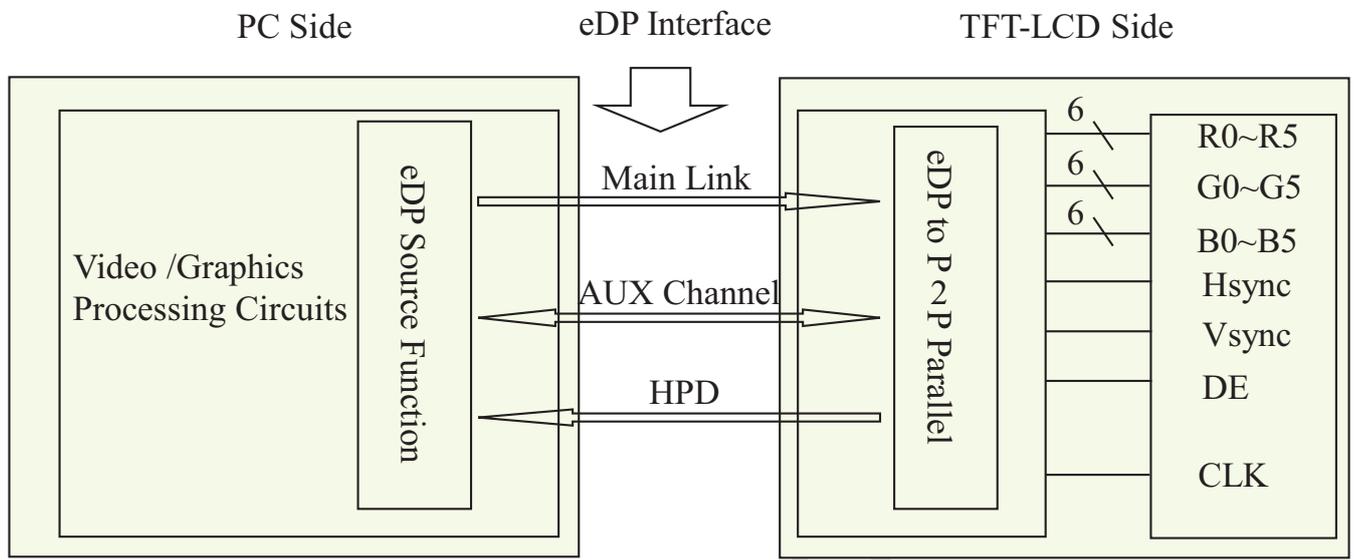


Figure 12. eDP Interface Architecture

Note:

Transmitter : Parade DP501 or equivalent.

Transmitter is not contained in module.

SPEC. NUMBER	SPEC. TITLE	PAGE
DAS-RD-2019008-O	NV156FHM-N6A V8.1 Product Specification Rev. P0	17 OF 65

**BOE**

PRODUCT GROUP

REV

ISSUE DATE

Customer Spec

P0

2020.09.01

### 5.3 Data Input Format

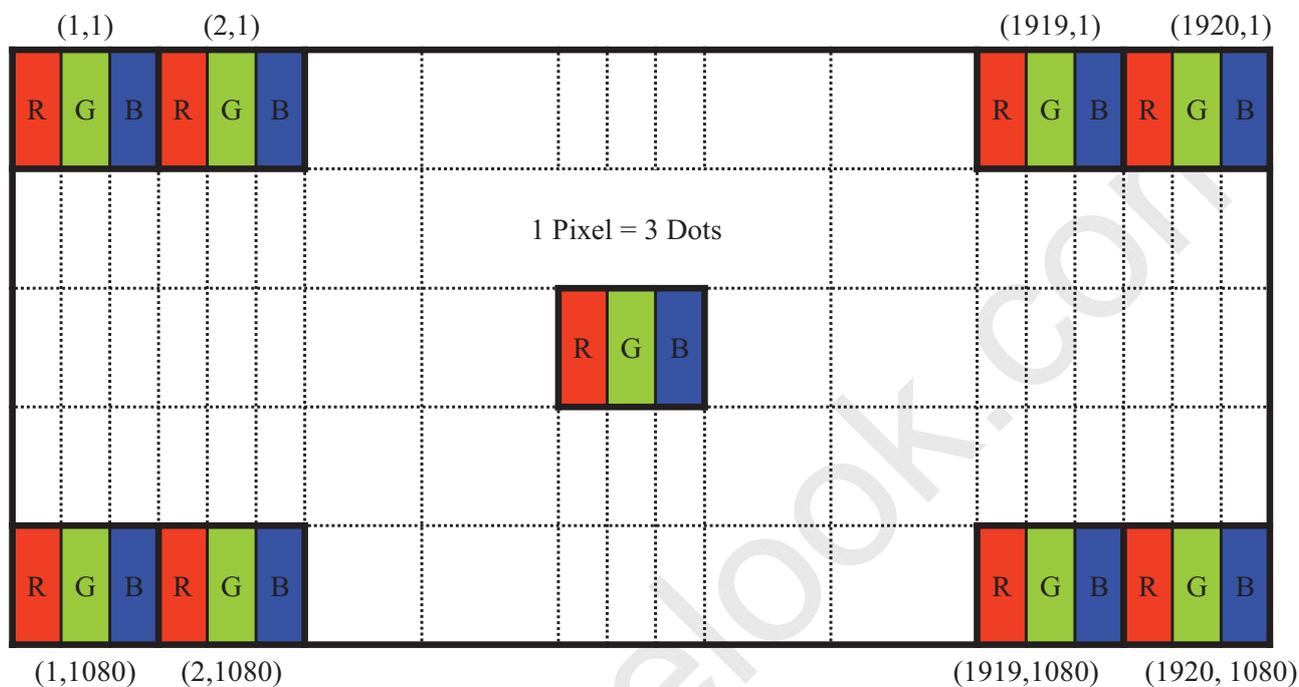


Figure 13. Display Position of Input Data (V-H)

SPEC. NUMBER

SPEC. TITLE

PAGE

NV156FHM-N6A V8.1 Product Specification Rev. P0

18 OF 65

DAS-RD-2019008-O

A4(210 X 297)

**BOE**

PRODUCT GROUP

REV

ISSUE DATE

Customer Spec

P0

2020.09.01

**5.4 Back-light & LCM Interface Connection**

BLU Interface Connector: STM MSK24037P9 or Compatible.

&lt;Table 7. Pin Assignments for the BLU Connector&gt;

Pin No.	Symbol	Description	Pin No.	Symbol	Description
1	LED	LED cathode connection	6	NC	No Connection
2	LED	LED cathode connection	7	NC	No Connection
3	LED	LED cathode connection	8	Vout	LED anode connection
4	LED	LED cathode connection	9	Vout	LED anode connection
5	LED	LED cathode connection			

SPEC. NUMBER

SPEC. TITLE

PAGE

NV156FHM-N6A V8.1 Product Specification Rev. P0

19 OF 65

DAS-RD-2019008-O

A4(210 X 297)

**BOE**

PRODUCT GROUP

REV

ISSUE DATE

Customer Spec

P0

2020.09.01

**6.0 SIGNAL TIMING SPECIFICATION****6.1 The NV156FHM-N6A V8.1 Is Operated By The DE Only**

&lt; Table 8. Signal Timing Specification &gt;

Item		Symbols	Min	Typ	Max	Unit
Clock	Frequency	1/Tc	151.6	152.6	153.5	MHz
Frame Period		Tv	1157	1160	1163	lines
			-	60	-	Hz
			-	16.67	-	ms
Vertical Display Period		Tvd	-	1080	-	lines
One line Scanning Period		Th	2184	2192	2200	clocks
Horizontal Display Period		Thd	-	1920	-	clocks

Note : The above is as optimized setting.

SPEC. NUMBER

SPEC. TITLE

PAGE

NV156FHM-N6A V8.1 Product Specification Rev. P0

20 OF 65

DAS-RD-2019008-O

A4(210 X 297)

**BOE**

PRODUCT GROUP

REV

ISSUE DATE

Customer Spec

P0

2020.09.01

**6.2 eDP Rx Interface Timing Parameter**

The specification of the eDP Rx interface timing parameter is shown in Table 9.

&lt;Table 9. eDP Main-Link RX TP4 Package Pin Parameters&gt;

Item	Symbol	Min	Typ	Max	Unit	Remark
Spread spectrum clock (Link clock down-spreading)	ssc	0	-	0.5	%	
Differential peak-to-peak input voltage at package pins	VRX-DIFFp-p	100	-	1320	mV	
Rx input DC common mode voltage	VRX_DC_CM	0	-	2	V	
Differential termination resistance	RRX-DIFF	80	-	120	$\Omega$	
Single-ended termination resistance	RRX-SE	40	-	60	$\Omega$	
Rx short circuit current limit	IRX_SHORT	-	-	50	mA	
Intra-pair skew at Rx package pins (HBR) RX intra-pair skew tolerance at HBR	LRX_SKEW_ INTRA_PAIR	-	-	60	ps	
AC Coupling Capacitor	CSOURCE_ML	75		200	nF	Source side

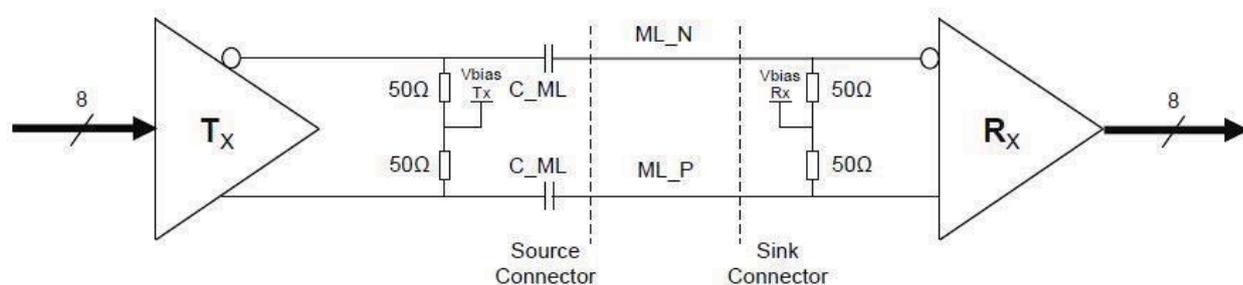


Figure 14. Main link differential pair

SPEC. NUMBER

SPEC. TITLE

PAGE

NV156FHM-N6A V8.1 Product Specification Rev. P0

21 OF 65

DAS-RD-2019008-O

A4(210 X 297)

**BOE**

PRODUCT GROUP

REV

ISSUE DATE

Customer Spec

P0

2020.09.01

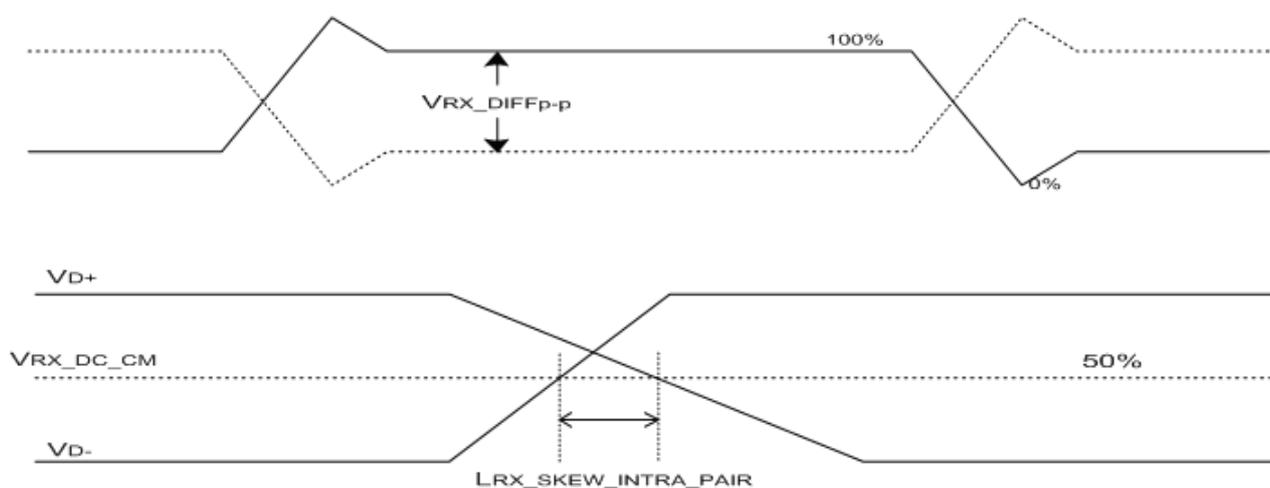


Figure 15. VRX-DIFFp-p &amp; LRX\_SKEW\_INTRA\_PAIR

SPEC. NUMBER

SPEC. TITLE

PAGE

NV156FHM-N6A V8.1 Product Specification Rev. P0

22 OF 65

DAS-RD-2019008-O

A4(210 X 297)

**BOE**

PRODUCT GROUP

REV

ISSUE DATE

Customer Spec

P0

2020.09.01

&lt;Table 10. HPD Characteristics&gt;

Item	Symbol	Min	Typ	Max	Unit	Remark
HPD voltage	V <sub>HPD</sub>	2.25	-	3.6	V	
Hot Plug Detection Threshold	-	2.0	-	-	V	Source side Detecting
Hot Unplug Detection Threshold	-	-	-	0.8V	V	
HPD_IRQ Pulse Width	HPD_IRQ	0.5	-	1	ms	
HPD_TimeOut	-	2.0	-	-	ms	

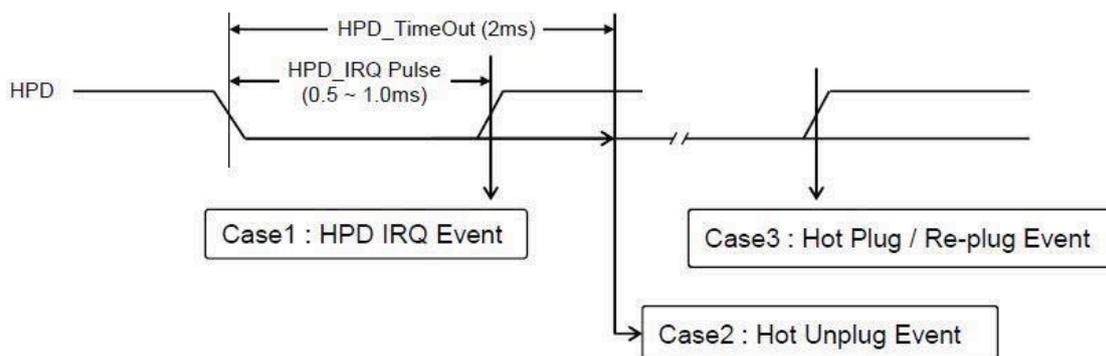


Figure 16. HPD Events

SPEC. NUMBER

SPEC. TITLE

PAGE

NV156FHM-N6A V8.1 Product Specification Rev. P0

23 OF 65

DAS-RD-2019008-O

A4(210 X 297)

**BOE**

PRODUCT GROUP

REV

ISSUE DATE

Customer Spec

P0

2020.09.01

&lt;Table 11. AUX Characteristics&gt;

Item	Symbol	Min	Typ	Max	Unit	Remark
AUX unit interval	UIAUX	0.4	0.5	0.6	Us	
AUX peak-to-peak input differential voltage	VAUX-RX-D IFFp-p	0.29	-	1.38	V	
AUX CH termination DC resistance	RAUX-TER M	80	100	120	Ohm	
AUX DC common mode voltage	VAUX-DC-C M	0	-	2	V	
AUX turn around common mode voltage	VAUX-TUR N-CM	-	-	0.3	V	
AUX short circuit current limit	IAUX-SHOR T	-	-	90	mA	
AUX AC Coupling Capacitor	CSOURCE-A UX	75	-	200	nf	Source side

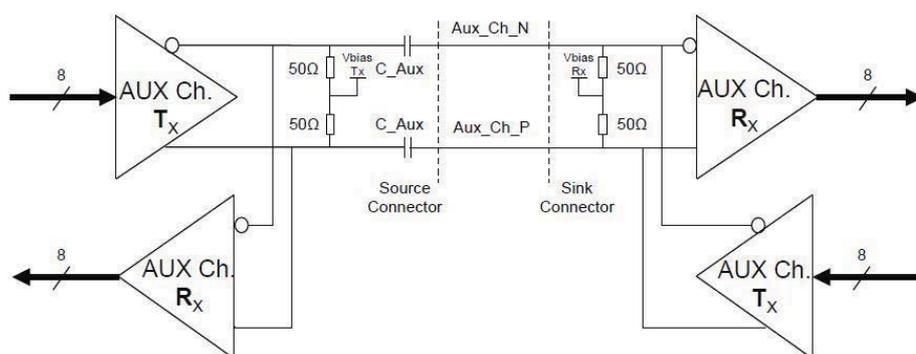


Figure 17. AUX differential pair

SPEC. NUMBER

SPEC. TITLE

PAGE

NV156FHM-N6A V8.1 Product Specification Rev. P0

24 OF 65

DAS-RD-2019008-O

A4(210 X 297)

**BOE**

PRODUCT GROUP

REV

ISSUE DATE

Customer Spec

P0

2020.09.01

**7.0 INPUT SIGNALS, BASIC DISPLAY COLORS & GRAY SCALE OF COLORS**

&lt;Table 12. Input Signal &amp; Basic Display Colors &amp; Gray Scale of Colors &gt;

	Colors & Gray scale	Data signal																							
		R0	R1	R2	R3	R4	R5	R6	R7	G0	G1	G2	G3	G4	G5	G6	G7	B0	B1	B2	B3	B4	B5	B6	B7
Basic colors	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Blue	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1
	Green	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
	Light Blue	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
	Red	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Purple	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1
	Yellow	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
Gray scale of Red	White	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	
	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
	△	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
	Darker	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
	△				↑								↑								↑				
	▽				↓								↓								↓				
	Brighter	1	0	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
Gray scale of Green	▽	0	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
	Red	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
	△	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
	Darker	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	
	△				↑								↑								↑				
	▽				↓								↓								↓				
Gray scale of Blue	Brighter	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
	▽	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
	Green	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	
	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
	△	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	
	Darker	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	
	△				↑								↑								↑				
Gray scale of White& Black	▽				↓							↓								↓					
	Brighter	1	0	1	1	1	1	1	1	1	0	1	1	1	1	1	1	1	0	1	1	1	1	1	
	▽	0	1	1	1	1	1	1	1	0	1	1	1	1	1	1	1	0	1	1	1	1	1	1	
	Blue	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	
	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
	△	1	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	1	0	0	0	0	0	0	
	Darker	0	1	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	1	0	0	0	0	0	
White	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1		

SPEC. NUMBER

SPEC. TITLE

PAGE

NV156FHM-N6A V8.1 Product Specification Rev. P0

25 OF 65

DAS-RD-2019008-O

A4(210 X 297)

<b>BOE</b>	PRODUCT GROUP	REV	ISSUE DATE
	Customer Spec	P0	2020.09.01

### 8.0 POWER SEQUENCE

To prevent a latch-up or DC operation of the LCD module, the power on/off sequence shall be as shown in below.

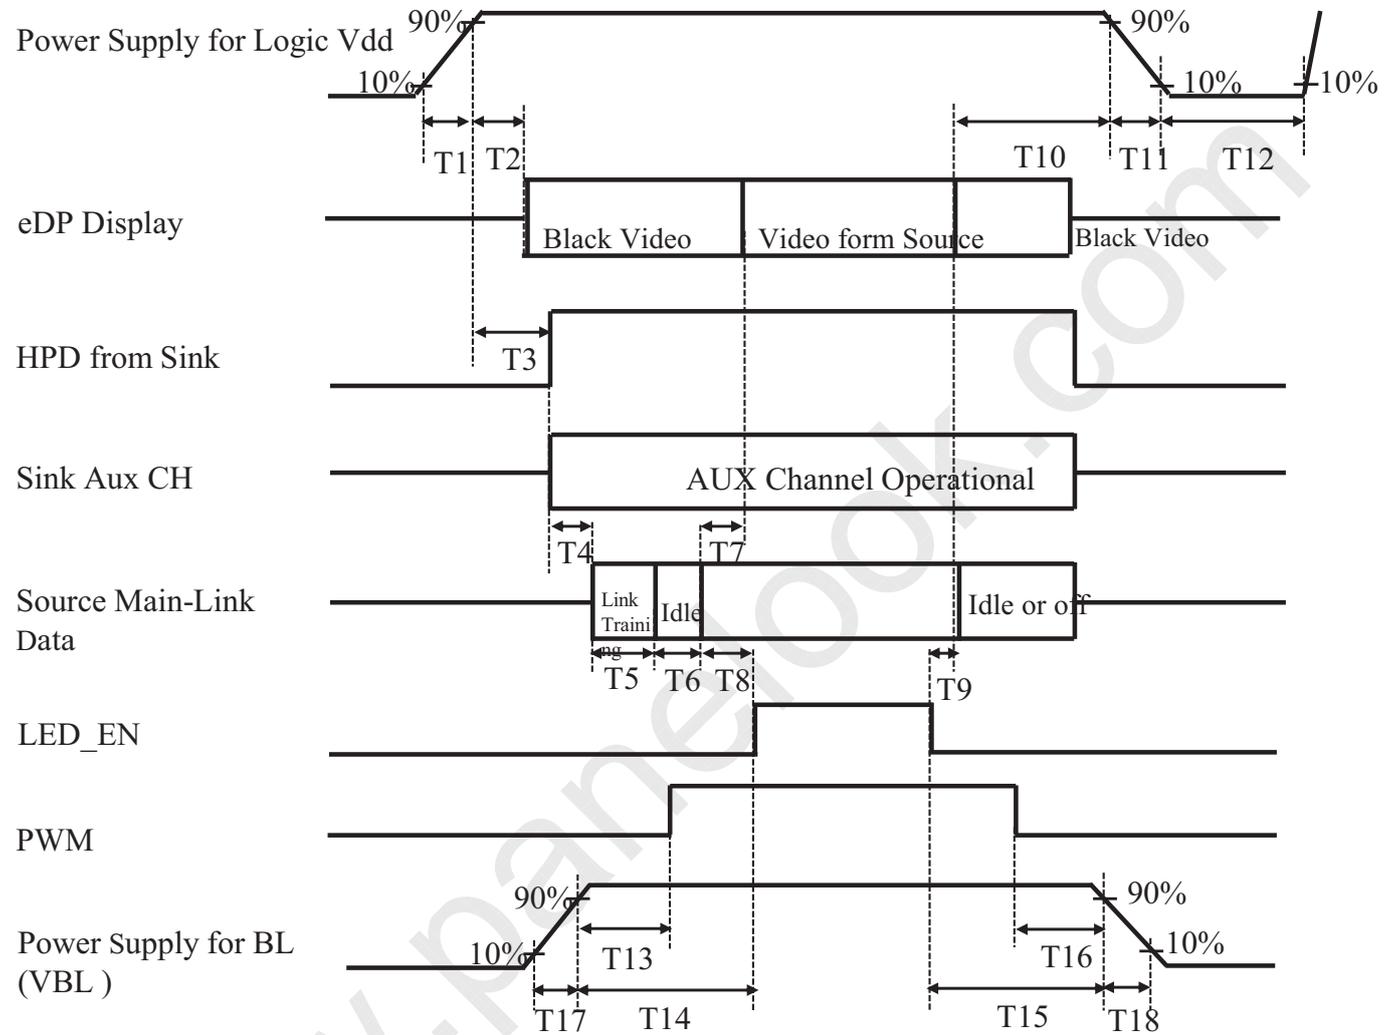


Figure 18. Power Sequence

- 0.5ms ≤ T1 ≤ 10 ms
- 0ms < T2 ≤ 200 ms
- 0ms < T3 ≤ 200 ms
- T4+T5+T6+T8>80ms
- 0ms < T7 ≤ 50ms
- 50ms < T8
- 0ms < T9
- 0ms < T10 < 500 ms
- 0.5ms ≤ T11 ≤ 10 ms
- 500ms ≤ T12
- 0ms < T13
- 0ms < T14
- 0ms < T15
- 0ms < T16
- 0.5ms ≤ T17
- 0.5ms ≤ T18

**Notes:**

- When the power supply VDD is 0V, keep the level of input signals on the low or keep high impedance.
- Do not keep the interface signal high impedance when power is on. Back Light must be turn on after power for logic and interface signal are valid.

SPEC. NUMBER	SPEC. TITLE	PAGE
DAS-RD-2019008-O	NV156FHM-N6A V8.1 Product Specification Rev. P0	26 OF 65

**BOE**

PRODUCT GROUP

REV


ISSUE DATE

Customer Spec

P0

2020.09.01

Power Supply for Logic Vdd

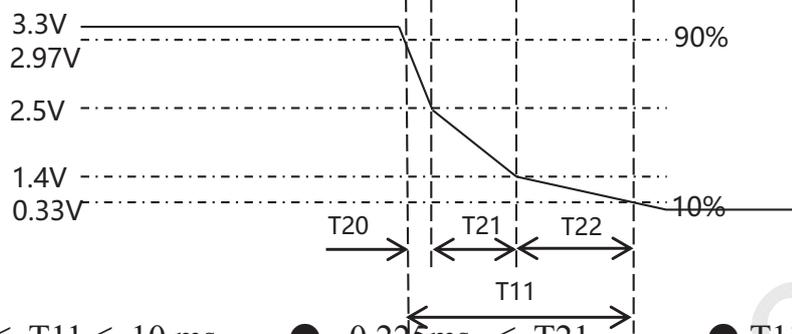

●  $0.5\text{ms} \leq T11 \leq 10\text{ms}$

●  $0.225\text{ms} \leq T21$

●  $T11 = T20 + T21 + T22$

Figure 19. T11 timing requirements

SPEC. NUMBER

SPEC. TITLE

PAGE

NV156FHM-N6A V8.1 Product Specification Rev. P0

27 OF 65

DAS-RD-2019008-O

A4(210 X 297)

**BOE**

PRODUCT GROUP

REV

ISSUE DATE

Customer Spec

P0

2020.09.01

## 9.0 Connector Description

Physical interface is described as for the connector on LCM.

These connectors are capable of accommodating the following signals and will be following components.

### 9.1 TFT LCD Module

< Table 13. Signal Connector >

Connector Name /Description	For Signal Connector
Manufacturer	STM
Type/ Part Number	MSAK24025P30
Mating Housing/ Part Number	I-PEX 20454-030T

SPEC. NUMBER

SPEC. TITLE

PAGE

NV156FHM-N6A V8.1 Product Specification Rev. P0

28 OF 65

DAS-RD-2019008-O

A4(210 X 297)

**BOE**

PRODUCT GROUP

REV

ISSUE DATE

Customer Spec

P0

2020.09.01

## 10.0 MECHANICAL CHARACTERISTICS

### 10.1 Dimensional Requirements

Figure 23 shows mechanical outlines for the model NV156FHM-N6A V8.1.  
Other parameters are shown in Table 14.

&lt;Table 14. Dimensional Parameters&gt;

Parameter	Specification	Unit
Active Area	344.16 (H) × 193.59 (V)	mm
Number of pixels	1920 (H) X 1080 (V) (1 pixel = R + G + B dots)	pixels
Pixel pitch	179.25 (H) X 179.25 (V)	um
Pixel arrangement	RGB Vertical stripe	
Display colors	16.2M(6bit+FRC)	
Display mode	Normally Black	
Dimensional outline	350.66±0.3 (H)*205.25±0.3(V)(W/O PCB)*2.6 (Max) 350.66±0.3(H)*214.75±0.5(V) (W/PCB)*2.6 (Max)	mm
Weight	280(max)	g

### 10.2 Mounting

See Figure 24.

### 10.3 Anti-Glare and Polarizer Hardness.

The surface of the LCD has an Anti-Glare coating to minimize reflection and a coating to reduce scratching.

### 10.4 Light Leakage

There shall not be visible light from the back-lighting system around the edges of the screen as seen from a distance 50cm from the screen with an overhead light level of 350lux.

SPEC. NUMBER

SPEC. TITLE

PAGE

NV156FHM-N6A V8.1 Product Specification Rev. P0

29 OF 65

DAS-RD-2019008-O

A4(210 X 297)

**BOE**

PRODUCT GROUP

REV

ISSUE DATE

Customer Spec

P0

2020.09.01

**11.0 RELIABILITY TEST**

The reliability test items and its conditions are shown in below.

&lt;Table 15. Reliability Test&gt;

No	Test Items	Conditions	Remark
1	High temperature storage test	Ta = 60°C , 60%RH, 240 hrs	
2	Low temperature storage test	Ta = -20°C , 240 hrs	
3	High temperature & high humidity operation test	Ta = 50°C , 80%RH, 240 hrs	
4	High temperature operation test	Ta = 50°C , 60%RH, 240 hrs	
5	Low temperature operation test	Ta = 0°C , 240 hrs	
6	Thermal shock	Ta = -20 °C ↔ 60 °C (0.5 hr), 60%±3%RH, 100 cycle	
7	Vibration test (non-operating)	Ta = 25°C , 60%RH, 1.5G, 10~500Hz, Sine X,Y,Z / Sweep rate : 1 hour	Note 1
8	Shock test (non-operating)	Ta = 25°C , 60%RH, 220G, Half Sine Wave 2msec±X,±Y,±Z Once for each direction	Note 1
9	Electro-static discharge test (operating)	Air : 150 pF, 330Ω, ±15 KV Contact : 150 pF, 330Ω, ±8 KV Ta = 25°C , 60%RH,	Note 2

Notes :

1. The fixture must be hard enough , so that the module would not be twisted or bent.
2. Self- recovery and restart recovery is allowed. No hardware failures.

SPEC. NUMBER

SPEC. TITLE

PAGE

NV156FHM-N6A V8.1 Product Specification Rev. P0

30 OF 65

DAS-RD-2019008-O

A4(210 X 297)

**BOE**

PRODUCT GROUP

REV

ISSUE DATE

Customer Spec

P0

2020.09.01

## 12.0 HANDLING & CAUTIONS

### (1) Cautions when taking out the module

- Pick the pouch only, when taking out module from a shipping package.

### (2) Cautions for handling the module

- As the electrostatic discharges may break the LCD module, handle the LCD module with care. Peel a protection sheet off from the LCD panel surface as slowly as possible.
- As the LCD panel and back - light element are made from fragile glass material, impulse and pressure to the LCD module should be avoided.
- As the surface of the polarizer is very soft and easily scratched, use a soft dry cloth without chemicals for cleaning.
- Do not pull the interface connector in or out while the LCD module is operating.
- Put the module display side down on a flat horizontal plane.
- Handle connectors and cables with care.

### (3) Cautions for the operation

- When the module is operating, do not lose CLK, ENAB signals. If any one of these signals is lost, the LCD panel would be damaged.
- Obey the supply voltage sequence. If wrong sequence is applied, the module would be damaged.

### (4) Cautions for the atmosphere

- Dew drop atmosphere should be avoided.
- Do not store and/or operate the LCD module in a high temperature and/or humidity atmosphere. Storage in an electro-conductive polymer packing pouch and under relatively low temperature atmosphere is recommended.

### (5) Cautions for the module characteristics

- Do not apply fixed pattern data signal to the LCD module at product aging.
- Applying fixed pattern for a long time may cause image sticking.

### (6) Other cautions

- Do not disassemble and/or re-assemble LCD module.
- Do not re-adjust variable resistor or switch etc.
- When returning the module for repair or etc. Please pack the module not to be broken. We recommend to use the original shipping packages.

SPEC. NUMBER

SPEC. TITLE

PAGE

NV156FHM-N6A V8.1 Product Specification Rev. P0

31 OF 65

DAS-RD-2019008-O

A4(210 X 297)

<b>BOE</b>	PRODUCT GROUP	REV	ISSUE DATE
	Customer Spec	P0	2020.09.01

### 13.0 LABEL

#### (1) Product Label

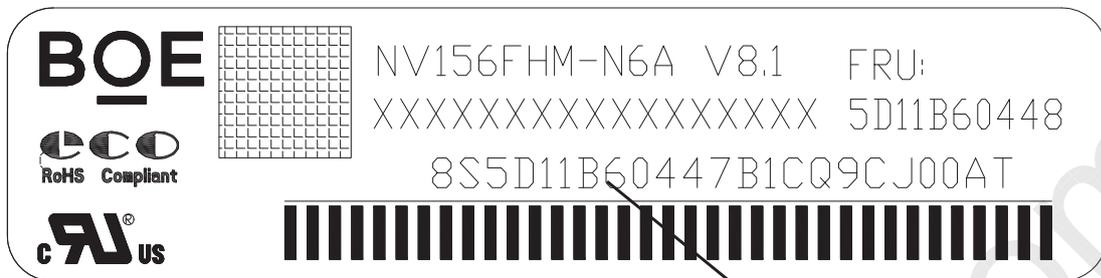


Figure 20. Product Label

Module ID Naming Rule:

<Table 16. Module ID Naming Rule>

Digit Code	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17
Code	B	9	A	F	1	7	8	8	D	3	1	0	0	0	0	6	8
Description	Product Name		Product Grade	B8	Year		Month	Model Extension Code (Last 4 Digits of FG CODE)				Serial No. 00001-ZZZZZZ					

SPEC. NUMBER	SPEC. TITLE	PAGE
DAS-RD-2019008-O	NV156FHM-N6A V8.1 Product Specification Rev. P0	32 OF 65

<b>BOE</b>	PRODUCT GROUP	REV	ISSUE DATE
	Customer Spec	P0	2020.09.01

(2) High voltage caution label

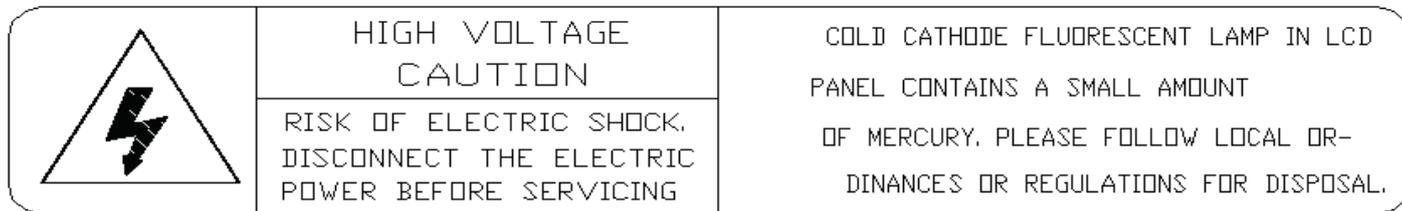


Figure 21. High Voltage Caution Label

(3) Box label



Figure 22. Box Label

Serial number marked part needs to print, show as follows:

1. FG-CODE(Before 12 bit)
2. Product quantity
3. Box ID
4. Date
5. The client section material number(The client)
6. FG-Code After four
7. The supplier code

Total Size:100×50mm

<Table 17. Box Label Naming Rule >

Digit Code	1	2	3	4	5	6	7	8	9	10	11	12	13
Code	B	9	A	F	1	7	8	N	0	0	3	2	7
Description	Product Name		Product Grade	B8	Year		Month	Revision	BOX Serial Number				


SPEC. NUMBER	SPEC. TITLE	PAGE
DAS-RD-2019008-O	NV156FHM-N6A V8.1 Product Specification Rev. P0	33 OF 65

A4(210 X 297)

	PRODUCT GROUP	REV	ISSUE DATE
	Customer Spec	P0	2020.09.01

## 14.0 PACKING INFORMATION

### 14.1 Packing Order

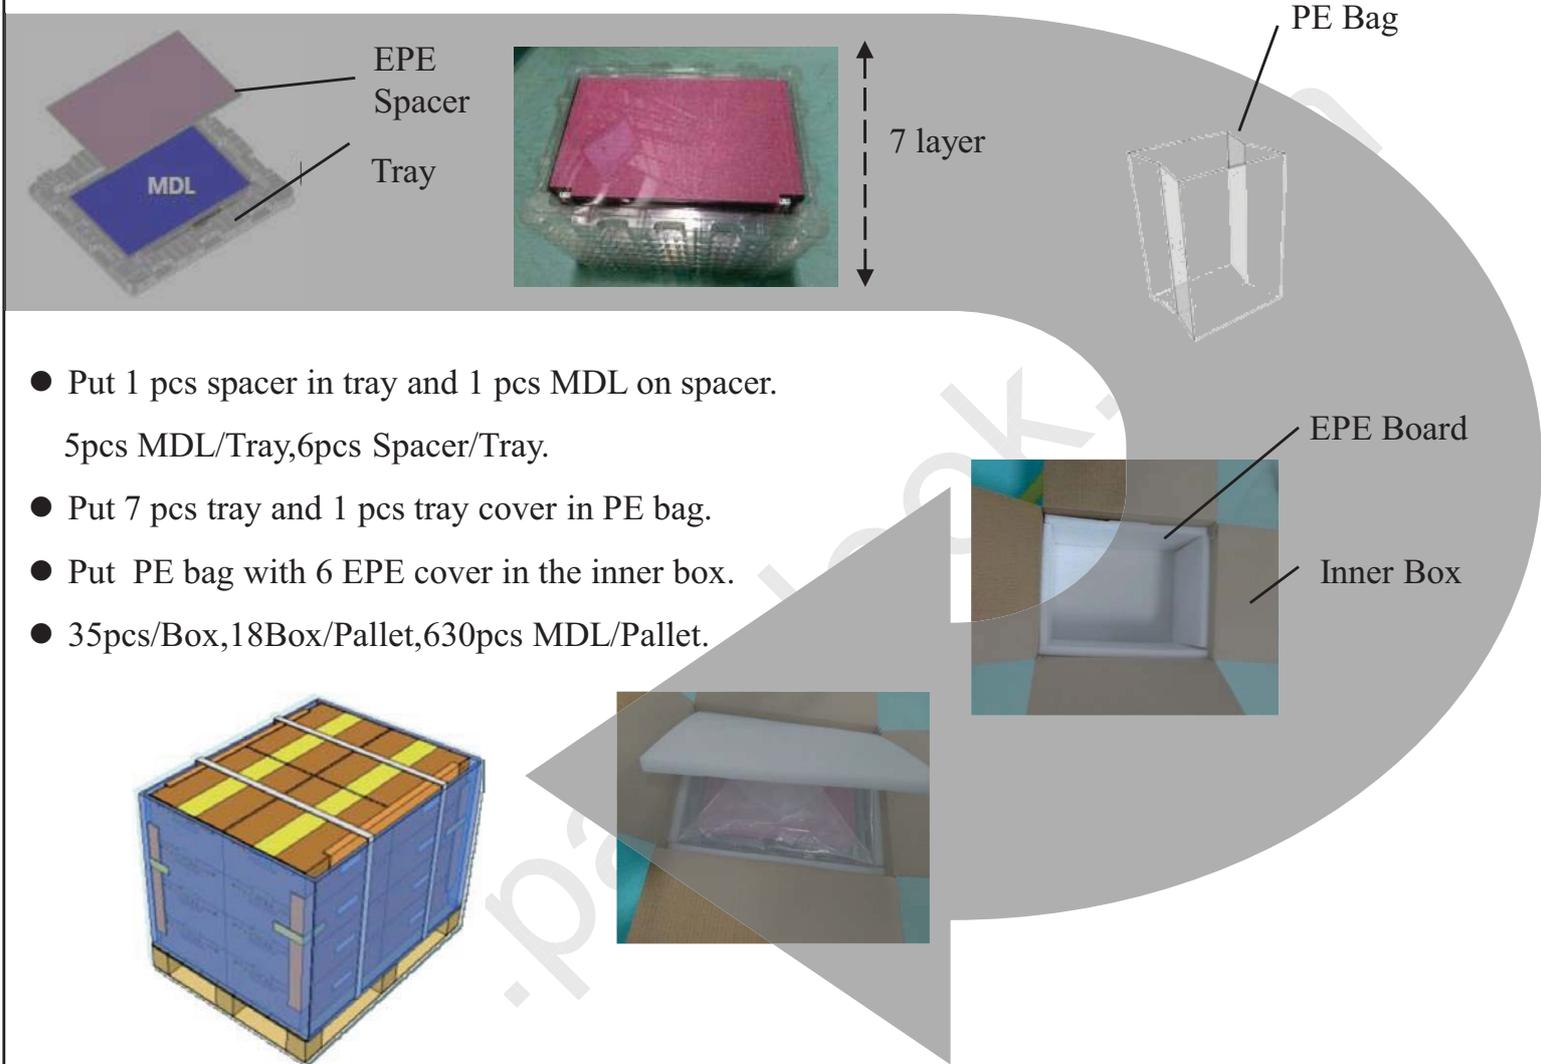

- Put 1 pcs spacer in tray and 1 pcs MDL on spacer.  
5pcs MDL/Tray,6pcs Spacer/Tray.
- Put 7 pcs tray and 1 pcs tray cover in PE bag.
- Put PE bag with 6 EPE cover in the inner box.
- 35pcs/Box,18Box/Pallet,630pcs MDL/Pallet.

Figure 23. Packing Order

### 14.2 Note

- Box dimension: 480mm\*350mm\*285mm
- Package quantity in one box: 35pcs
- Total weight: TBDkg/Box

SPEC. NUMBER	SPEC. TITLE	PAGE
DAS-RD-2019008-O	NV156FHM-N6A V8.1 Product Specification Rev. P0	34 OF 65



BOE

PRODUCT GROUP

REV

ISSUE DATE

Customer Spec

P0

2020.09.01

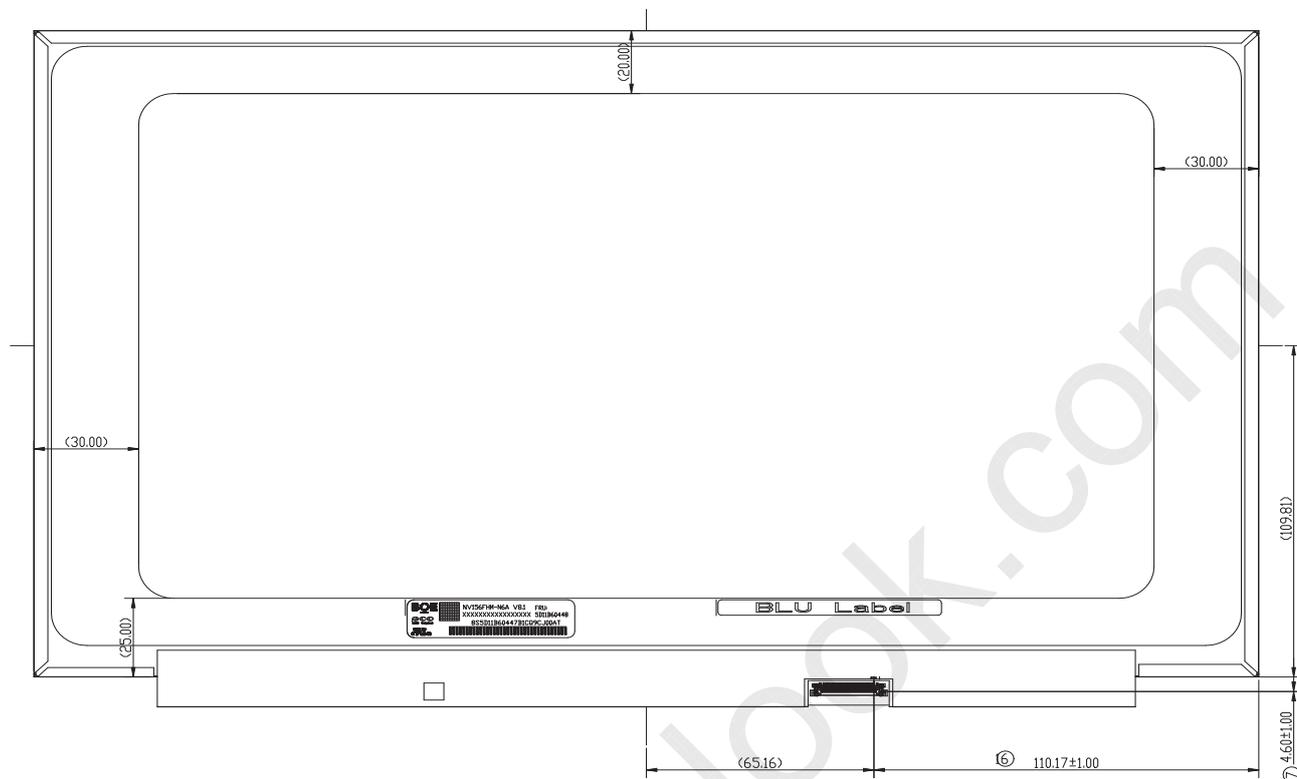


Figure 26. TFT-LCD Module Outline Dimensions (Rear view)

## Notes:

1. Warp and deformation Spec.: 0.5mm Max..
2. The eDP connector is measured at PIN 1 and mating line.
3. Unspecified tolerance refer to  $\pm 0.3$  mm.
4. Top polarizer is the highest portion.
5. Critical dimension: 1 ~ 17 CPK: 1 ~ 3
6. Do not have light leakage on four corners of module.
7. Measurement method refer to Appendix A
8. System matching refer to Appendix B
9. “()”marks the reference dimensions.
10. Cell tape and polarizer step tolerance is  $XXX \pm 0.026$ mm for L/R/U portion.

SPEC. NUMBER

SPEC. TITLE

PAGE

NV156FHM-N6A V8.1 Product Specification Rev. P0

36 OF 65

DAS-RD-2019008-O

A4(210 X 297)

**BOE**

PRODUCT GROUP

REV

ISSUE DATE

Customer Spec

P0

2020.09.01

**16.0 EDID Table**

Check		Address (HEX)	Function	Hex	Dec	crc	Input values.	Notes
FAE	QE							
-	-	00	Header	00	0		0	EDID Header
-	-	01		FF	255		255	
-	-	02		FF	255		255	
-	-	03		FF	255		255	
-	-	04		FF	255		255	
-	-	05		FF	255		255	
-	-	06		FF	255		255	
-	-	07		00	0		0	
V		08	ID Manufacturer Name	09	9		BOE	ID = BOE
V		09		E5	229			
	V	0A	ID Product Code	8E	142		2446	ID = 2446
	V	0B		09	9			
V		0C	32-bit serial No.	00	0		0	
V		0D		00	0		0	
V		0E		00	0		0	
V		0F		00	0		0	
V		10	Week of manufacture	01	1		1	
V		11	Year of Manufacture	1E	30		2020	Manufactured in 2020
V		12	EDID Structure Ver.	01	1		1	EDID Ver 1.0
V		13	EDID revision #	04	4		4	EDID Rev. 0.4
V	V	14	Video input definition	A5	165		-	Refer to right table
	V	15	Max H image size	22	34		34	34.4 cm (Approx)
	V	16	Max V image size	13	19		19	19.4 cm (Approx)
	V	17	Display Gamma	78	120		2.2	Gamma curve = 2.2
V		18	Feature support	03	3		-	Refer to right table
	V	19	Red/Green low bits	AA	170		-	Red / Green Low Bits
	V	1A	Blue/White low bits	25	37		-	Blue / White Low Bits
	V	1B	Red x high bits	A5	165	662	0.646	Red (x) = 10100101 (0.646)
	V	1C	Red y high bits	55	85	342	0.334	Red (y) = 01010101 (0.334)
	V	1D	Green x high bits	4D	77	310	0.303	Green (x) = 01001101 (0.303)
	V	1E	Green y high bits	9C	156	626	0.611	Green (y) = 10011100 (0.611)
	V	1F	Blue x high bits	27	39	156	0.152	Blue (x) = 00100111 (0.152)
	V	20	BLue y high bits	10	16	66	0.064	Blue (y) = 00010000 (0.064)
	V	21	White x high bits	50	80	321	0.313	White (x) = 01010000 (0.313)
	V	22	White y high bits	54	84	337	0.329	White (y) = 01010100 (0.329)
V		23	Established timing 1	00	0		-	Refer to right table
V		24	Established timing 2	00	0		-	
V		25	Established timing 3	00	0		-	

SPEC. NUMBER

SPEC. TITLE

PAGE

NV156FHM-N6A V8.1 Product Specification Rev. P0

37 OF 65

DAS-RD-2019008-O

A4(210 X 297)



PRODUCT GROUP

REV

ISSUE DATE

Customer Spec

P0

2020.09.01

V		26	Standard timing #1	01	1		Not Used
V		27		01	1		
V		28	Standard timing #2	01	1		Not Used
V		29		01	1		
V		2A	Standard timing #3	01	1		Not Used
V		2B		01	1		
V		2C	Standard timing #4	01	1		Not Used
V		2D		01	1		
V		2E	Standard timing #5	01	1		Not Used
V		2F		01	1		
V		30	Standard timing #6	01	1		Not Used
V		31		01	1		
V		32	Standard timing #7	01	1		Not Used
V		33		01	1		
V		34	Standard timing #8	01	1		Not Used
V		35		01	1		
	V	36	Detailed timing/monitor descriptor #1	99	153	152.6	152.5632MHz Main clock
	V	37		3B	59		
	V	38		80	128	1920	Hor Active = 1920
	V	39		10	16	272	Hor Blanking = 272
	V	3A		71	113	-	4 bits of Hor. Active + 4 bits of Hor. Blanking
	V	3B		38	56	1080	Ver Active = 1080
	V	3C		50	80	80	Ver Blanking = 80
	V	3D		40	64	-	4 bits of Ver. Active + 4 bits of Ver. Blanking
	V	3E		30	48	48	Hor Sync Offset = 48
	V	3F		20	32	32	H Sync Pulse Width = 32
	V	40		36	54	3	V sync Offset = 3 line
	V	41		00	0	6	V Sync Pulse width : 6 line
	V	42		58	88	344	Horizontal Image Size = 344 mm (Low 8 bits)
	V	43		C2	194	194	Vertical Image Size = 194 mm (Low 8 bits)
	V	44		10	16	-	4 bits of Hor Image Size + 4 bits of Ver Image Size
	V	45		00	0	0	Hor Border (pixels)
	V	46		00	0	0	Vertical Border (Lines)
	V	47	1A	26	-	Refer to right table	

SPEC. NUMBER

SPEC. TITLE

PAGE

NV156FHM-N6A V8.1 Product Specification Rev. P0

38 OF 65

DAS-RD-2019008-O

A4(210 X 297)



PRODUCT GROUP

REV

ISSUE DATE

Customer Spec

P0

2020.09.01

V		48	Detailed timing/monitor descriptor #2	00	0	0	0MHz Main clock	
V		49		00	0		0	Hor Active = 0
V		4A		00	0		0	Hor Blanking = 0
V		4B		00	0		0	4 bits of Hor. Active + 4 bits of Hor. Blanking
V		4C		00	0		-	Ver Active = 0
V		4D		00	0		0	Ver Blanking = 0
V		4E		00	0		0	4 bits of Ver. Active + 4 bits of Ver. Blanking
V		4F		00	0		-	Hor Sync Offset = 0
V		50		00	0		0	H Sync Pulse Width = 0
V		51		00	0		0	V sync Offset = 0 line
V		52		00	0		0	V Sync Pulse width : 0 line
V		53		00	0		0	Horizontal Image Size = 0 mm (Low 8 bits)
V		54		00	0		0	Vertical Image Size = 0 mm (Low 8 bits)
V		55		00	0		-	4 bits of Hor Image Size + 4 bits of Ver Image Size
V		56		00	0		0	Hor Border (pixels)
V		57		00	0		0	Vertical Border (Lines)
V		58		00	0		-	Refer to right above table
V		59		00	0			Indicates descriptor #3 is a display Descriptor
V		5A		00	0			Reserved
V		5B	00	0			Tag: ASCII String	
V		5C	FE	254			Reserved	
V		5D	00	0			Manufacture name : BOECQ	
V		5E	42	66		B		
V		5F	4F	79		O		
V		60	45	69		E		
V		61	20	32				
V		62	43	67		C		
V		63	51	81		Q		
V		64	0A	10				
V		65	20	32				
V		66	20	32				
V		67	20	32				
V		68	20	32				
V		69	20	32				
V		6A	20	32				
V		6B	20	32				
V		6C						

SPEC. NUMBER

SPEC. TITLE

PAGE

NV156FHM-N6A V8.1 Product Specification Rev. P0

39 OF 65

DAS-RD-2019008-O

A4(210 X 297)



PRODUCT GROUP

REV

ISSUE DATE

Customer Spec

P0

2020.09.01

V		6C	Detailed timing/monitor descriptor #4	00	0			Indicates descriptor #4 is a display Descriptor	
V		6D		00	0				
V		6E		00	0				Reserved
V		6F		FE	254			Tag: ASCII String	
V		70		00	0			Reserved	
V		71		4E	78		N	Model name : NV156FHM-N6A	
V		72		56	86		V		
V		73		31	49		1		
V		74		35	53		5		
V		75		36	54		6		
V		76		46	70		F		
V		77		48	72		H		
V		78		4D	77		M		
V		79		2D	45		-		
V		7A		4E	78		N		
V		7B		36	54		6		
V		7C		41	65		A		
V		7D	0A	10					
V	V	7E	Extension flag	00	0	1	0 : 1個EDID; N-1: N個EDID		
-	-	7F	Checksum	9D	157	157	-		

SPEC. NUMBER

SPEC. TITLE

PAGE

NV156FHM-N6A V8.1 Product Specification Rev. P0

40 OF 65

DAS-RD-2019008-O

A4(210 X 297)

**BOE**

PRODUCT GROUP

REV

ISSUE DATE

Customer Spec

P0

2020.09.01

## 17.0 GENERAL PRECAUTIONS

### 17.1 HANDLING

(1) When the module is assembled, It should be attached to the system firmly using every mounting holes.

Be careful not to twist or bend the modules.

(2) Refrain from strong mechanical shock or any force to the module. Otherwise, it may cause improper operation or damage to the module.

(3) Note that polarizers are very fragile and could be easily damaged. Do not press or scratch the surface harder than 1 HB pencil lead.

(4) Wipe off water droplets or oil immediately. If you leave the droplets for a long time, Staining and discoloration may occur.

(5) If the surface of the polarizer is dirty, clean it using some absorbent cotton or soft cloth.

(6) The desirable cleaners are water, IPA (Isopropyl Alcohol) or Hexane. Do not use Ketone type materials(ex. Acetone), Ethyl alcohol, Toluene, Ethyl acid or Methyl chloride. It might permanently damage to the polarizer due to chemical reaction.

(7) If the liquid crystal material leaks from the panel, it should be kept away from the eyes or mouth .In case of contact with hands, legs or clothes, it must be washed away thoroughly with soap.

(8) Protect the module from static , it may cause damage to the module.

(9) Use fingerstalls with soft gloves to keep display clean during the incoming inspection and assembly process.

(10) Do not disassemble the module.

(11) Do not pull or fold the LED FPC.

(12) Do not touch any component which is located on the back side.

(13) Protection film for polarizer on the module shall be slowly peeled off just before use so that the electrostatic charge can be minimized.

(14) Pins of connector shall not be touched directly with bare hands.

### 17.2 STORAGE

(1) Do not leave the module in high temperature, and high humidity for a long time. It is highly recommended to store the module with temperature from 0 to 35°C and relative humidity of less than 70%.

(2) Do not store the TFT-LCD module in direct sunlight.

(3) The module shall be stored in a dark place. It is prohibited to apply sunlight or fluorescent light during the store.

SPEC. NUMBER

SPEC. TITLE

PAGE

NV156FHM-N6A V8.1 Product Specification Rev. P0

41 OF 65

DAS-RD-2019008-O

A4(210 X 297)

**BOE**

PRODUCT GROUP

REV

ISSUE DATE

Customer Spec

P0

2020.09.01

**17.3 OPERATION**

- (1) Do not connect, disconnect the module in the “ Power On” condition.
- (2) Power supply should always be turned on/off by following item 8.0 “ Power on/off sequence “.
- (3) Module has high frequency circuits. Sufficient suppression to the electromagnetic interference shall be done by system manufacturers. Grounding and shielding methods may be important to minimize the interference.
- (4) The standard limited warranty is only applicable when the module is used for general notebook applications. If used for purposes other than as specified, BOE is not to be held reliable for the defective operations. It is strongly recommended to contact BOE to find out fitness for a particular purpose.

**17.4 OTHERS**

- (1) Avoid condensation of water. It may result in improper operation or disconnection of electrode.
- (2) Do not exceed the absolute maximum rating value. ( the supply voltage variation, input voltage variation, Variation in part contents and environmental temperature, so on) Otherwise the module may be damaged.
- (3) If the module displays the same pattern continuously for a long period of time, it can be the situation when The “ image sticks” to the screen.
- (4) This module has its circuitry PCB's on the rear or bottom side and should be handled carefully to avoid being stressed.

SPEC. NUMBER

SPEC. TITLE

PAGE

NV156FHM-N6A V8.1 Product Specification Rev. P0

42 OF 65

DAS-RD-2019008-O

A4(210 X 297)

**BOE**

PRODUCT GROUP

REV

ISSUE DATE

Customer Spec

P0

2020.09.01

## Appendix A

The Measurement Methods for the Dimensions of Module

Caliper:

- a. Length of Outline
- b. Width of Outline (Without PCB)
- c. Thickness of Outline (Without/ With PCB)

Coordinate Measuring Machine:

CF Polarizer Size

Active Area Size

Active Area to Outline (Without Tape Wrinkle or Bulged)

Active Area to CF Polarizer

The Distance of Bracket Holes

P-Cover to Outline (Without Tape Wrinkle or Bulged)

Length of P-Cover

Connector Pin 1 to Outline (Without Tape Wrinkle or Bulged)

Height Gauge: The Different Height of Root and Top on the Bracket  
(Need to Calculate From Bracket Angle Spec.)

Feeler Gauge: The Warpage Spec. of Module

Notes:

Except the Critical Dimensions as Above, Other Dimensions are Measured by Coordinate Measuring Machine If Necessary.

SPEC. NUMBER

SPEC. TITLE

PAGE

NV156FHM-N6A V8.1 Product Specification Rev. P0

43 OF 65

DAS-RD-2019008-O

A4(210 X 297)

**BOE**

PRODUCT GROUP

REV

ISSUE DATE



Customer Spec

P0

2020.09.01

Appendix B

**LCM to A-Cover / sponges z-gap**

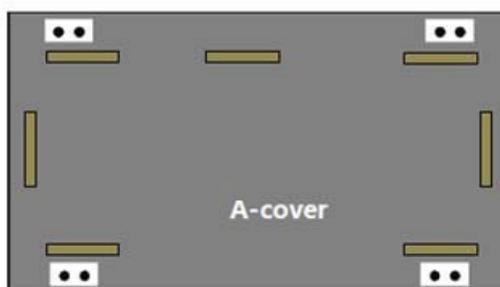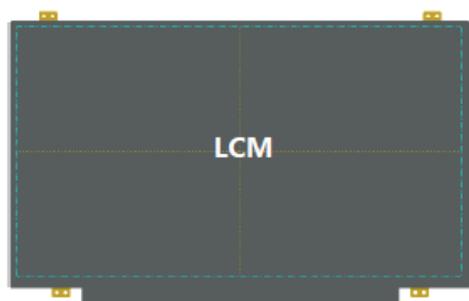

	Plastic Cover (LCM Thickness: Max)	Metal Cover (LCM Thickness: Max)
A	>0mm	>0mm
B	Min: 1.0mm	Min: 0.8mm
Without the open area of back cover		

Purpose

The reflector area is very sensitive, we suggest that design enough z-gap to decrease the risk of water ripple, white spot and other abnormal display

SPEC. NUMBER

SPEC. TITLE

PAGE

NV156FHM-N6A V8.1 Product Specification Rev. P0

44 OF 65

DAS-RD-2019008-O

A4(210 X 297)

**BOE**

PRODUCT GROUP

REV

ISSUE DATE


Customer Spec

P0

2020.09.01

Appendix B

**LCM to A-Cover / sponges z-gap**

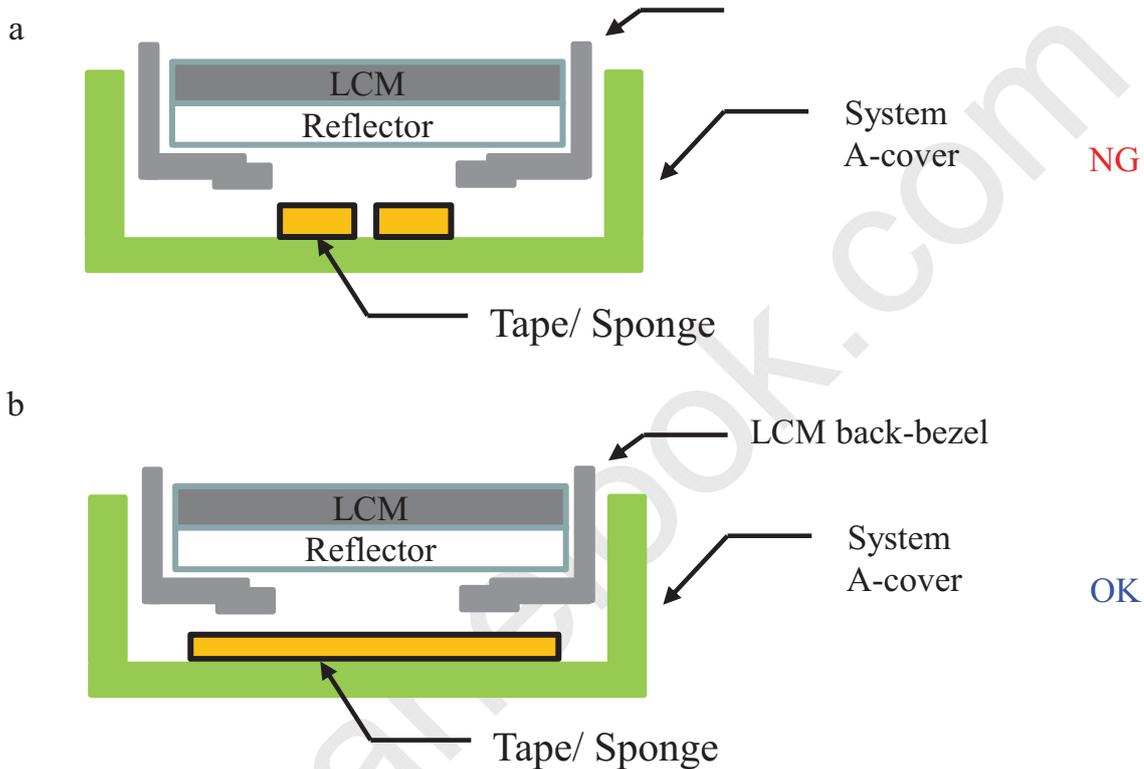

Purpose

If attach sponges or rubbers which correspond to white reflector area, it may cause white spot, pooling or other relate issues. We suggest that attach wide range sponges / rubbers which can cover the LCM back-bezel opening

SPEC. NUMBER

SPEC. TITLE

PAGE

NV156FHM-N6A V8.1 Product Specification Rev. P0

45 OF 65

DAS-RD-2019008-O

A4(210 X 297)

**BOE**

PRODUCT GROUP

REV


ISSUE DATE

Customer Spec

P0

2020.09.01

## Appendix B

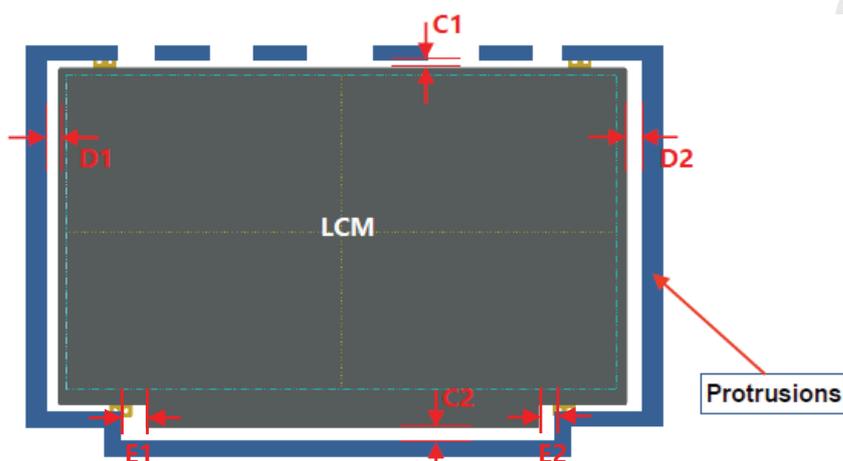**LCM to side wall / protrusions**

	Normal border	Narrow border
D1/D2	Min: 0.45mm	Min: 0.35mm
C1	Min: 0.50mm	
C2	Min: 0.50mm	
E1/E2	Min: 0.55mm	

## Purpose

We suggest that design enough gap around LCM to prevent shock test failure, or interference, cell crack, abnormal display...etc. in the reliability test

SPEC. NUMBER

SPEC. TITLE

PAGE

NV156FHM-N6A V8.1 Product Specification Rev. P0

46 OF 65

DAS-RD-2019008-O

A4(210 X 297)

**BOE**

PRODUCT GROUP

REV

ISSUE DATE

Customer Spec

P0

2020.09.01

## Appendix B

**LCM to B-cover z-gap**

B-cover Tape	Gap
Without	0.15 ~ 0.25mm
With	0.15 ~ 0.20mm

Purpose

Too less z-gap between system B-cover and LCM top pol has high risk to cause cell crack, pooling, light leakage and other issues

SPEC. NUMBER

SPEC. TITLE

PAGE

NV156FHM-N6A V8.1 Product Specification Rev. P0

47 OF 65

DAS-RD-2019008-O

A4(210 X 297)

**BOE**

PRODUCT GROUP

REV


ISSUE DATE

Customer Spec

P0

2020.09.01

## Appendix B

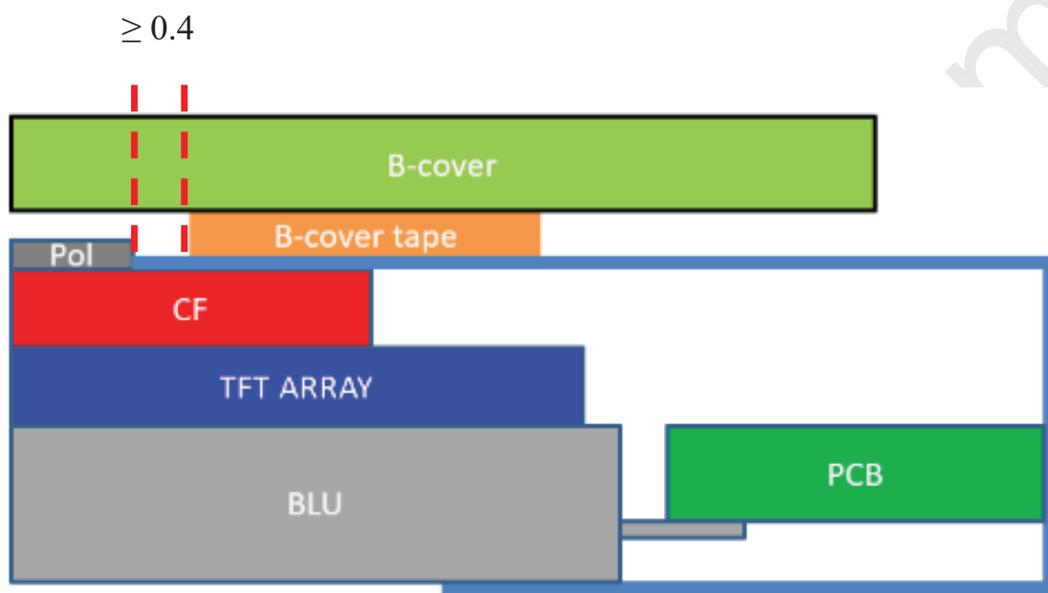**B-cover tape to top pol edge**

If attach b-cover and LCM with tapes,  
Please let tapes to be located out of top pol edges 0.4mm away on 4 sides

Purpose

To avoid the B-cover tape override top pol and cause pooling or light leakage issue

SPEC. NUMBER

SPEC. TITLE

PAGE

NV156FHM-N6A V8.1 Product Specification Rev. P0

48 OF 65



DAS-RD-2019008-O

A4(210 X 297)

	PRODUCT GROUP	REV	ISSUE DATE
	Customer Spec	P0	2020.09.01

Appendix B

**Antenna Cable & Webcam wire**

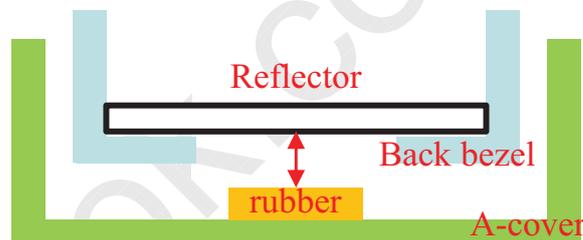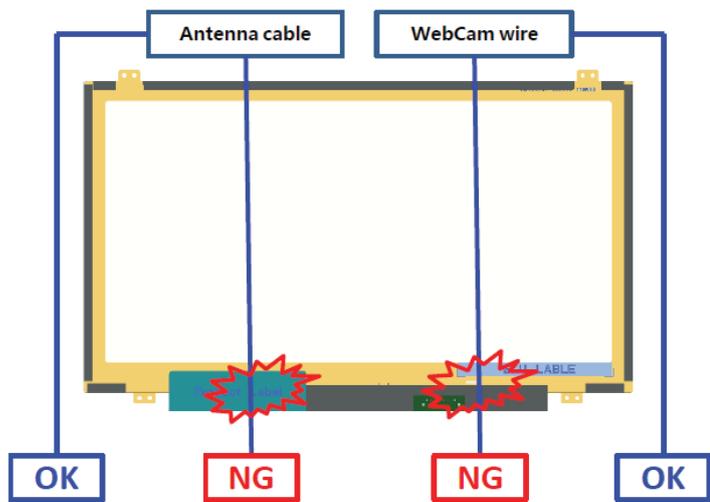

If sponge within the reflector area is necessary, we suggest that the gap between reflector and sponge is more than 0.5mm



<b>Purpose</b>	<ol style="list-style-type: none"> <li>1. We suggest that do not set Antenna or WebCam cable / wire go behind LCM to avoid backpack test, hinge test ,twist test or pogo test with abnormal display</li> <li>2. If the cable / wire is necessary to go behind LCM, please make a groove with rounds or chamfers to protect the cable / wire, or attach with higher sponge / rubbers adjacent to the cable / wire route</li> <li>3. Suggest that attach the cable / wire with tapes to A-cover</li> <li>4. Do not attach anything with LCM reflector area. If attach cable / wire with LCM reflector area, it may cause pooling, white spot, light leakage and other related issues</li> </ol>
----------------	---

SPEC. NUMBER	SPEC. TITLE	PAGE
DAS-RD-2019008-O	NV156FHM-N6A V8.1 Product Specification Rev. P0	49 OF 65

	PRODUCT GROUP	REV	ISSUE DATE
	Customer Spec	P0	2020.09.01

Appendix B

**LCM paste area**

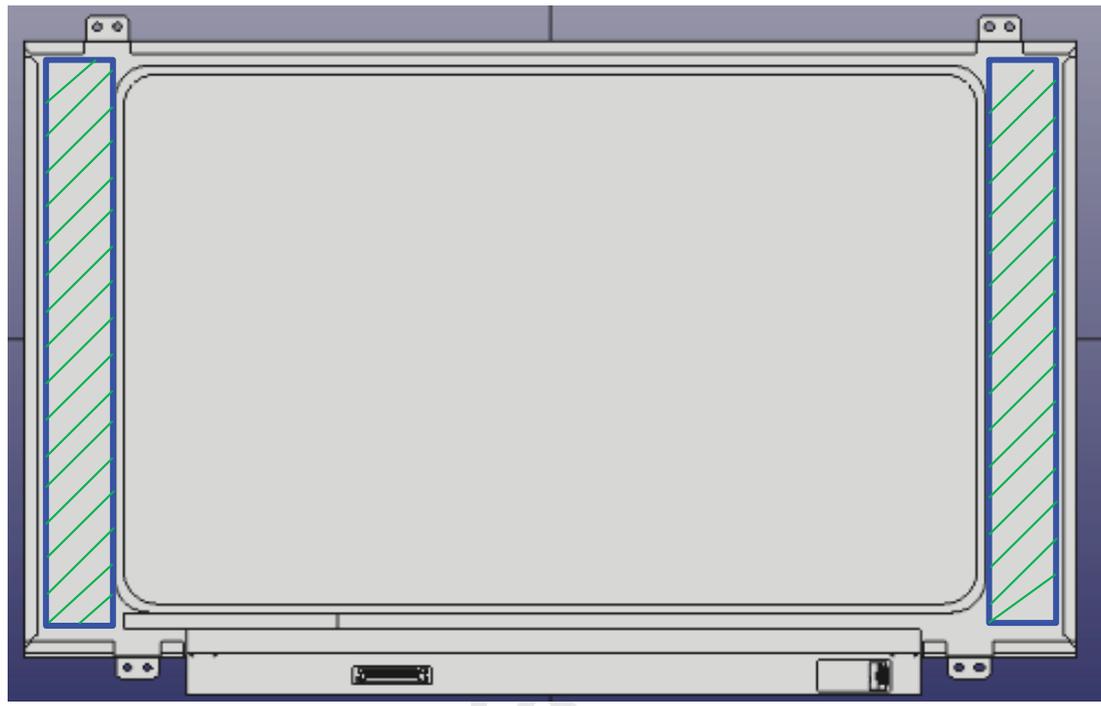

Attachment area

<b>Purpose</b>	If use the stretch remove tapes to fix LCM with A-cover, please set the stretch remove tapes correspond to the LCM back-bezel and do not let the tapes override the back-bezel's level step of opening
----------------	--

SPEC. NUMBER	SPEC. TITLE	PAGE
DAS-RD-2019008-O	NV156FHM-N6A V8.1 Product Specification Rev. P0	50 OF 65

A4(210 X 297)

**BOE**

PRODUCT GROUP

REV



ISSUE DATE

Customer Spec

P0

2020.09.01

## Appendix B

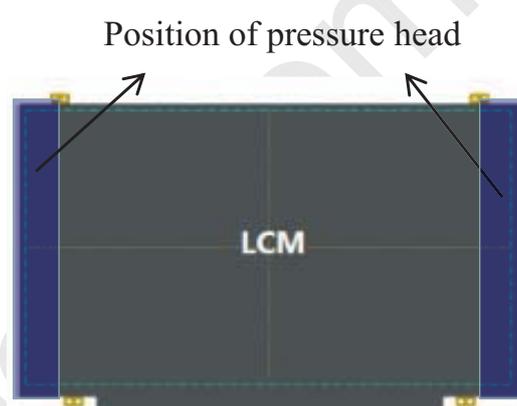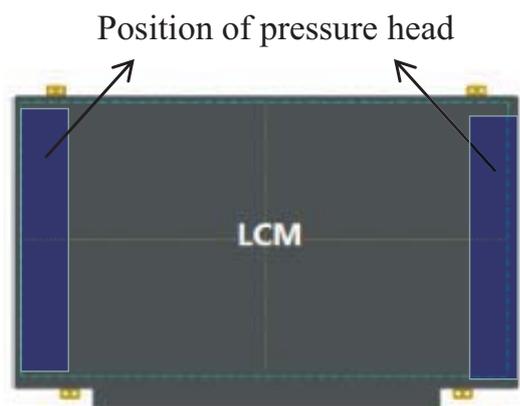**LCM pressable area****Purpose**

1. LCM is fixed on A-cover by double-sided tap which can stick LCM after using the press jig stress LCM during assembling.
2. To avoid panel broken the design of pressure head of press jig can not only pin on cell panel. The pressure head needs to pin on the LCM frame, which the LCM frame can share the pressure of the pressing head.

SPEC. NUMBER

SPEC. TITLE

PAGE

NV156FHM-N6A V8.1 Product Specification Rev. P0

51 OF 65


DAS-RD-2019008-O

A4(210 X 297)

	PRODUCT GROUP	REV	ISSUE DATE
	Customer Spec	P0	2020.09.01

Appendix B

**Wire setting**

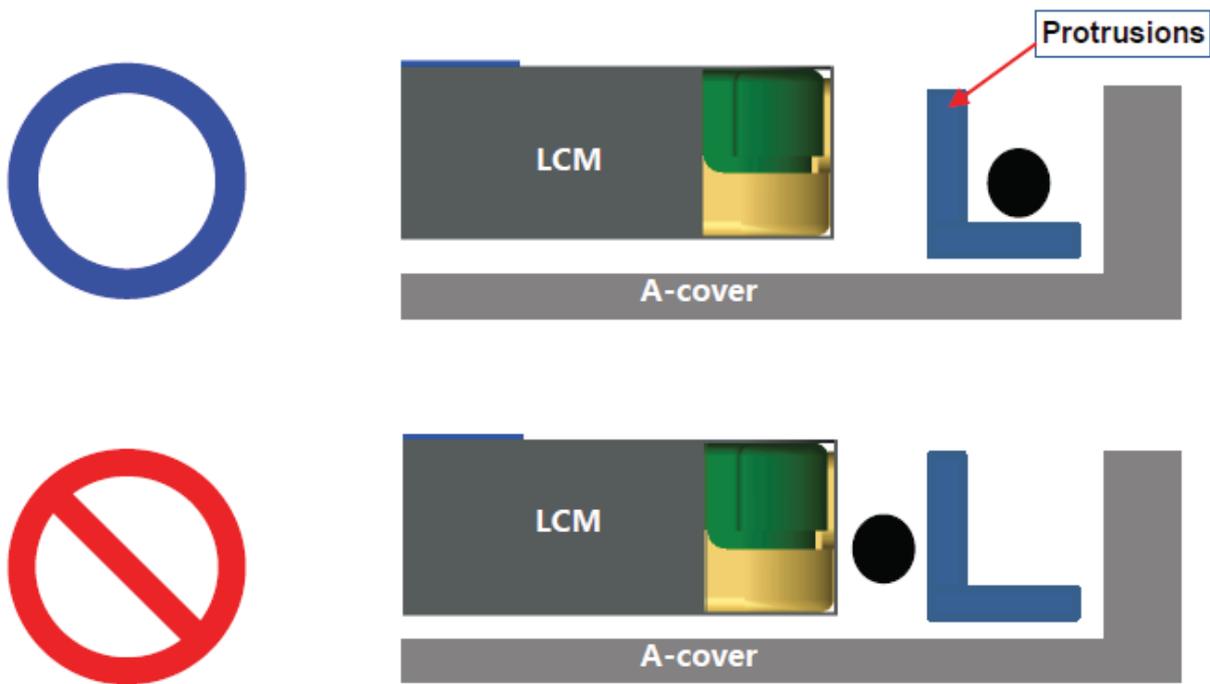

Purpose	Wire should be placed between Protrusions and A-cover. If place the wire between LCM and Protrusions, it may interfere with LCM when assembling B-covers, or even cause LCM breakage in reliability test.
---------	---

www.panelook.com


SPEC. NUMBER	SPEC. TITLE	PAGE
DAS-RD-2019008-O	NV156FHM-N6A V8.1 Product Specification Rev. P0	52 OF 65

A4(210 X 297)

	PRODUCT GROUP	REV	ISSUE DATE
	Customer Spec	P0	2020.09.01

Appendix B

**A-cover strength**

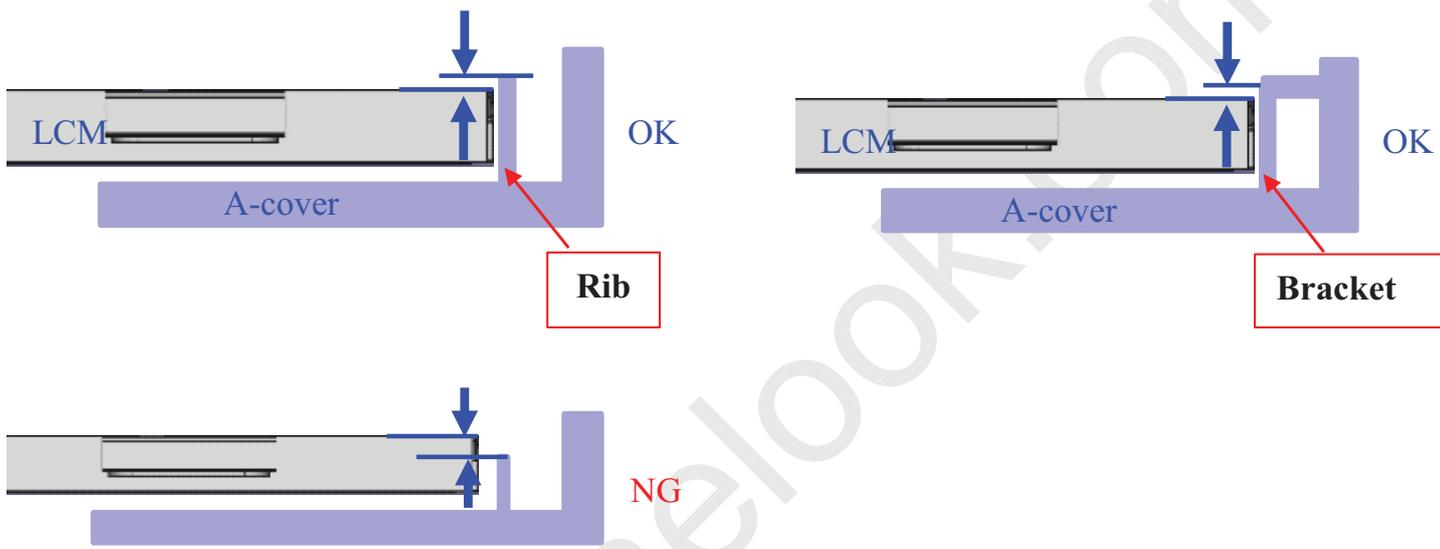

Purpose	<ol style="list-style-type: none"> <li>It is recommended that Rib height is higher than LCM, in order to avoiding press on LCM edge panels.</li> <li>As for LCM is more stronger than Rib, the L Bracket is be recommended.</li> </ol>
---------	--


SPEC. NUMBER	SPEC. TITLE	PAGE
DAS-RD-2019008-O	NV156FHM-N6A V8.1 Product Specification Rev. P0	53 OF 65

A4(210 X 297)

	PRODUCT GROUP	REV	ISSUE DATE
	Customer Spec	P0	2020.09.01

Appendix B

**System A-cover Inner Surface**

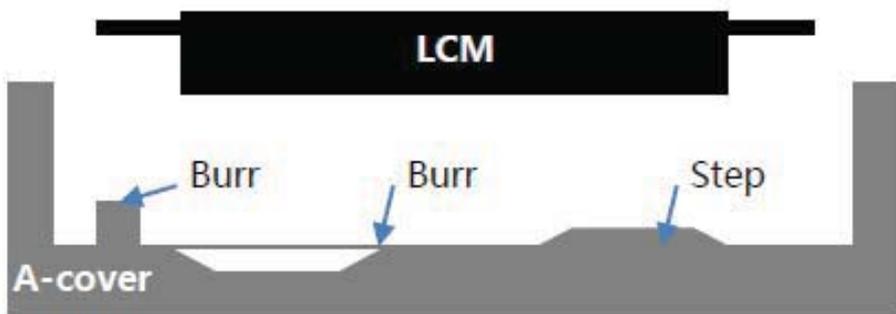



Purpose	There should not exist any burr, segment gap or protrusions beside Logo, which would cause White Spot or Glass Broken by stress concentration.
---------	--

SPEC. NUMBER	SPEC. TITLE	PAGE
DAS-RD-2019008-O	NV156FHM-N6A V8.1 Product Specification Rev. P0	54 OF 65

<h1>BOE</h1>	PRODUCT GROUP	REV	ISSUE DATE
	Customer Spec	P0	2020.09.01

Appendix B

**Keyboard area & Mouse pad**

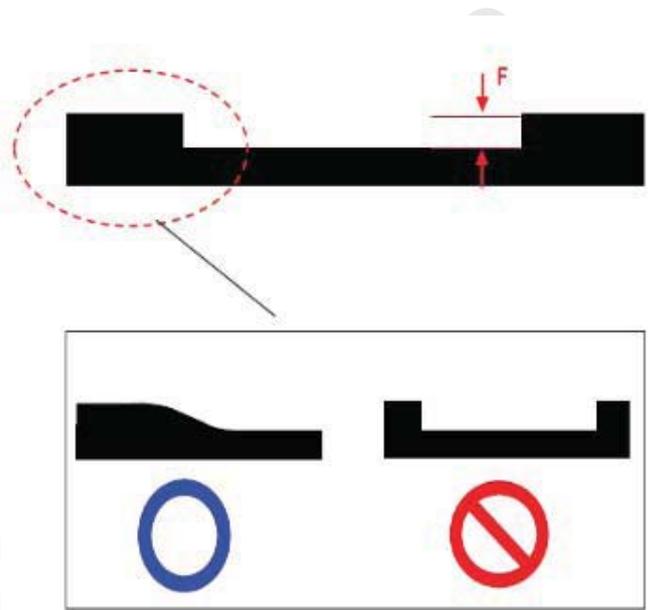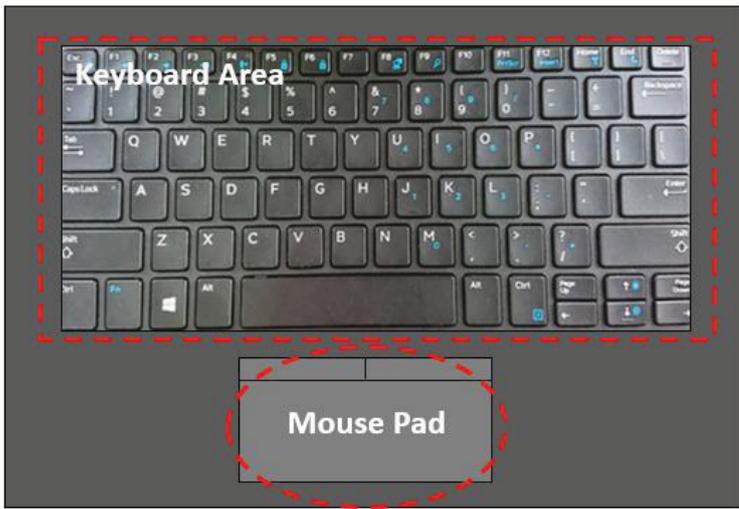

➤ F: max 0.3mm

<b>Purpose</b>	In order to avoiding LCM fragments in reliability test, the step surface of Keyboard and Mouse pad transmits smoothly, and should not be right-angle. For example, when Pogo testing, if the broken hole is done in this location, it is easy to produce fragments.
----------------	---

SPEC. NUMBER	SPEC. TITLE	PAGE
DAS-RD-2019008-O	NV156FHM-N6A V8.1 Product Specification Rev. P0	55 OF 65

A4(210 X 297)

**BOE**

PRODUCT GROUP

REV

ISSUE DATE


Customer Spec

P0

2020.09.01

Appendix B

**System cover reliability**



Purpose

The permanent deformation part of System cover after the reliability test, including sponge and other structures or components, can not touch LCM.

SPEC. NUMBER

SPEC. TITLE

PAGE

NV156FHM-N6A V8.1 Product Specification Rev. P0

56 OF 65

DAS-RD-2019008-O

A4(210 X 297)

**BOE**

PRODUCT GROUP

REV


ISSUE DATE

Customer Spec

P0

2020.09.01

## Appendix B

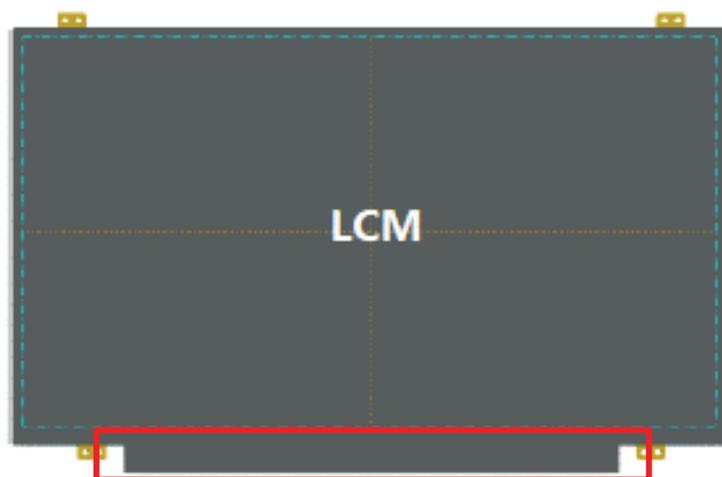**A/B-cover near LCD PCBA**

No magnetic object

## Purpose

There should not have magnet object near LCM PCBA, which is prone to cause physical or electricity noise issue

SPEC. NUMBER

SPEC. TITLE

PAGE

NV156FHM-N6A V8.1 Product Specification Rev. P0

57 OF 65

DAS-RD-2019008-O

A4(210 X 297)

**BOE**

PRODUCT GROUP

REV

ISSUE DATE

Customer Spec

P0

2020.09.01

## Appendix B

**A-cover add sponges on Boss side wall**

## Purpose

We suggest to attach Sponges to the side of the Boss column of A-cover to reduce the panel broken possibility in assembly. It is recommended to this design synchronously.

SPEC. NUMBER

SPEC. TITLE

PAGE

NV156FHM-N6A V8.1 Product Specification Rev. P0

58 OF 65


DAS-RD-2019008-O

A4(210 X 297)

	PRODUCT GROUP	REV	ISSUE DATE
	Customer Spec	P0	2020.09.01

Appendix B

**LCM to A-Cover / sponges z-gap**

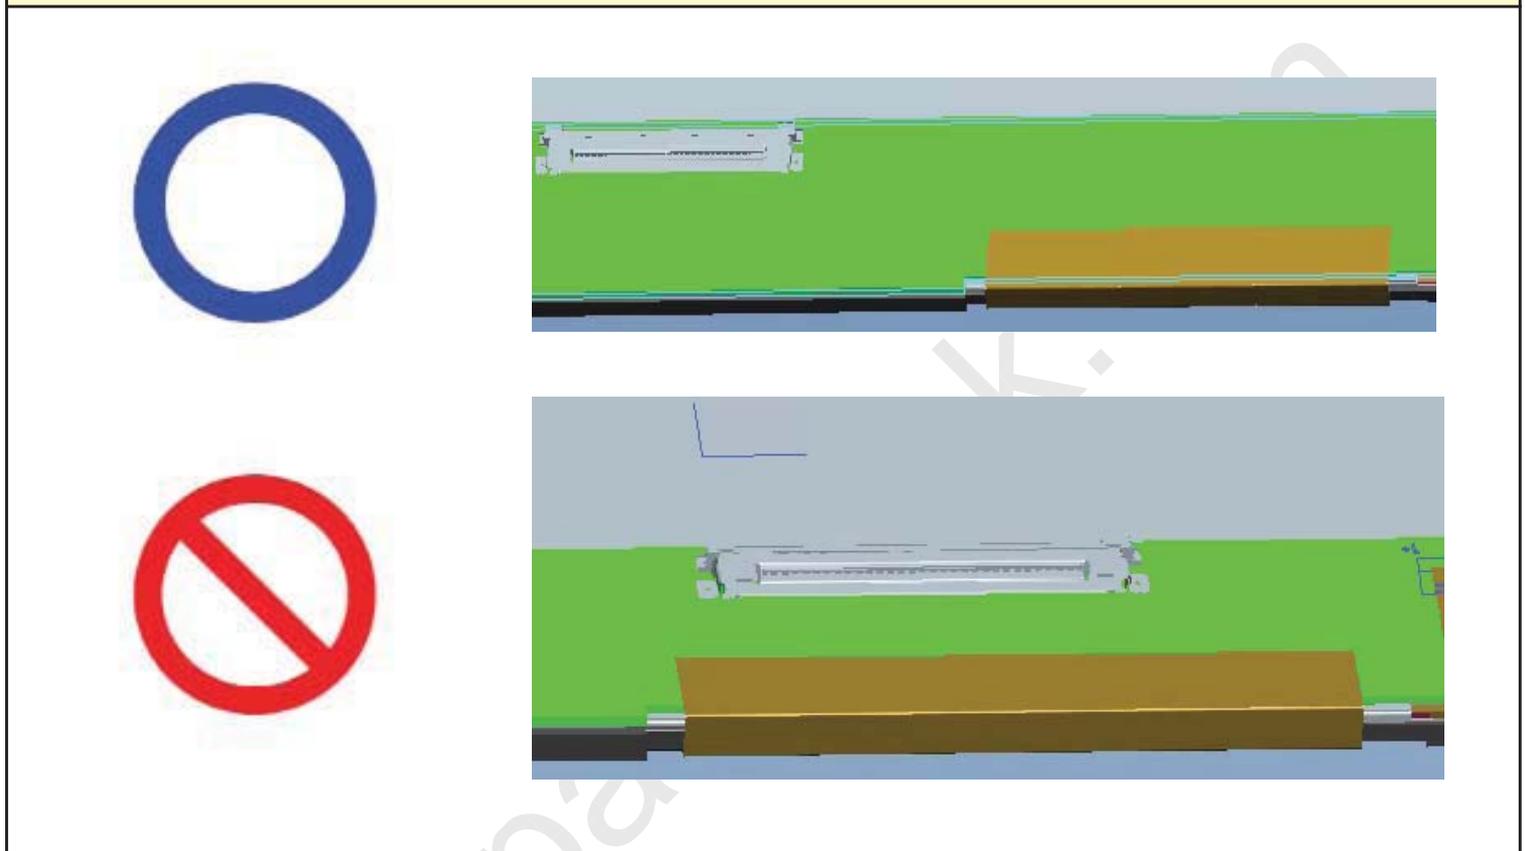

Purpose	Bent product: The position of system connector and FPC should be staggered in X direction. Otherwise, when testing, the system Cable line extrudes FPC, leading to FPC Crack; (Panel FPC Bonding location is related to Mask and can not be changed easily)
---------	---

SPEC. NUMBER	SPEC. TITLE	PAGE
DAS-RD-2019008-O	NV156FHM-N6A V8.1 Product Specification Rev. P0	59 OF 65

A4(210 X 297)



PRODUCT GROUP

REV

ISSUE DATE


Customer Spec

P0


2020.09.01

Appendix C

**HPD Signal recognition**

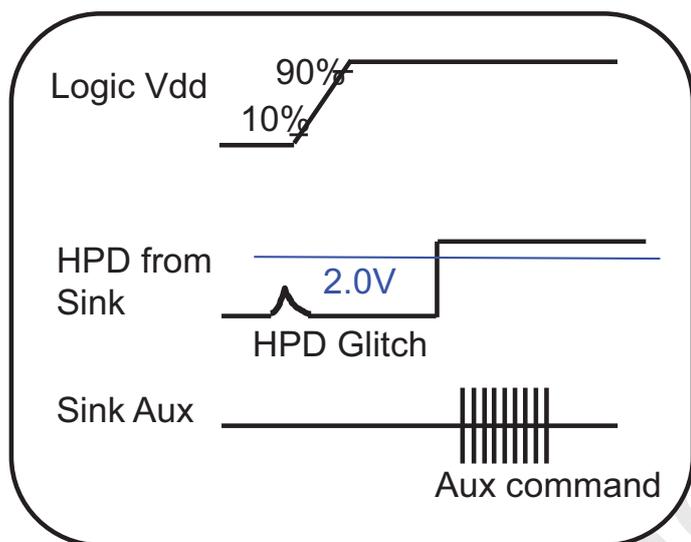

Normal Signal (Ignore HPD Glitch)

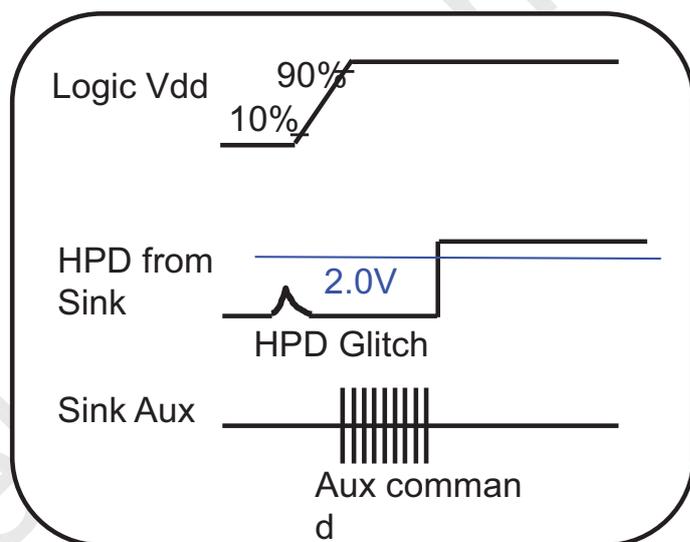

Abnormal Signal

Purpose

When HPD glitch of source device minimum is 2.0(V).

SPEC. NUMBER

SPEC. TITLE

PAGE

NV156FHM-N6A V8.1 Product Specification Rev. P0

60 OF 65


DAS-RD-2019008-O

A4(210 X 297)

	PRODUCT GROUP	REV	ISSUE DATE
	Customer Spec	P0	2020.09.01

Appendix C

**HPD Signal Definition IRQ (Interrupt Request)**

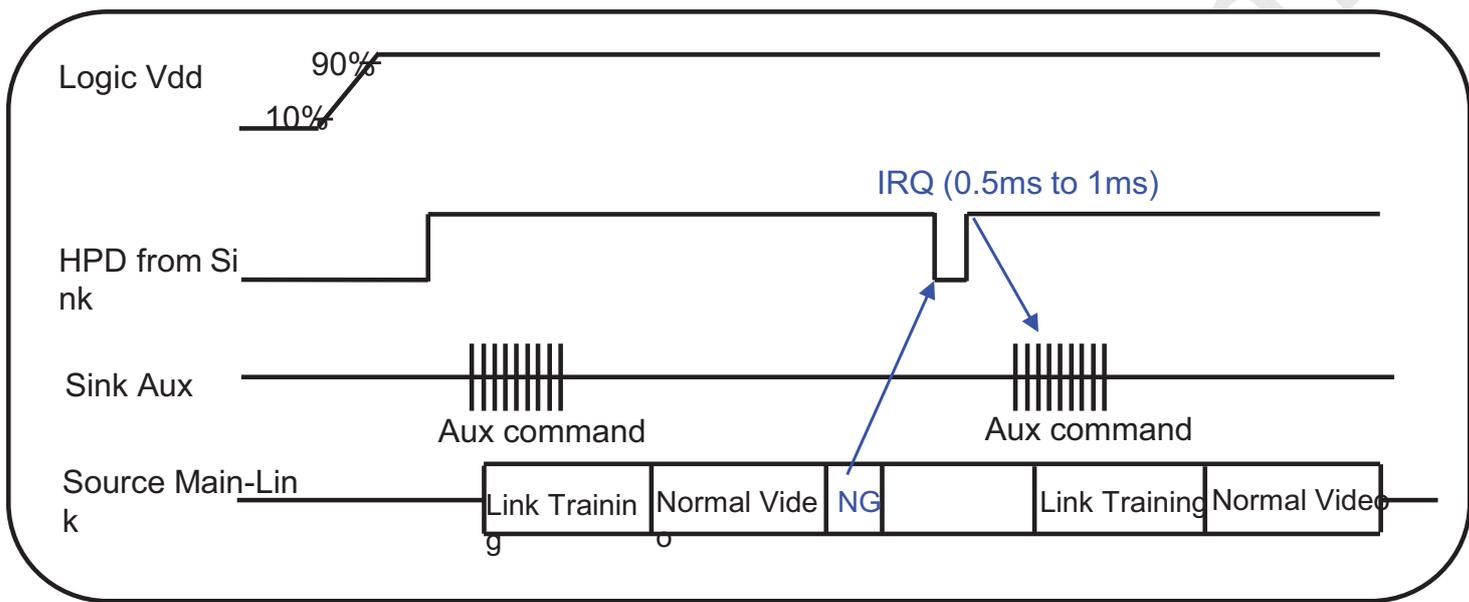



Purpose	When HPD signal low than 0.5ms to 1ms, the source device should check sink status field from the DPCD and take link training again.
---------	---

SPEC. NUMBER	SPEC. TITLE	PAGE
DAS-RD-2019008-O	NV156FHM-N6A V8.1 Product Specification Rev. P0	61 OF 65

	PRODUCT GROUP	REV	ISSUE DATE
	Customer Spec	P0	2020.09.01

Appendix C

**Main link eye diagram of TP3**

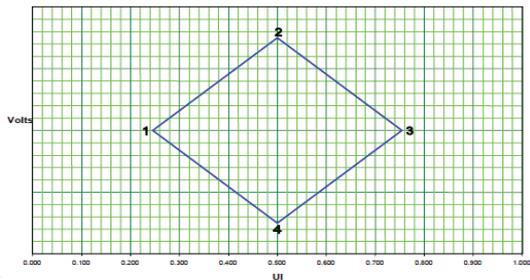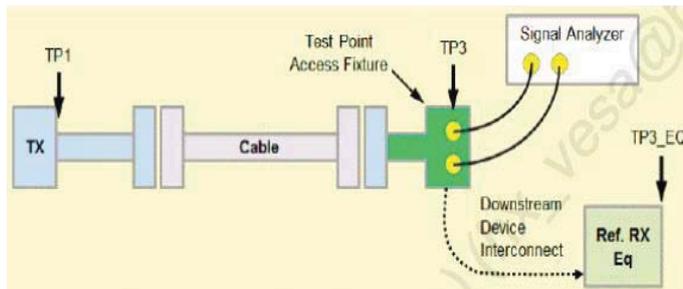

Measured TP3 on LCM connector.

Downstream Device Mask at TP3

	UI	Voltage
1	0.246	0
2	0.5	0.075
3	0.755	0
4	0.5	-0.075

	UI	Voltage
1	0.375	0
2	0.5	0.023
3	0.625	0
4	0.5	-0.023

Eye for TP3 at HBR

Eye for TP3 at RBR

Purpose	<ol style="list-style-type: none"> <li>Main Link EYE Diagram should meet TP3 point of VESA.</li> <li>The measure method is through access fixture.</li> </ol>
---------	---

SPEC. NUMBER	SPEC. TITLE	PAGE
DAS-RD-2019008-O	NV156FHM-N6A V8.1 Product Specification Rev. P0	62 OF 65



PRODUCT GROUP

REV

ISSUE DATE


Customer Spec

P0

2020.09.01

Appendix C

**Impedance Profile through a DP Connector**

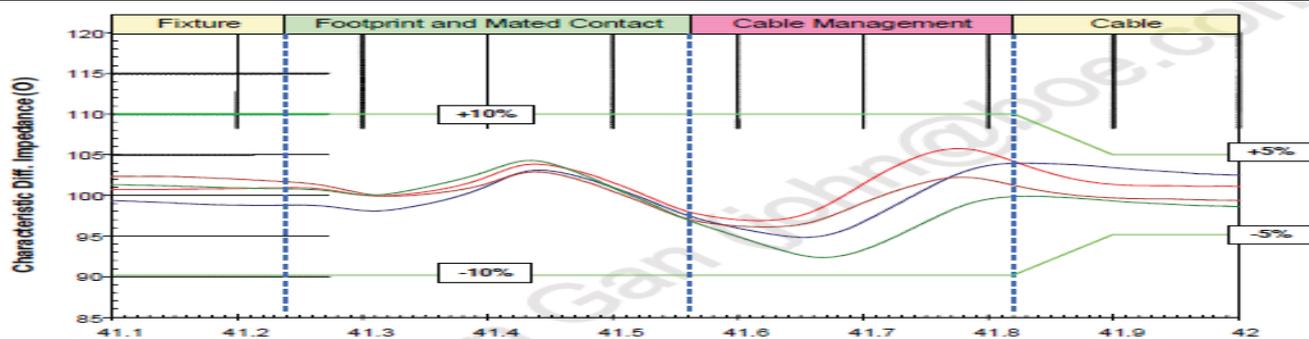

Differential Impedance Profile Measurement Data Example

Segment	Differential Impedance Value	Maximum Tolerance
Fixture	100Ω/85Ω VESA	±10%
Connector	100Ω/85Ω VESA	±10%
Wire management	100Ω/85Ω VESA	±10%
Cable	100Ω/85Ω VESA	±5%

Impedance Profile Values for Cable Assembly

Purpose

Cable Impedance Profile 100ohm for Cable Assembly

SPEC. NUMBER

SPEC. TITLE

PAGE

NV156FHM-N6A V8.1 Product Specification Rev. P0

63 OF 65


DAS-RD-2019008-O

A4(210 X 297)

<b>BOE</b>	PRODUCT GROUP	REV	ISSUE DATE
	Customer Spec	P0	2020.09.01

Appendix C

**Main Link Pixel Freq information value of MSA data**

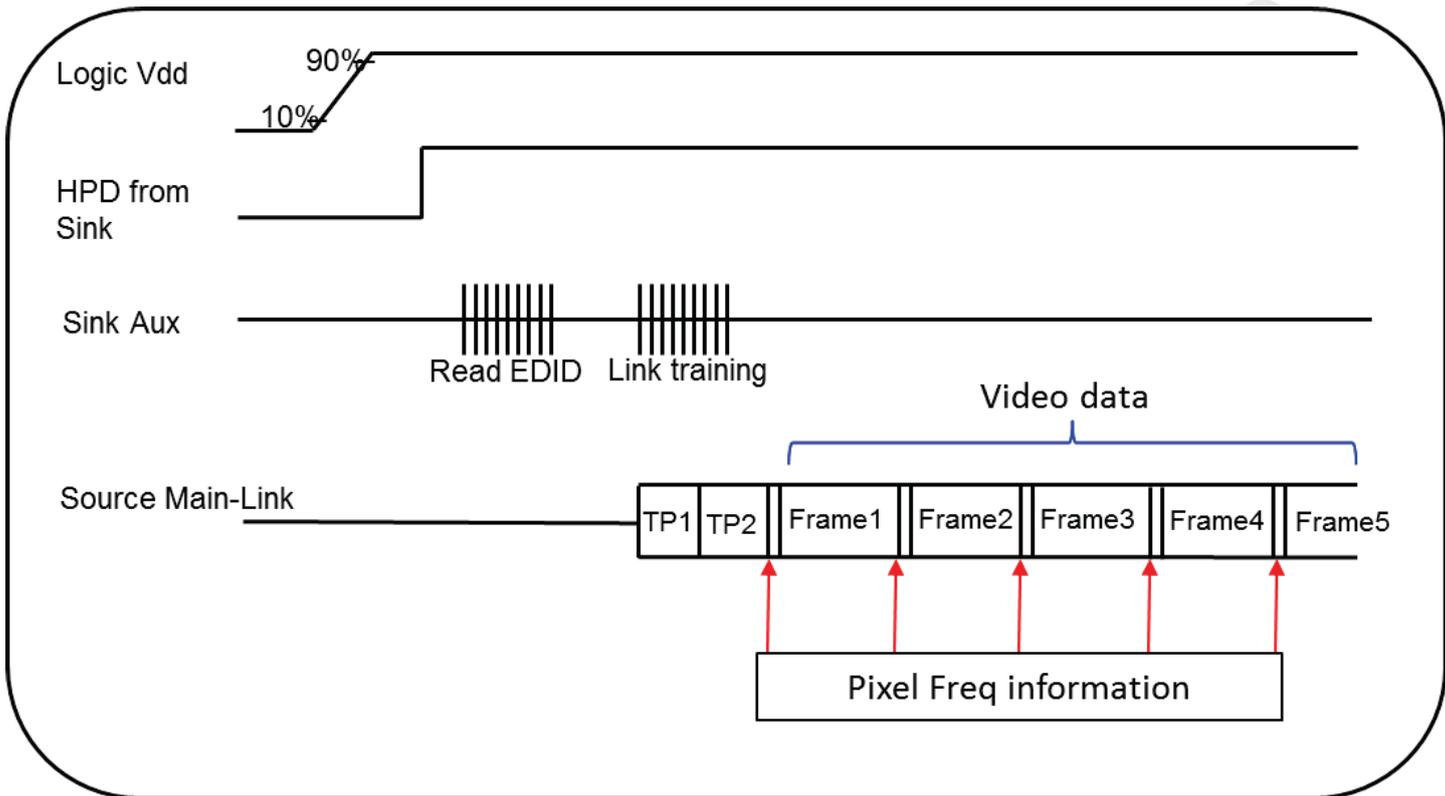

Purpose	<ol style="list-style-type: none"> <li>1. It need to fix pixel freq information value of MSA data output to prevent the initial abnormal pixel freq information value from incoming after power on.</li> <li>2. BOE can read DPCD to check this value. Ex: BIOS is 1.62G , but into windows is 2.7G.</li> </ol>
---------	---

SPEC. NUMBER	SPEC. TITLE	PAGE
DAS-RD-2019008-O	NV156FHM-N6A V8.1 Product Specification Rev. P0	64 OF 65

**BOE**

PRODUCT GROUP

REV


ISSUE DATE

Customer Spec

P0

2020.09.01

## Appendix C

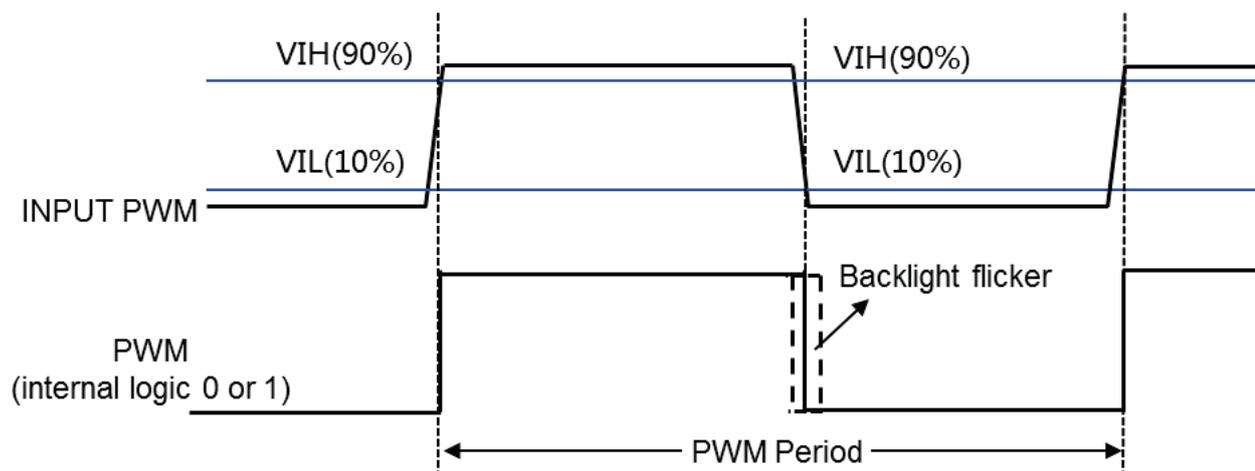**Main Link Pixel Freq information value of MSA data****Example:**

Freq	Cycle Time	PWM Rising Time	PWM Falling Time
200Hz	5ms	$\leq 1\mu s$	$\leq 1\mu s$
1KHz	1ms	$\leq 200ns$	$\leq 200ns$

**Purpose**

1. LED driver need to calculate the duty cycle of input PWM signal.
2. To avoid backlight flicker visible on LCD, system input PWM suggest :  
PWM rising  $\leq 200\text{ppm} \times \text{cycle time}$  ; PWM falling  $\leq 200\text{ppm} \times \text{cycle time}$ .

SPEC. NUMBER

SPEC. TITLE

PAGE

NV156FHM-N6A V8.1 Product Specification Rev. P0

65 OF 65

DAS-RD-2019008-O

A4(210 X 297)