



AUO Display+

Product Specification

G185HAN01.0

☒ Preliminary Specification☐ Final Specification

Module	18.5 Inch Color TFT-LCD
Model Name	G185HAN01.0(04)

Company	
Checked & Approved by	Date

Approved by	Date
Prepared by	
General Display Business Unit / AUO Display Plus Corporation	



AUO Display+

Product Specification

G185HAN01.0

Contents

1.0 Handling Precautions	4
2.0 General Description	5
2.1 Display Characteristics	5
2.2 Optical Characteristics	6
3.0 Functional Block Diagram	9
4.0 Absolute Maximum Ratings	10
4.1 TFT LCD Module	10
4.2 Absolute Ratings of Environment	10
5.0 Electrical characteristics	11
5.1 TFT LCD Module	11
5.1.1 Power Specification	11
5.1.2 Signal Electrical Characteristics	12
5.2 Backlight Unit	13
6.0 Signal Characteristic	14
6.1 Pixel Format Image	14
6.2 The input data format	15
6.3 Signal Description	16
6.4 Timing Characteristics	17
6.5 Timing diagram	19
6.6 Power ON/OFF Sequence	20
7.0 Connector & Pin Assignment	21
7.1 TFT LCD Module	21
7.2 LED Backlight Unit: LED Driver Connector	21
7.3 LED Driver Connector Pin Assignment	22
8.0 Reliability Test	23
9.0 Shipping Label & Packaging	24
9.1 Shipping Label	24
9.2 Packaging	25
9.3 Palletizing	26
10.0 Mechanical Characteristics	27
11 Safety	29
11.1 Keen Edge Requirements	29
11.2 Materials	29
11.3 Capacitors	29
11.4 International Safety Standard Compliance	29

G185HAN01.0. ver. 0.2







AUO Display+

Product Specification

G185HAN01.0

Record of Revision

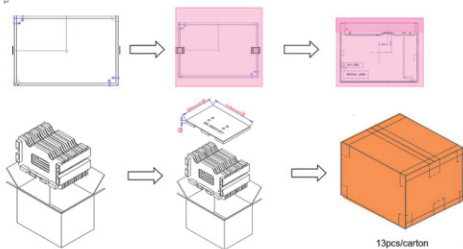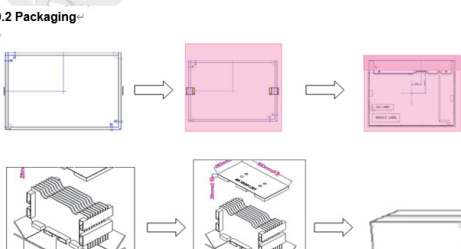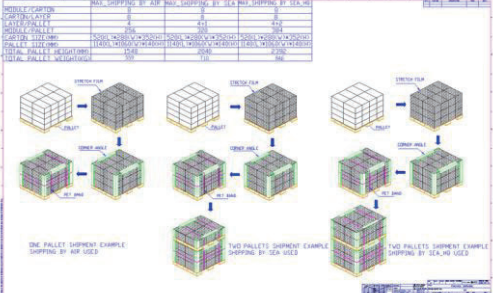Version & Date	Page	Old description	New Description																																																																							
0.1 / 2023/01/30		First Edition																																																																								
0.2 / 2023/07/10	5 13	<table><tr><td colspan="2">Power Consumption¹⁾ (VDD line + LED line)²⁾</td><td>[Watt]³⁾</td><td>20.15W⁴⁾</td></tr><tr><td>Symbol⁵⁾</td><td>Parameter⁶⁾</td><td>Min.⁷⁾</td><td>Typ.⁸⁾</td><td>Max.⁹⁾</td><td>Unit¹⁰⁾</td><td>Remark¹¹⁾</td></tr><tr><td>VCC¹²⁾</td><td>Input Voltage¹³⁾</td><td>10.8¹⁴⁾</td><td>12¹⁵⁾</td><td>13.2¹⁶⁾</td><td>[Volt]¹⁷⁾</td><td></td></tr><tr><td>Icc¹⁸⁾</td><td>Input Current¹⁹⁾</td><td></td><td>1.07²⁰⁾</td><td>1.3²¹⁾</td><td>[A]²²⁾</td><td>100% PWM Duty²³⁾</td></tr><tr><td>Pcc²⁴⁾</td><td>Power Consumption²⁵⁾</td><td></td><td>12.84²⁶⁾</td><td>14.8²⁷⁾</td><td>[Watt]²⁸⁾</td><td>100% PWM Duty²⁹⁾</td></tr></table>	Power Consumption ¹⁾ (VDD line + LED line) ²⁾		[Watt] ³⁾	20.15W ⁴⁾	Symbol ⁵⁾	Parameter ⁶⁾	Min. ⁷⁾	Typ. ⁸⁾	Max. ⁹⁾	Unit ¹⁰⁾	Remark ¹¹⁾	VCC ¹²⁾	Input Voltage ¹³⁾	10.8 ¹⁴⁾	12 ¹⁵⁾	13.2 ¹⁶⁾	[Volt] ¹⁷⁾		Icc ¹⁸⁾	Input Current ¹⁹⁾		1.07 ²⁰⁾	1.3 ²¹⁾	[A] ²²⁾	100% PWM Duty ²³⁾	Pcc ²⁴⁾	Power Consumption ²⁵⁾		12.84 ²⁶⁾	14.8 ²⁷⁾	[Watt] ²⁸⁾	100% PWM Duty ²⁹⁾	<table><tr><td colspan="2">Update power</td><td>[Watt]³⁾</td><td>20.95W (max)⁴⁾</td></tr><tr><td>Symbol⁵⁾</td><td>Parameter⁶⁾</td><td>Min.⁷⁾</td><td>Typ.⁸⁾</td><td>Max.⁹⁾</td><td>Unit¹⁰⁾</td><td>Remark¹¹⁾</td></tr><tr><td>VCC¹²⁾</td><td>Input Voltage¹³⁾</td><td>10.8¹⁴⁾</td><td>12¹⁵⁾</td><td>13.2¹⁶⁾</td><td>[Volt]¹⁷⁾</td><td></td></tr><tr><td>Icc¹⁸⁾</td><td>Input Current¹⁹⁾</td><td></td><td>1.07²⁰⁾</td><td>1.3²¹⁾</td><td>[A]²²⁾</td><td>VCC=12V, 100% PWM Duty²³⁾</td></tr><tr><td>Pcc²⁴⁾</td><td>Power Consumption²⁵⁾</td><td></td><td>12.84²⁶⁾</td><td>15.6²⁷⁾</td><td>[Watt]²⁸⁾</td><td>VCC=12V, 100% PWM Duty²⁹⁾</td></tr></table>	Update power		[Watt] ³⁾	20.95W (max) ⁴⁾	Symbol ⁵⁾	Parameter ⁶⁾	Min. ⁷⁾	Typ. ⁸⁾	Max. ⁹⁾	Unit ¹⁰⁾	Remark ¹¹⁾	VCC ¹²⁾	Input Voltage ¹³⁾	10.8 ¹⁴⁾	12 ¹⁵⁾	13.2 ¹⁶⁾	[Volt] ¹⁷⁾		Icc ¹⁸⁾	Input Current ¹⁹⁾		1.07 ²⁰⁾	1.3 ²¹⁾	[A] ²²⁾	VCC=12V, 100% PWM Duty ²³⁾	Pcc ²⁴⁾	Power Consumption ²⁵⁾		12.84 ²⁶⁾	15.6 ²⁷⁾	[Watt] ²⁸⁾	VCC=12V, 100% PWM Duty ²⁹⁾							
Power Consumption ¹⁾ (VDD line + LED line) ²⁾		[Watt] ³⁾	20.15W ⁴⁾																																																																							
Symbol ⁵⁾	Parameter ⁶⁾	Min. ⁷⁾	Typ. ⁸⁾	Max. ⁹⁾	Unit ¹⁰⁾	Remark ¹¹⁾																																																																				
VCC ¹²⁾	Input Voltage ¹³⁾	10.8 ¹⁴⁾	12 ¹⁵⁾	13.2 ¹⁶⁾	[Volt] ¹⁷⁾																																																																					
Icc ¹⁸⁾	Input Current ¹⁹⁾		1.07 ²⁰⁾	1.3 ²¹⁾	[A] ²²⁾	100% PWM Duty ²³⁾																																																																				
Pcc ²⁴⁾	Power Consumption ²⁵⁾		12.84 ²⁶⁾	14.8 ²⁷⁾	[Watt] ²⁸⁾	100% PWM Duty ²⁹⁾																																																																				
Update power		[Watt] ³⁾	20.95W (max) ⁴⁾																																																																							
Symbol ⁵⁾	Parameter ⁶⁾	Min. ⁷⁾	Typ. ⁸⁾	Max. ⁹⁾	Unit ¹⁰⁾	Remark ¹¹⁾																																																																				
VCC ¹²⁾	Input Voltage ¹³⁾	10.8 ¹⁴⁾	12 ¹⁵⁾	13.2 ¹⁶⁾	[Volt] ¹⁷⁾																																																																					
Icc ¹⁸⁾	Input Current ¹⁹⁾		1.07 ²⁰⁾	1.3 ²¹⁾	[A] ²²⁾	VCC=12V, 100% PWM Duty ²³⁾																																																																				
Pcc ²⁴⁾	Power Consumption ²⁵⁾		12.84 ²⁶⁾	15.6 ²⁷⁾	[Watt] ²⁸⁾	VCC=12V, 100% PWM Duty ²⁹⁾																																																																				
	6	<table><tr><td rowspan="6">Color / Chromaticity¹⁾ Coordinates (CIE)²⁾</td><td>Red x³⁾</td><td>0.596⁴⁾</td><td>0.646⁵⁾</td><td>0.696⁶⁾</td><td rowspan="8">5⁷⁾</td></tr><tr><td>Red y⁸⁾</td><td>0.283⁹⁾</td><td>0.333¹⁰⁾</td><td>0.383¹¹⁾</td></tr><tr><td>Green x¹²⁾</td><td>0.255¹³⁾</td><td>0.305¹⁴⁾</td><td>0.355¹⁵⁾</td></tr><tr><td>Green y¹⁶⁾</td><td>0.565¹⁷⁾</td><td>0.615¹⁸⁾</td><td>0.665¹⁹⁾</td></tr><tr><td>Blue x²⁰⁾</td><td>0.105²¹⁾</td><td>0.155²²⁾</td><td>0.205²³⁾</td></tr><tr><td>Blue y²⁴⁾</td><td>0.010²⁵⁾</td><td>0.060²⁶⁾</td><td>0.110²⁷⁾</td></tr><tr><td rowspan="2">Color Coordinates (CIE) White²⁸⁾</td><td>White x²⁹⁾</td><td>0.249³⁰⁾</td><td>0.299³¹⁾</td><td>0.349³²⁾</td></tr><tr><td>White y³³⁾</td><td>0.265³⁴⁾</td><td>0.315³⁵⁾</td><td>0.365³⁶⁾</td></tr></table>	Color / Chromaticity ¹⁾ Coordinates (CIE) ²⁾	Red x ³⁾	0.596 ⁴⁾	0.646 ⁵⁾	0.696 ⁶⁾	5 ⁷⁾	Red y ⁸⁾	0.283 ⁹⁾	0.333 ¹⁰⁾	0.383 ¹¹⁾	Green x ¹²⁾	0.255 ¹³⁾	0.305 ¹⁴⁾	0.355 ¹⁵⁾	Green y ¹⁶⁾	0.565 ¹⁷⁾	0.615 ¹⁸⁾	0.665 ¹⁹⁾	Blue x ²⁰⁾	0.105 ²¹⁾	0.155 ²²⁾	0.205 ²³⁾	Blue y ²⁴⁾	0.010 ²⁵⁾	0.060 ²⁶⁾	0.110 ²⁷⁾	Color Coordinates (CIE) White ²⁸⁾	White x ²⁹⁾	0.249 ³⁰⁾	0.299 ³¹⁾	0.349 ³²⁾	White y ³³⁾	0.265 ³⁴⁾	0.315 ³⁵⁾	0.365 ³⁶⁾	<table><tr><td colspan="2">Update Color / Chromaticity</td><td>Red x³⁾</td><td>0.594⁴⁾</td><td>0.644⁵⁾</td><td>0.694⁶⁾</td><td rowspan="8">5⁷⁾</td></tr><tr><td>Red y⁸⁾</td><td>0.282⁹⁾</td><td>0.332¹⁰⁾</td><td>0.382¹¹⁾</td></tr><tr><td>Green x¹²⁾</td><td>0.244¹³⁾</td><td>0.294¹⁴⁾</td><td>0.344¹⁵⁾</td></tr><tr><td>Green y¹⁶⁾</td><td>0.556¹⁷⁾</td><td>0.606¹⁸⁾</td><td>0.656¹⁹⁾</td></tr><tr><td>Blue x²⁰⁾</td><td>0.096²¹⁾</td><td>0.146²²⁾</td><td>0.196²³⁾</td></tr><tr><td>Blue y²⁴⁾</td><td>0.020²⁵⁾</td><td>0.070²⁶⁾</td><td>0.120²⁷⁾</td></tr><tr><td rowspan="2">Color Coordinates (CIE) White²⁸⁾</td><td>White x²⁹⁾</td><td>0.249³⁰⁾</td><td>0.299³¹⁾</td><td>0.349³²⁾</td></tr><tr><td>White y³³⁾</td><td>0.265³⁴⁾</td><td>0.315³⁵⁾</td><td>0.365³⁶⁾</td></tr></table>	Update Color / Chromaticity		Red x ³⁾	0.594 ⁴⁾	0.644 ⁵⁾	0.694 ⁶⁾	5 ⁷⁾	Red y ⁸⁾	0.282 ⁹⁾	0.332 ¹⁰⁾	0.382 ¹¹⁾	Green x ¹²⁾	0.244 ¹³⁾	0.294 ¹⁴⁾	0.344 ¹⁵⁾	Green y ¹⁶⁾	0.556 ¹⁷⁾	0.606 ¹⁸⁾	0.656 ¹⁹⁾	Blue x ²⁰⁾	0.096 ²¹⁾	0.146 ²²⁾	0.196 ²³⁾	Blue y ²⁴⁾	0.020 ²⁵⁾	0.070 ²⁶⁾	0.120 ²⁷⁾	Color Coordinates (CIE) White ²⁸⁾	White x ²⁹⁾	0.249 ³⁰⁾	0.299 ³¹⁾	0.349 ³²⁾	White y ³³⁾	0.265 ³⁴⁾	0.315 ³⁵⁾	0.365 ³⁶⁾
Color / Chromaticity ¹⁾ Coordinates (CIE) ²⁾	Red x ³⁾	0.596 ⁴⁾		0.646 ⁵⁾	0.696 ⁶⁾	5 ⁷⁾																																																																				
	Red y ⁸⁾	0.283 ⁹⁾		0.333 ¹⁰⁾	0.383 ¹¹⁾																																																																					
	Green x ¹²⁾	0.255 ¹³⁾		0.305 ¹⁴⁾	0.355 ¹⁵⁾																																																																					
	Green y ¹⁶⁾	0.565 ¹⁷⁾		0.615 ¹⁸⁾	0.665 ¹⁹⁾																																																																					
	Blue x ²⁰⁾	0.105 ²¹⁾		0.155 ²²⁾	0.205 ²³⁾																																																																					
	Blue y ²⁴⁾	0.010 ²⁵⁾	0.060 ²⁶⁾	0.110 ²⁷⁾																																																																						
Color Coordinates (CIE) White ²⁸⁾	White x ²⁹⁾	0.249 ³⁰⁾	0.299 ³¹⁾	0.349 ³²⁾																																																																						
	White y ³³⁾	0.265 ³⁴⁾	0.315 ³⁵⁾	0.365 ³⁶⁾																																																																						
Update Color / Chromaticity		Red x ³⁾	0.594 ⁴⁾	0.644 ⁵⁾	0.694 ⁶⁾	5 ⁷⁾																																																																				
Red y ⁸⁾	0.282 ⁹⁾	0.332 ¹⁰⁾	0.382 ¹¹⁾																																																																							
Green x ¹²⁾	0.244 ¹³⁾	0.294 ¹⁴⁾	0.344 ¹⁵⁾																																																																							
Green y ¹⁶⁾	0.556 ¹⁷⁾	0.606 ¹⁸⁾	0.656 ¹⁹⁾																																																																							
Blue x ²⁰⁾	0.096 ²¹⁾	0.146 ²²⁾	0.196 ²³⁾																																																																							
Blue y ²⁴⁾	0.020 ²⁵⁾	0.070 ²⁶⁾	0.120 ²⁷⁾																																																																							
Color Coordinates (CIE) White ²⁸⁾	White x ²⁹⁾	0.249 ³⁰⁾	0.299 ³¹⁾	0.349 ³²⁾																																																																						
	White y ³³⁾	0.265 ³⁴⁾	0.315 ³⁵⁾	0.365 ³⁶⁾																																																																						
	25	9.2 Packaging¹⁾  Max capacity : 13 TFT-LCD module per carton²⁾ Max weight : 18.5 kg per carton³⁾ Outside dimension of carton: 530mm(L)* 384mm(W)*355mm(H)⁴⁾ Pallet size : 1180 mm *1150 mm * 132mm⁵⁾ Box stacked⁶⁾ By air⁷⁾ : (2 *3) *4 layers , one pallet put 24 boxes , total 312pcs module⁸⁾ By sea⁹⁾ : (2 *3) *4 layers + (2 *3) *1 layers , two pallet put 30 boxes , total 390pcs module¹⁰⁾ By sea_HQ¹¹⁾ : (2 *3) *4 layers+(2 *3) *2 layers, two pallet put 36 boxes, total 468pcs module¹²⁾	9.2 Packaging¹⁾  Max capacity : 8 TFT-LCD module per carton²⁾ Max weight : 17 kg per carton³⁾ Outside dimension of carton: 520mm(L)* 280mm(W)*352mm(H)⁴⁾ Pallet size: 1150 mm *1100 mm * 132mm⁵⁾ Box stacked⁶⁾ By air⁷⁾ : (2 *4) *4 layers , one pallet put 32 boxes , total 256pcs module⁸⁾ By sea⁹⁾ : (2 *4) *4 layers + (2 *4) *1 layers , two pallet put 40 boxes , total320pcs module¹⁰⁾ By sea_HQ¹¹⁾ : (2 *4) *4 layers+(2 *4) *2 layers, two pallet put 48 boxes, total 384pcs module¹²⁾																																																																							
	26	9.3 Palletizing¹⁾  By Air : One pallet By Sea : Double Pallet HQ : Double Pallet																																																																								

G185HAN01.0. ver. 0.2



Product Specification

G185HAN01.0

AUO Display+

1.0 Handling Precautions

- 1) Since front polarizer is easily damaged, pay attention not to scratch it.
- 2) Be sure to turn off power supply when inserting or disconnecting from input connector.
- 3) Wipe off water drop immediately. Long contact with water may cause discoloration or spots.
- 4) When the panel surface is soiled, wipe it with absorbent cotton or other soft cloth.
- 5) Since the panel is made of glass, it may break or crack if dropped or bumped on hard surface.
- 6) Since CMOS LSI is used in this module, take care of static electricity and insure human earth when handling.
- 7) Do not open or modify the Module Assembly.
- 8) Do not press the reflector sheet at the back of the module to any directions.
- 9) In case if a Module has to be put back into the packing container slot after it was taken out from the container, do not press the center of LED lightbar edge. Instead, press at the far ends of the LED light bar edge softly. Otherwise the TFT Module may be damaged.
- 10) At the insertion or removal of the Signal Interface Connector, be sure not to rotate nor tilt the Interface Connector of the TFT Module.
- 11) After installation of the TFT Module into an enclosure, do not twist nor bend the TFT Module even momentarily. While designing the enclosure, it should be taken into consideration that no bending/twisting forces are applied to the TFT Module from outside. Otherwise the TFT Module may be damaged.
- 12) Small amount of materials having no flammability grade is used in the LCD module. The LCD module should be supplied by power complied with requirements of Limited Power Source (IEC60950-1 or UL60950-1), or be applied exemption.



Product Specification

G185HAN01.0

AUO Display+

2.0 General Description

This specification applies to the 18.5 inch-wide Color AHVA (IPS-like) TFT-LCD Module G185HAN01.0. The display supports the FHD [1920(H) x 1080(V)] screen format and 16.7M colors (True 8 bit). All input signals are LVDS interface compatible.

2.1 Display Characteristics

The following items are characteristics summary on the table under 25°C condition:

ITEMS	Unit	SPECIFICATIONS
Screen Diagonal	[mm]	469.16(18.47")
Active Area	[mm]	408.96 (H) x 230.04 (V)
Pixels H x V		1920x1080
Pixel Pitch	[um]	213 (per one triad) × 213
Pixel Arrangement		R.G.B. Vertical Stripe
Display Mode		AHVA mode, Normally black
White Luminance (Center)	[cd/m ²]	350 cd/m ² (Typ.)
Contrast Ratio		1000 (Typ.)
Optical Response Time	[msec]	20ms
Nominal Input Voltage VDD	[Volt]	5 V (Typ)
Power Consumption (VDD line + LED line)	[Watt]	20.95 W(max)
Weight	[Grams]	1750 (Typ)
Physical Size	[mm]	430.4 (W) x 254.6 (H) Typ. x 12.0(D)Typ
Electrical Interface		Dual LVDS
Support Color		16.7M colors, True 8 bit
Surface Treatment		Anti-Glare, 3H
RoHS Compliance		RoHS Compliance
Temperature Range		
Operating	[°C]	-30~ 80
Storage (Shipping)	[°C]	-30~ 80

G185HAN01.0. ver. 0.2



Product Specification

G185HAN01.0

AUO Display+

2.2 Optical Characteristics

The optical characteristics are measured under stable conditions at 25 °C:

Item	Unit	Conditions	Min.	Typ.	Max.	Note
Viewing Angle	[degree]	Horizontal (Right) CR >10 (Left)		89 89	- -	2
		Vertical (Up) CR > 10 (Down)		89 89	- -	
Contrast ratio		Normal Direction	800	1000	-	3
Response Time	[msec]	Raising Time (T _{IR})		10	20	4
		Falling Time (T _{IF})		10	20	
		Raising + Falling		20	40	
Color / Chromaticity Coordinates (CIE)		Red x	0.594	0.644	0.694	5
		Red y	0.282	0.332	0.382	
		Green x	0.244	0.294	0.344	
		Green y	0.556	0.606	0.656	
		Blue x	0.096	0.146	0.196	
		Blue y	0.020	0.070	0.120	
Color Coordinates (CIE) White		White x	0.249	0.299	0.349	
		White y	0.265	0.315	0.365	
Central Luminance	[cd/m ²]		280	350		6
Luminance Uniformity	[%]		80	85		7
Color Gamut	%			72		

G185HAN01.0. ver. 0.2




Product Specification

G185HAN01.0

AUO Display+


Note 1: Measurement method

The LCD module should be stabilized at given temperature for 30 minutes to avoid abrupt temperature change during measuring (at surface 35°C). In order to stabilize the luminance, the measurement should be executed after lighting Backlight for 30 minutes in a stable, windless and dark room.

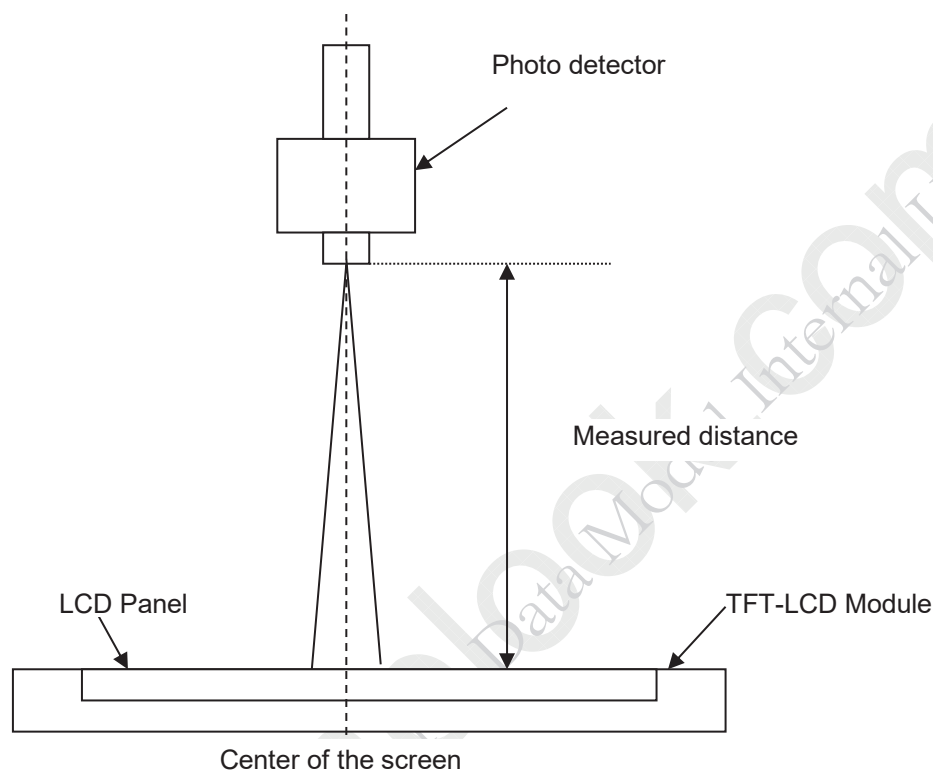

Note 2: Definition of viewing angle measured by ELDIM (EZContrast 88)

Viewing angle is the measurement of contrast ratio ≥ 10 , at the screen center, over a 180° horizontal and 180° vertical range (off-normal viewing angles). The 180° viewing angle range is broken down as follows; 90° (θ) horizontal left and right and 90° (ϕ) vertical, high (up) and low (down). The measurement direction is typically perpendicular to the display surface with the screen rotated about its center to develop the desired measurement viewing angle.

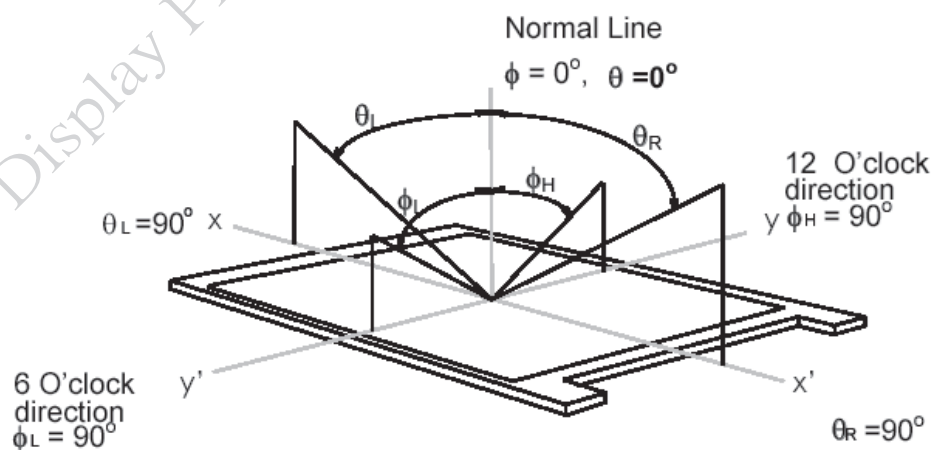

Note 3: Contrast ratio is measured by TOPCON SR-3

G185HAN01.0. ver. 0.2



Product Specification


G185HAN01.0

AUO Display+

Note 4: Definition of Response time measured by Westar TRD-100A

The output signals of photo detector are measured when the input signals are changed from "Full Black" to "Full White" (rising time, T_{rR}), and from "Full White" to "Full Black" (falling time, T_{rF}), respectively. The response time is interval between the 10% and 90% (1 frame at 60 Hz) of amplitudes.


$T_{rR} + T_{rF} = 20 \text{ msec (typ.)}$.

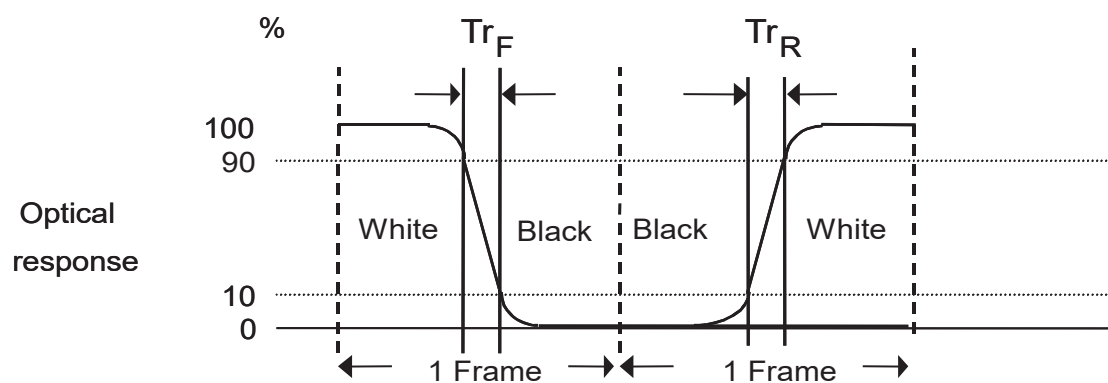

Note 5: Color chromaticity and coordinates (CIE) is measured by TOPCON SR-3

Note 6: Central luminance is measured by TOPCON SR-3

Note 7: Luminance uniformity of these 9 points is defined as below and measured by TOPCON SR-3

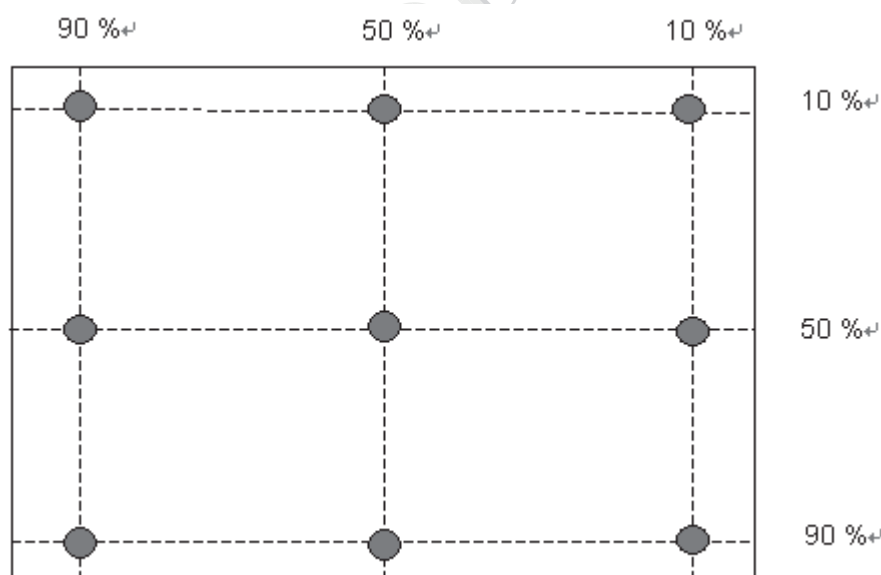

$$\text{Uniformity} = \frac{\text{Minimum Luminance in 9 points (1-9)}}{\text{Maximum Luminance in 9 Points (1-9)}}$$

G185HAN01.0. ver. 0.2




Product Specification

G185HAN01.0

AUO Display+

3.0 Functional Block Diagram

The following diagram shows the functional block of the 18.5 inch Color TFT-LCD Module:

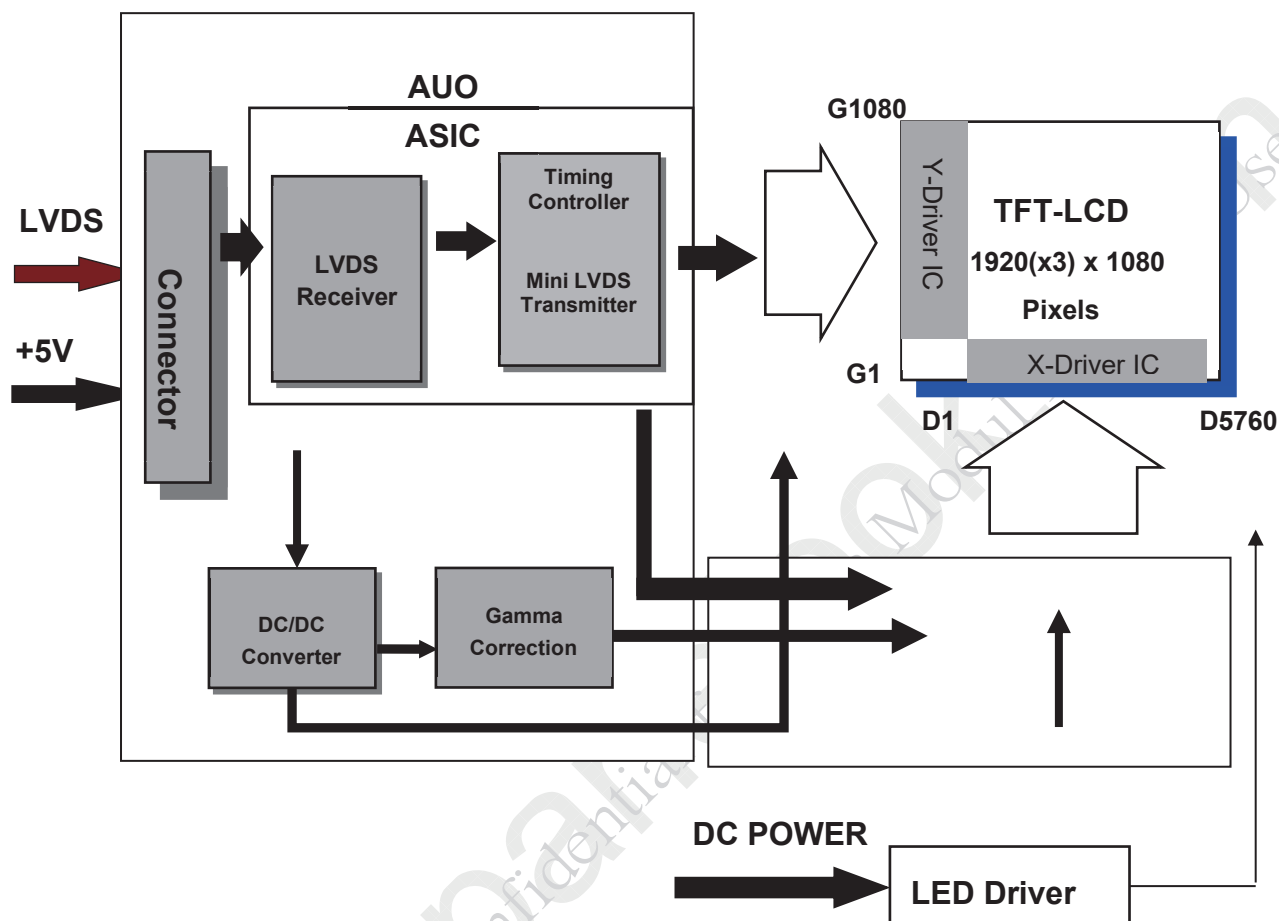

I/F PCB Interface:

FI-XB30SSRLA-HF-16-R3500 (JAE)

Mating Type:

FI-X30HL or FI-X30C2L-NPB



Product Specification

G185HAN01.0

AUO Display+

4.0 Absolute Maximum Ratings

Absolute maximum ratings of the module are as following:

4.1 TFT LCD Module

Item	Symbol	Min	Max	Unit	Conditions
Logic/LCD Drive Voltage	VDD	-0.3	+5.5	[Volt]	Note 1,2


4.2 Absolute Ratings of Environment

Item	Symbol	Min.	Max.	Unit	Conditions
Operating Temperature	TOP	-30	80	[°C]	Note 3 & 4
Operation Humidity	HOP	5	95	[%RH]	
Storage Temperature	TST	-30	80	[°C]	
Storage Humidity	HST	5	95	[%RH]	

Note 1: With in Ta (25 °C)

Note 2: Permanent damage to the device may occur if exceeding maximum values

Note 3: For quality performance, please refer to AUO IIS(Incoming Inspection Standard).

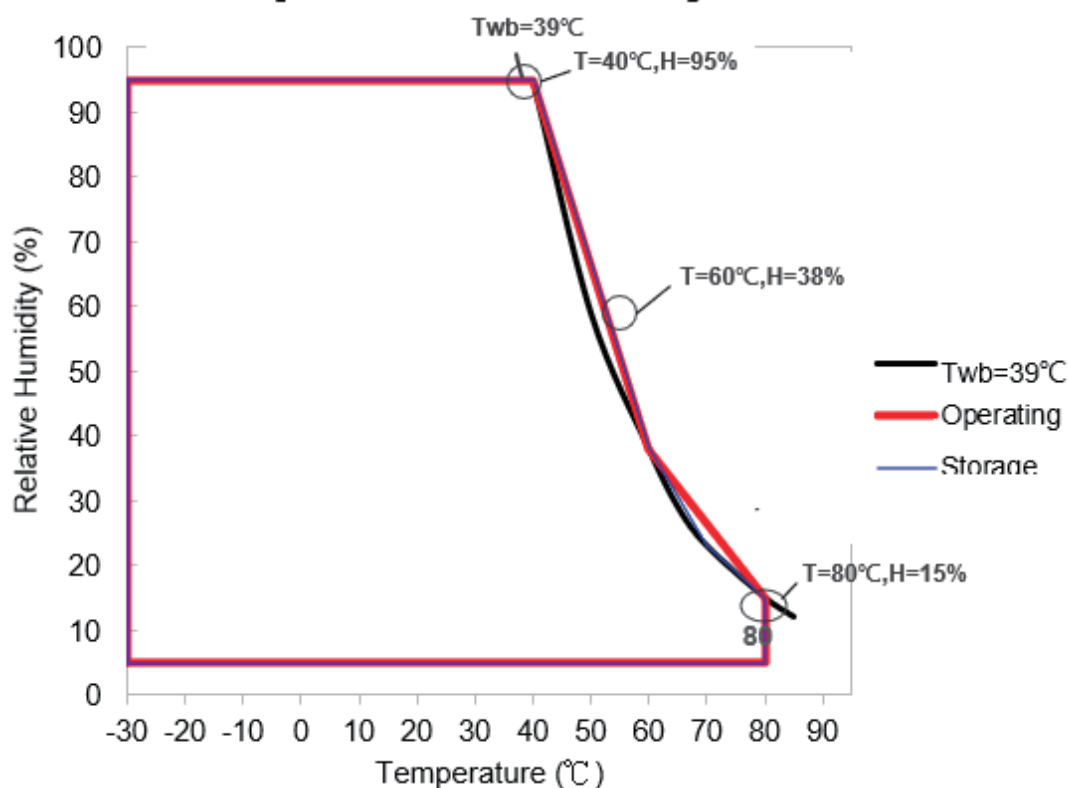

G185HAN01.0. ver. 0.2



Product Specification

G185HAN01.0

AUO Display+

5.0 Electrical characteristics

5.1 TFT LCD Module



5.1.1 Power Specification

Input power specifications are as follows:

Symbol	Parameter	Min	Typ	Max	Unit	Conditions
VDD	Logic/LCD Drive Voltage	4.5	5.0	5.5	[Volt]	+/-10%
IDD	Input Current	-	0.89	1.07	[A]	VDD= 5.0V, All White Pattern At 60Hz,
PDD	VDD Power	-	4.45	5.35	[Watt]	VDD= 5.0V, All White Pattern At 60Hz
IRush	Inrush Current	-	2.7	3.4	[A]	Note 1
VDDrp	Allowable Logic/LCD Drive Ripple Voltage	-	-	300	[mV] p-p	VDD= 5.0V, All White Pattern At 60Hz

Note 1: Measurement conditions:

The duration of rising time of power input is 470us.

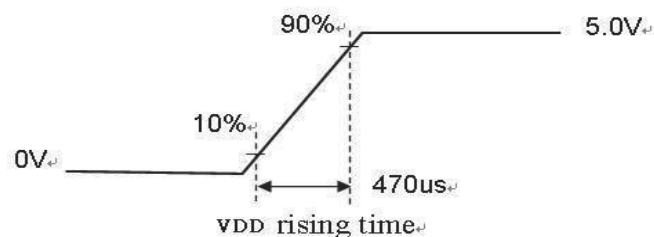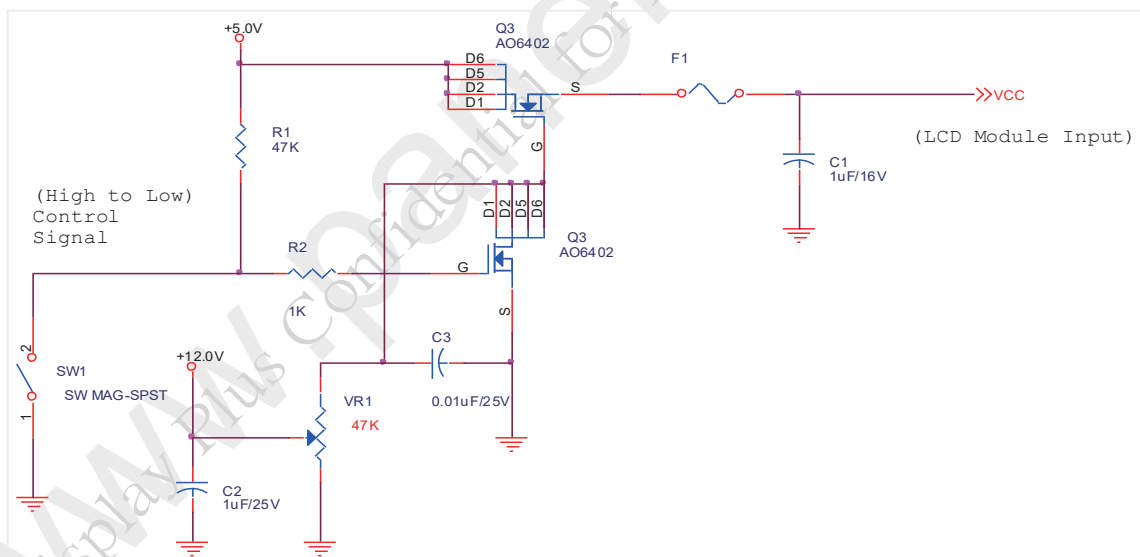

G185HAN01.0. ver. 0.2



Product Specification

G185HAN01.0

AUO Display+


5.1.2 Signal Electrical Characteristics

Input signals shall be low or Hi-Z state when VDD is off. Please refer to specifications of SN75LVDS82DGG (Texas Instruments) in detail.

Characteristics of each signal are as follows:

Symbol	Parameter	Min	Typ	Max	Units	Condition
VTH	Differential Input High Threshold	-		100	[mV]	VICM = 1.2V Note 1
VTL	Differential Input Low Threshold	-100		-	[mV]	VICM = 1.2V Note 1
VID	Input Differential Voltage	100	400	600	[mV]	Note 1
VICM	Differential Input Common Mode Voltage	1.125	-	1.375	[V]	VTH-VTL = 200mV (max) Note 1

Note 1: LVDS Signal Waveform

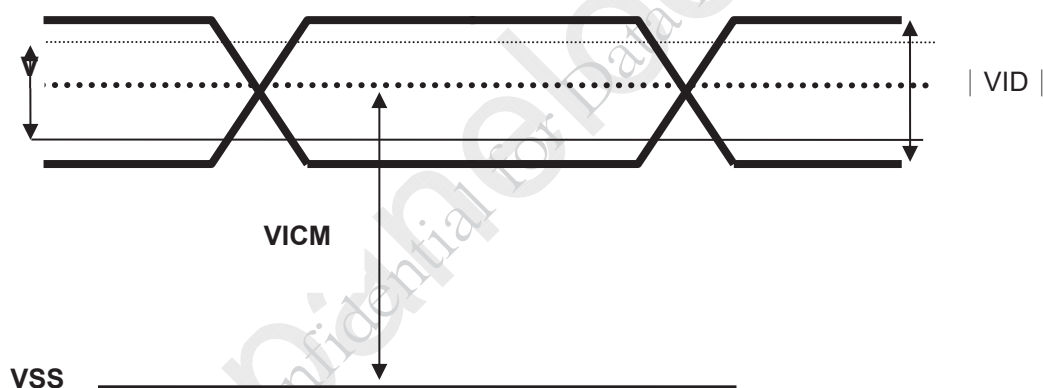

G185HAN01.0. ver. 0.2



Product Specification

G185HAN01.0

AUO Display+

5.2 Backlight Unit

Following characteristics are measured under a stable condition at 25 °C (Room Temperature):

Symbol	Parameter	Min.	Typ.	Max.	Unit	Remark
VCC	Input Voltage	10.8	12	13.2	[Volt]	
I _{VCC}	Input Current		1.07	1.3	[A]	VCC=12V, 100% PWM Duty
P _{VCC}	Power Consumption		12.84	15.6	[Watt]	VCC=12V, 100% PWM Duty
I _{rush LED}	Inrush Current	-		3	[A]	at rising time=470us
VLED on/off	On Control Voltage	3	5	5.5	Volt	
	Off Control Voltage			0.8	Volt	
F _{PWM}	Dimming Frequency	200	-	20k	[Hz]	
	Swing Voltage	3	3.3	5	V	
	High Voltage	3	3.3	5	Volt	
	Low Voltage			0.8	Volt	
	Dimming Duty 200~5K	5	-	100	%	
	Dimming Duty 5K~20K	15	-	100	%	
I _F	LED Forward Current		58		mA	Ta = 25 °C
V _F	LED Forward Voltage	-	3.0	3.3	Volt	I _F =58mA, Ta = 25°C
P _{LED}	LED Power Consumption	-		10.72	Watt	I _F =58mA, Ta = 25°C
LED Lifetime		50,000			Hrs	I _F =58mA, Ta= 25°C

Note 1: Ta means ambient temperature of TFT-LCD module.

Note 2: VCC, I_{VCC}, P_{VCC}, I_{rush LED} are defined for LED B/L.(100% duty of PWM dimming)

Note 3: I_F, V_F, P_{LED} are defined for single LED.

Note 4: If G185HAN01.0 module is driven by high current or at high ambient temperature & humidity condition. The operating life will be reduced.

Note 5: Operation life means brightness goes down to 50% initial brightness. Minimum operating life time is estimated data.

Note 6: Each LED light bar consists of 56 pcs LED package (7 strings x 8pcs / string)

G185HAN01.0. ver. 0.2

© AUO Display Plus Corporation Proprietary

13/29



Product Specification

G185HAN01.0

AUO Display+

6.0 Signal Characteristic

6.1 Pixel Format Image

Following figure shows the relationship of the input signals and LCD pixel format.

	1			2									1919			1920		
1st Line	R	G	B	R	G	B							R	G	B	R	G	B
	.			.			.						.			.		
	.			.			.						.			.		
	.			.			.						.			.		
	.			.			.						.			.		
	.			.			.						.			.		
	.			.			.						.			.		
	.			.			.						.			.		
	.			.			.						.			.		
	.			.			.						.			.		
1080 Line	R	G	B	R	G	B							R	G	B	R	G	B




Product Specification

G185HAN01.0

AUO Display+

6.2 The input data format

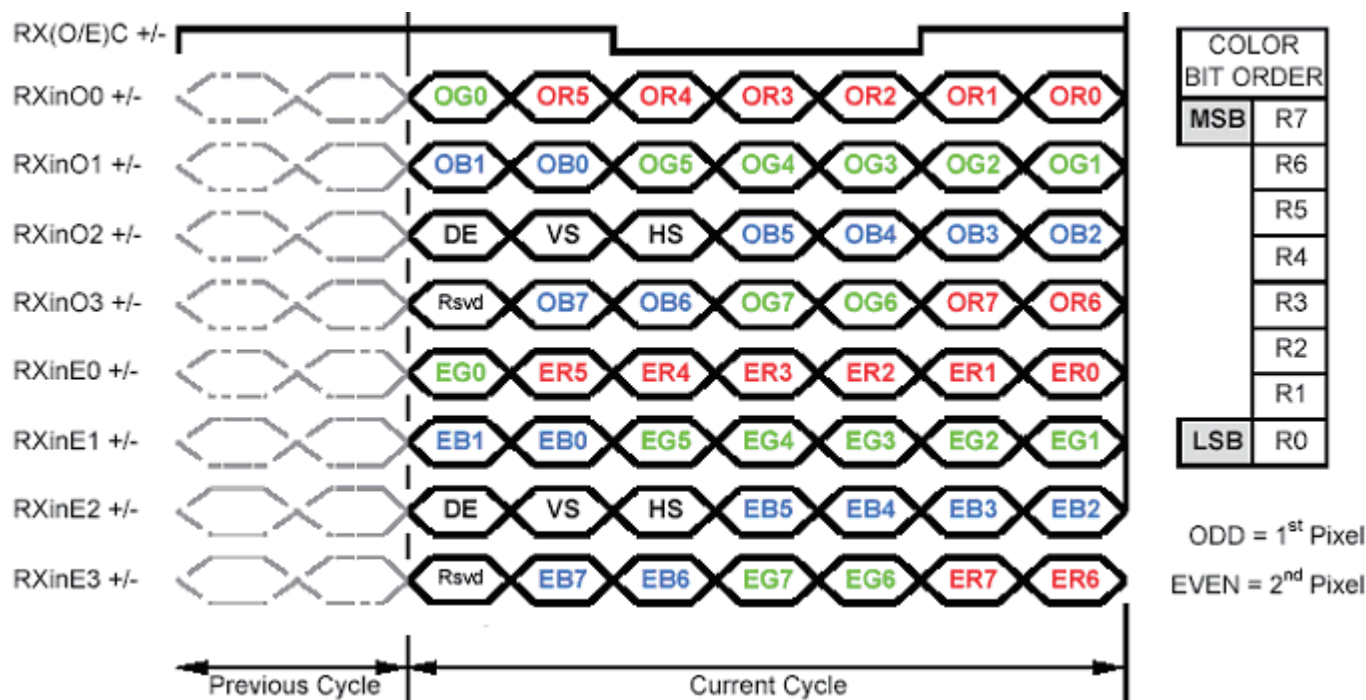

Note1: Normally DE mode only. VS and HS on EVEN channel are not used.

Note2: Please follow VESA.

Note3: 8-bits signal input.

G185HAN01.0. ver. 0.2

© AUO Display Plus Corporation Proprietary

15/29



Product Specification

G185HAN01.0

AUO Display+

6.3 Signal Description

The module using a pair of LVDS receiver **SN75LVDS82 / SN75LVDS83**

(Texas Instruments) or compatible. LVDS is a differential signal technology for LCD interface and high speed data transfer device. Transmitter shall be SN75LVDS83(negative edge sampling) or compatible. The first LVDS port(RxOxxx) transmits odd pixels while the second LVDS port(RxExxx) transmits even pixels.

PIN #	SIGNAL NAME	DESCRIPTION
1	RXOIN0-	Negative LVDS differential data input (Odd data)
2	RXOIN0+	Positive LVDS differential data input (Odd data)
3	RXOIN1-	Negative LVDS differential data input (Odd data)
4	RXOIN1+	Positive LVDS differential data input (Odd data)
5	RXOIN2-	Negative LVDS differential data input (Odd data, H-Sync,V-Sync,DSPTMG)
6	RXOIN2+	Positive LVDS differential data input (Odd data, H-Sync,V-Sync,DSPTMG)
7	GND	Power Ground
8	RXOCLKIN-	Negative LVDS differential clock input (Odd clock)
9	RXOCLKIN+	Positive LVDS differential clock input (Odd clock)
10	RXOIN3-	Negative LVDS differential data input (Odd data)
11	RXOIN3+	Positive LVDS differential data input (Odd data)
12	RXEIN0-	Negative LVDS differential data input (Even data)
13	RXEIN0+	Positive LVDS differential data input (Even data)
14	GND	Power Ground
15	RXEIN1-	Negative LVDS differential data input (Even data)
16	RXEIN1+	Positive LVDS differential data input (Even data)
17	GND	Power Ground
18	RXEIN2-	Negative LVDS differential data input (Even data)
19	RXEIN2+	Positive LVDS differential data input (Even data)
20	RXECLKIN-	Negative LVDS differential clock input (Even clock)
21	RXECLKIN+	Positive LVDS differential clock input (Even clock)
22	RXEIN3-	Negative LVDS differential data input (Even data)
23	RXEIN3+	Positive LVDS differential data input (Even data)
24	GND	Power GND
25	NC	NC
26	NC	NC
27	NC	NC
28	VDD	+5.0V Power Supply
29	VDD	+5.0V Power Supply
30	VDD	+5.0V Power Supply

Note1: Start from left side


G185HAN01.0. ver. 0.2



AUO Display+

Product Specification

G185HAN01.0

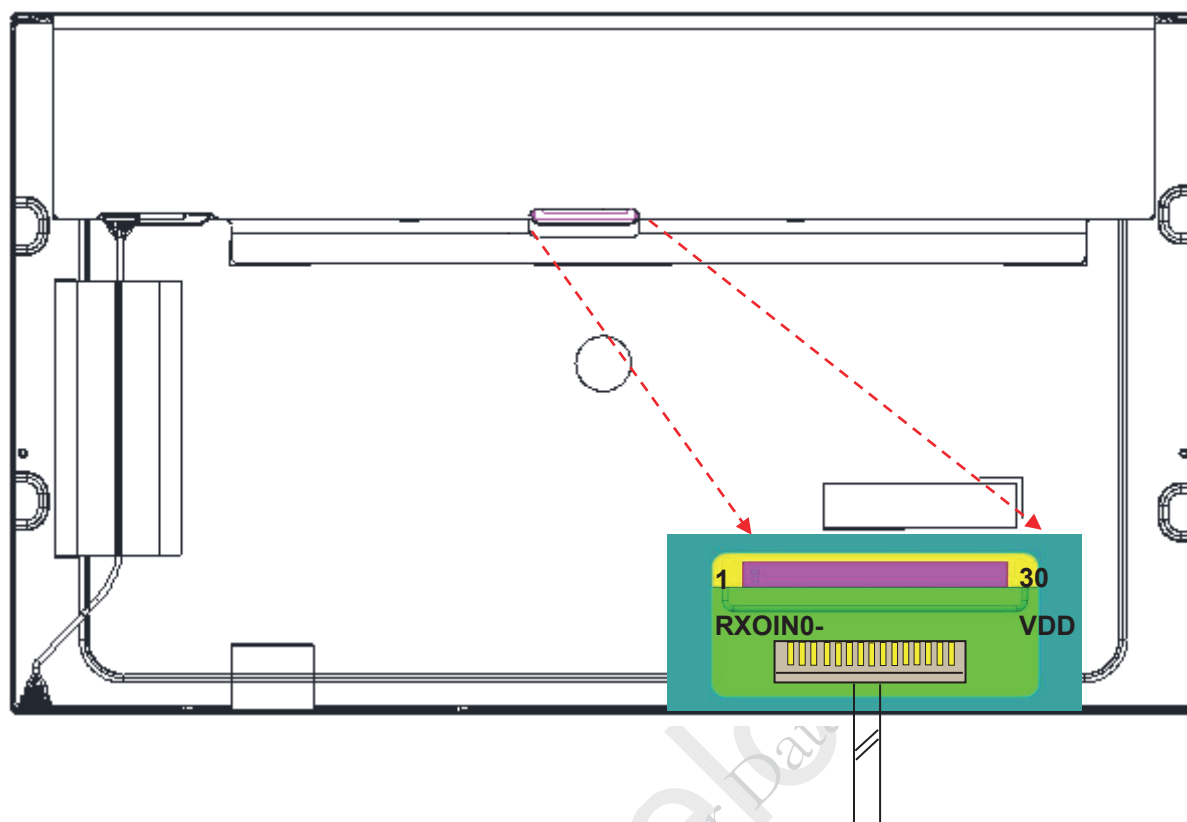

Note2: Input signals of clock shall be the same timing.

Note3: Please follow TV VESA Pin Assignment.

6.4 Timing Characteristics

G185HAN01.0. ver. 0.2

© AUO Display Plus Corporation Proprietary

17/29



AUO Display+

Product Specification

G185HAN01.0

Signal	Item	Symbol	Min	Typ	Max	Unit
V-section	Period	Tv	1090	1100	1160	Th
	Active	Tdisp(v)	1080	1080	1080	Th
	Blanking	Tbp(v)+Tfp(v)+PWvs	10	20	80	Th
H-section	Period	Th	1000	1088	1120	Tclk
	Active	Tdisp(h)	960	960	960	Tclk
	Blanking	Tbp(h)+Tfp(h)+PWhs	40	128	160	Tclk
Clock	Period	Tclk	11.76	13.89	15.38	ns
	Frequency	Freq.	60	72	87.5	MHz
Frame Rate	Frame Rate	1/Tv	50	60	75	Hz

Note 1: Only DE mode operation.

The input of Hsync & Vsync signal does not have an effect upon the LCD normal operation.

Note 2: The performance of the electro-optical characteristics may be influenced by variance of the vertical refresh rates.

Note 3: Horizontal period should be even.

G185HAN01.0. ver. 0.2

© AUO Display Plus Corporation Proprietary


18/29



Product Specification

G185HAN01.0

AUO Display+ 6.5 Timing diagram

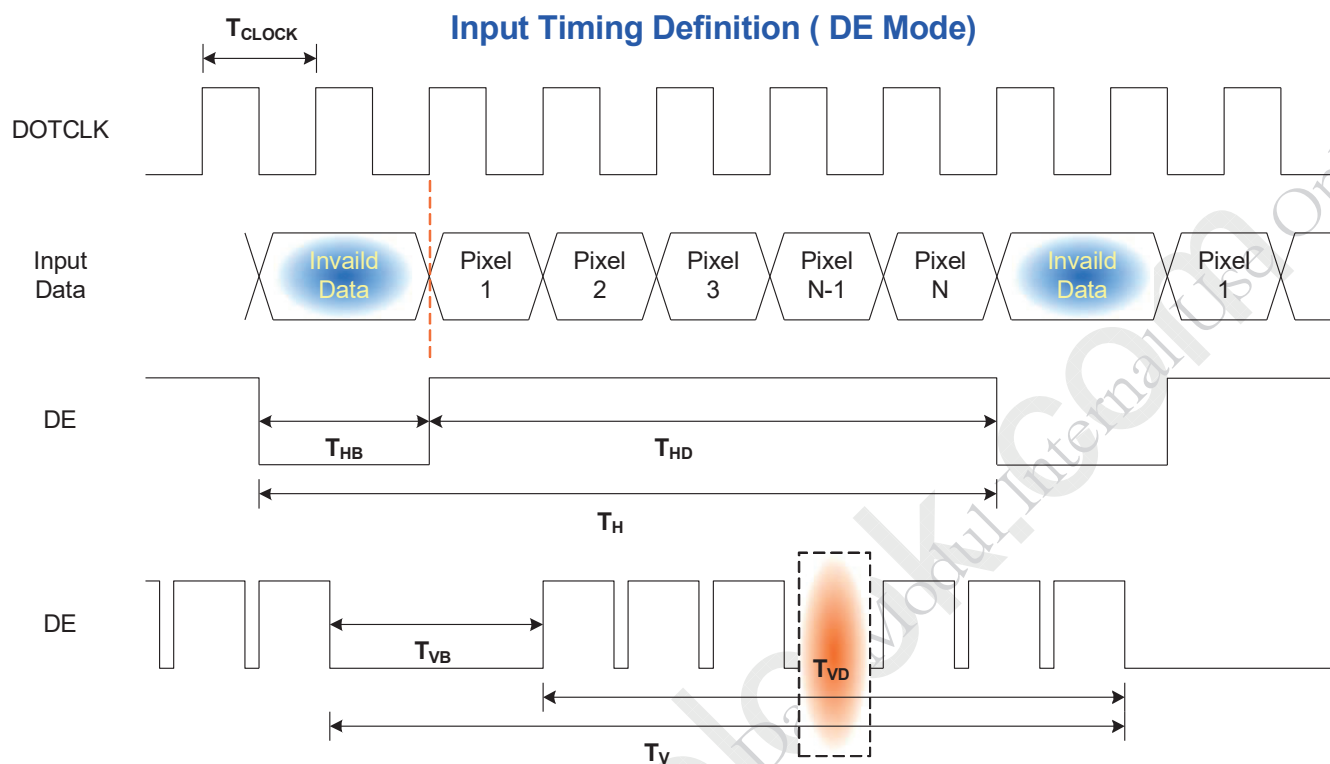

G185HAN01.0. ver. 0.2




Product Specification

G185HAN01.0

AUO Display+

6.6 Power ON/OFF Sequence

VDD power and LED on/off sequence are as follows. Interface signals are also shown in the chart. Signals from any system shall be Hi-Z state or low level when VDD is off.

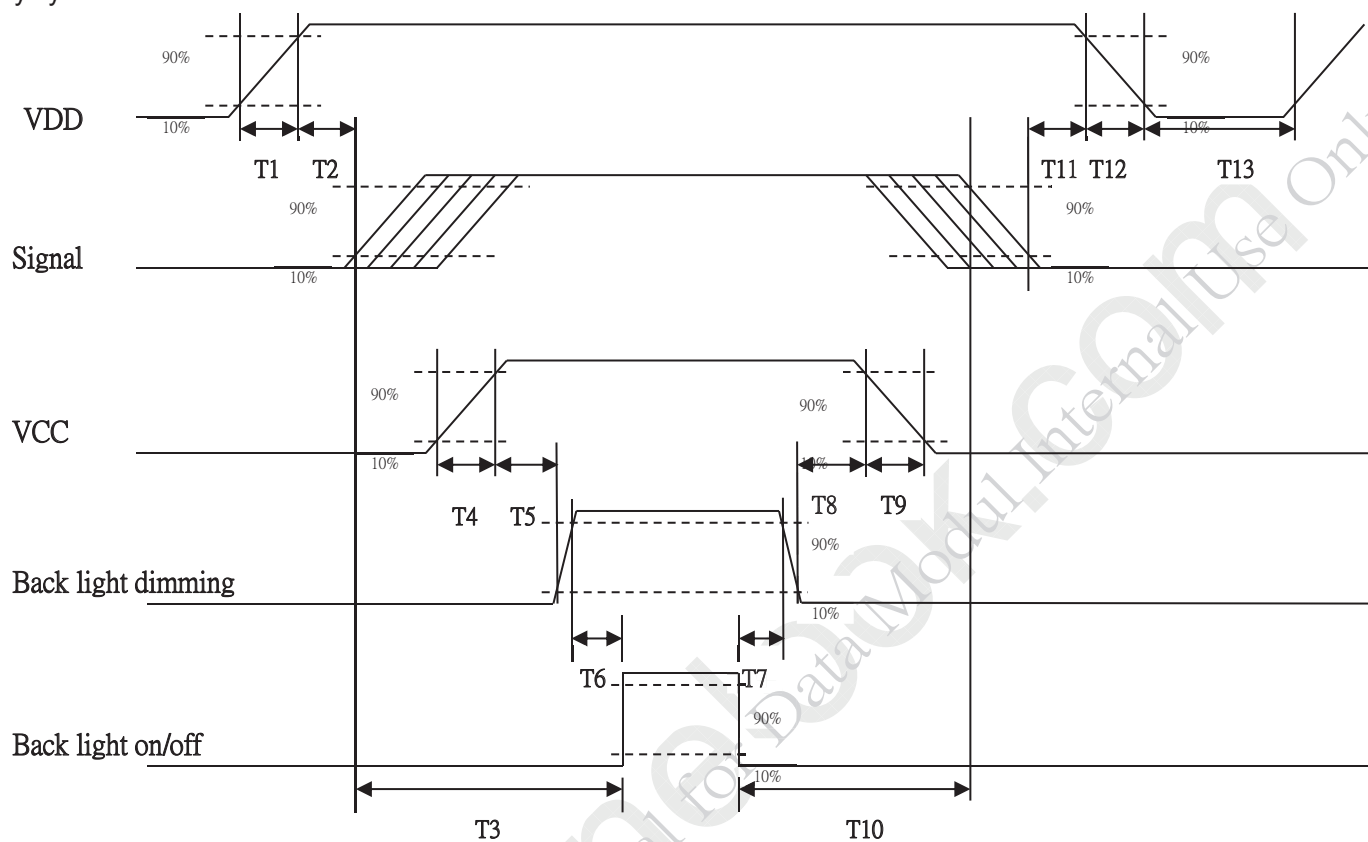**Power ON/OFF sequence timing**

Parameter	Value			Units
	Min.	Typ.	Max.	
T1	0.5	-	10	[ms]
T2	0	40	50	[ms]
T3	200	-	-	[ms]
T4	0.5	-	10	[ms]
T5	10	-	-	[ms]
T6	10	-	-	[ms]
T7	0	-	-	[ms]
T8	10	-	-	[ms]
T9	-	-	10	[ms]
T10	110	-	-	[ms]
T11	0.5	16	50	[ms]
T12	-	-	100	[ms]
T13	1000	-	-	[ms]

G185HAN01.0. ver. 0.2



Product Specification

G185HAN01.0

AUO Display+

7.0 Connector & Pin Assignment

Physical interface is described as for the connector on module. These connectors are capable of accommodating the following signals and will be following components.

7.1 TFT LCD Module

Connector Name / Designation	Interface Connector / Interface card
Manufacturer	JAE
Type Part Number	FI-XB30SSRLA-HF-16-R3500 (JAE)
Mating Housing Part Number	FI-X30HL or FI-X30C2L-NPB

7.1.1 Pin Assignment

Pin#	Signal Name	Pin#	Signal Name
1	RxOIN0-	2	RxOIN0+
3	RxOIN1-	4	RxOIN1+
5	RxOIN2-	6	RxOIN2+
7	VSS	8	RxOCLKIN-
9	RxOCLKIN+	10	RxOIN3-
11	RxOIN3+	12	RxEIN0-
13	RxEIN0+	14	VSS
15	RxEIN1-	16	RxEIN1+
17	VSS	18	RxEIN2-
19	RxEIN2+	20	RxECLKIN-
21	RxECLKIN+	22	RxEIN3-
23	RxEIN3+	24	VSS
25	NC	26	NC
27	NC	28	VCC
29	VCC	30	VCC

7.2 LED Backlight Unit: LED Driver Connector

Connector Name / Designation	LED Connector
Manufacturer	STM or compatible
Connector Model Number	MSB24038P5D or compatible
Mating Connector Model Number	P24038P5 or compatible

G185HAN01.0. ver. 0.2




Product Specification

G185HAN01.0

AUO Display+

7.3 LED Driver Connector Pin Assignment

Pin#	Symbol	Signal Name
1	VCC	12V
2	GND	GND
3	Enable	5V-On / 0V-Off
4	Dimming	PWM Dimming
5	NC	NC

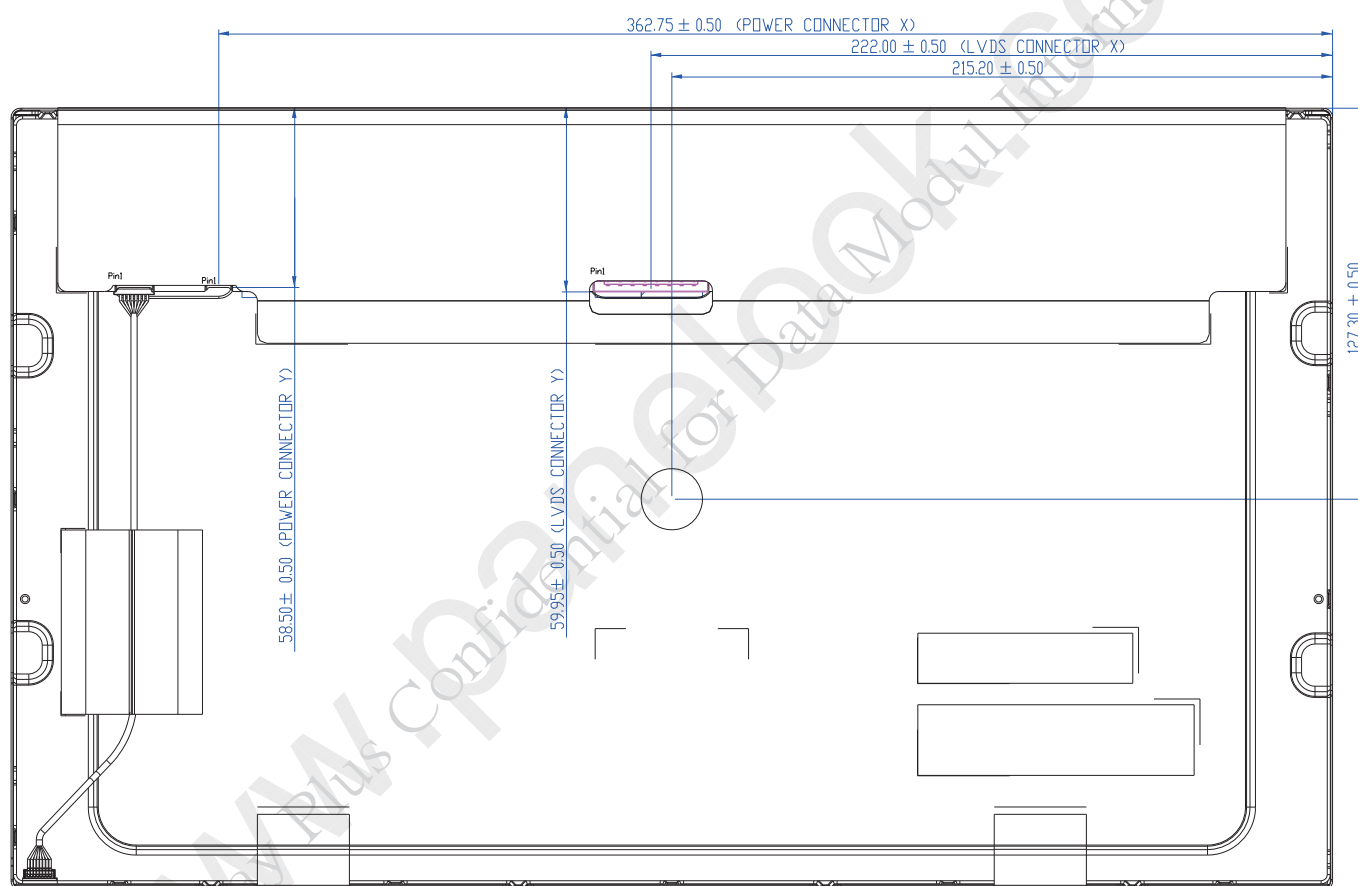

G185HAN01.0. ver. 0.2



Product Specification

G185HAN01.0

AUO Display+

8.0 Reliability Test

Environment test conditions are listed as following table.

Items	Required Condition	Note
Temperature Humidity Bias (THB)	Ta= 50°C, 80%RH, 300hours	
High Temperature Operation (HTO)	Ta= 80°C, 300hours	3
Low Temperature Operation (LTO)	Ta= -30°C, 300hours	
High Temperature Storage (HTS)	Ta= 80°C, 300hours	
Low Temperature Storage (LTS)	Ta= -30°C, 300hours	
Vibration Test (Non-operation)	Acceleration: 1.5 G Wave: Random Frequency: 10 - 200 Hz Sweep: 30 Minutes each Axis (X, Y, Z)	
Shock Test (Non-operation)	Acceleration: 50 G Wave: Half-sine Active Time: 20 ms Direction: ±X, ±Y, ±Z (one time for each Axis)	
Drop Test	Height: 45.7 cm, package test	
Thermal Shock Test (TST)	-20°C /30min, 60°C /30min, 100 cycles	1
On/Off Test	On/10sec, Off/10sec, 30,000 cycles	
ESD (Electro Static Discharge)	Contact Discharge: ± 8KV, 150pF(330Ω) 1sec, 8 points, 25 times/ point.	2
	Air Discharge: ± 15KV, 150pF(330Ω) 1sec 8 points, 25 times/ point.	

Note 1: The TFT-LCD module will not sustain damage after being subjected to 100 cycles of rapid temperature change. A cycle of rapid temperature change consists of varying the temperature from -20°C to 60°C, and back again. Power is not applied during the test. After temperature cycling, the unit is placed in normal room ambient for at least 4 hours before power on.

Note 2: According to EN61000-4-2 , ESD class B: Some performance degradation allowed. No data lost. Self-recoverable. No hardware failures.

Note 3: No function occurs Mura shall be ignored after high temperature reliability test.

G185HAN01.0. ver. 0.2



Product Specification


G185HAN01.0

AUO Display+

9.0 Shipping Label & Packaging

9.1 Shipping Label

The label is on the panel as shown below:

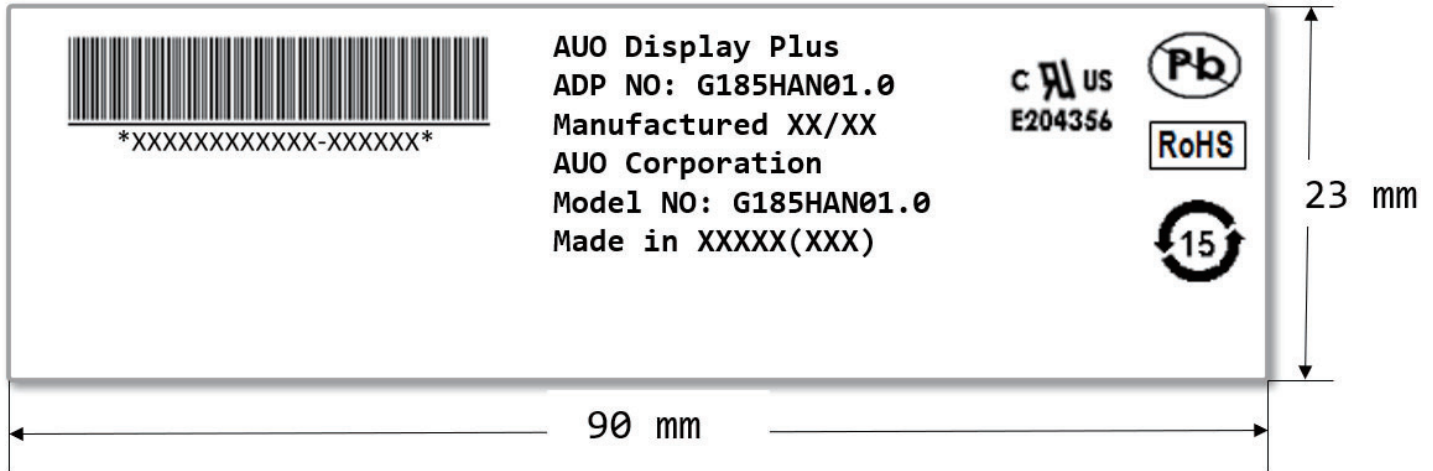

Note 1: For Pb Free products, AUO will add  for identification.

Note 2: For RoHS compatible products, AUO will add  for identification.

Note 3: For China RoHS compatible products, AUO will add  for identification.

Note 4: The Green Mark will be presented only when the green documents have been ready by AUO Internal Green Team.

G185HAN01.0. ver. 0.2

© AUO Display Plus Corporation Proprietary

24/29




Product Specification

G185HAN01.0

AUO Display+

9.2 Packaging

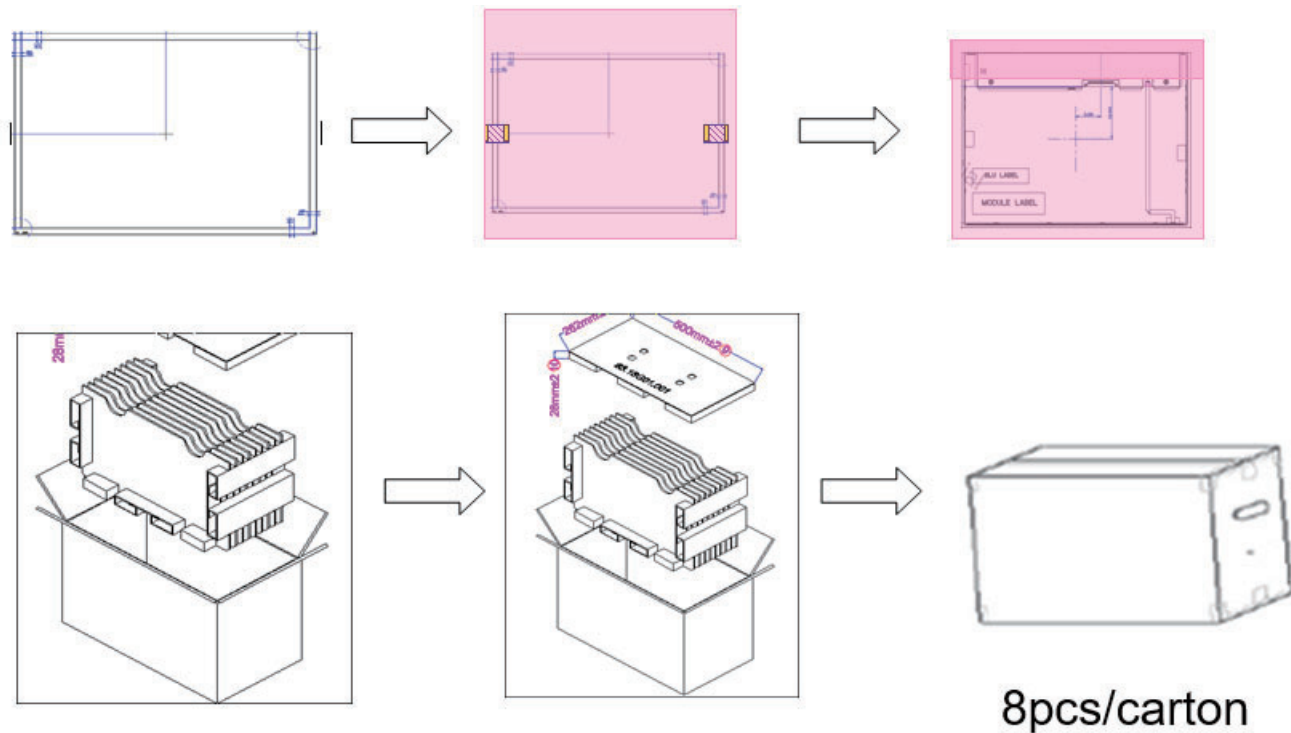

Max capacity : 8 TFT-LCD module per carton

Max weight: 17 kg per carton

Outside dimension of carton: 520mm(L)* 280mm(W)*352mm(H)

Pallet size: 1150 mm *1100 mm * 132mm

Box stacked

By air_max : (2 *4) *4 layers , one pallet put 32 boxes , total 256pcs module

By sea_max : (2 *4) *4 layers + (2 *4) *1 layers , two pallet put 40 boxes , total 320pcs module

By sea_HQ_max : (2 *4) *4 layers+(2 *4) *2 layers, two pallet put 48 boxes, total 384pcs module

G185HAN01.0. ver. 0.2

© AUO Display Plus Corporation Proprietary

25/29




AUO Display+

9.3 Palletizing

Product Specification

G185HAN01.0

MODULE/CARTON	8	8	8	8
CARTON/LAYER	8	8	8	8
LAYER/PALLET	4	4+1	4+2	4+2
MODULE/PALLET	256	320	384	384
CARTON SIZE(MM)	520(L)*280(W)*352(H)	520(L)*280(W)*352(H)	520(L)*280(W)*352(H)	520(L)*280(W)*352(H)
PALLET SIZE(MM)	1140(L)*1060(W)*140(H)	1140(L)*1060(W)*140(H)	1140(L)*1060(W)*140(H)	1140(L)*1060(W)*140(H)
TOTAL PALLET HEIGHT(MM)	1548	2040	2392	2392
TOTAL PALLET WEIGHT(KG)	559	710	846	846

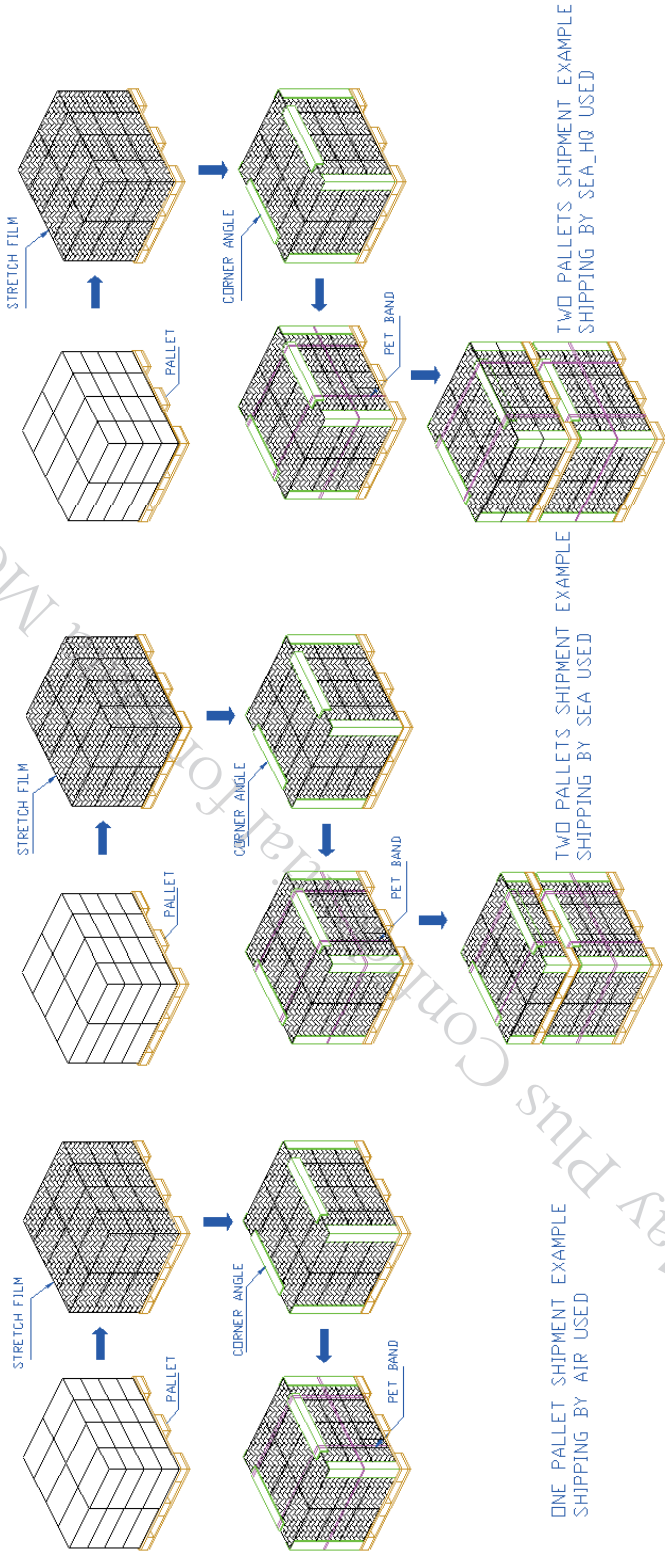

G185HAN01.0. ver. 0.2

26/29


© AUO Display Plus Corporation Proprietary



Product Specification

G185HAN01.0

10.0 Mechanical Characteristics

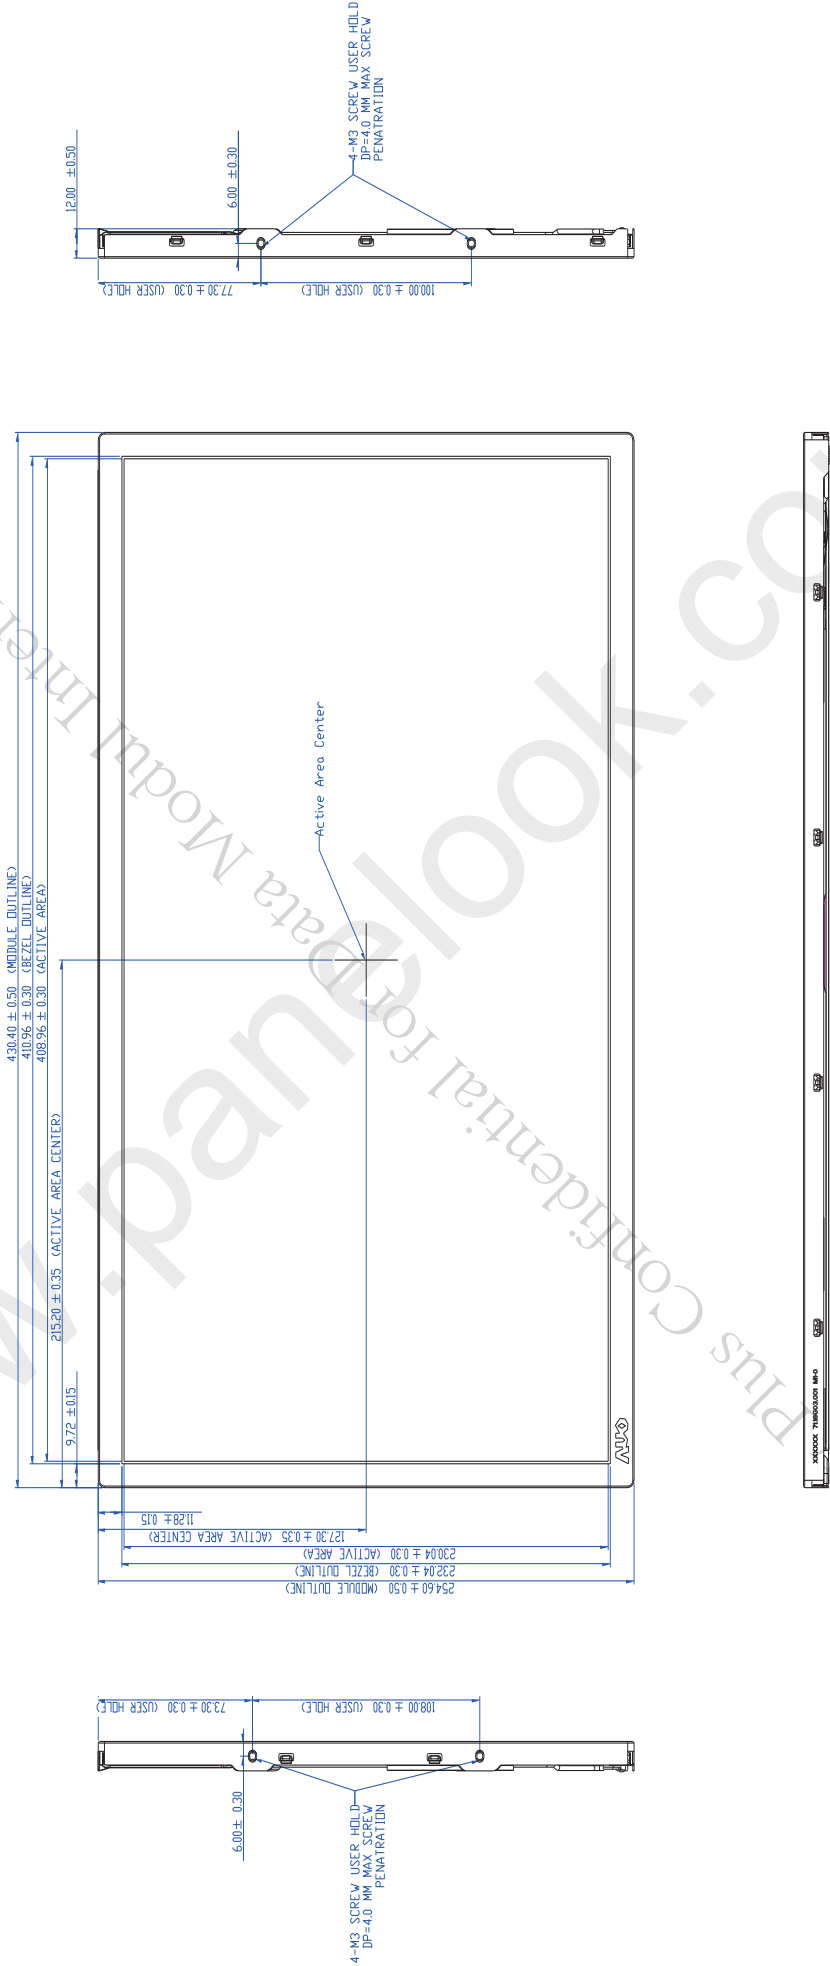


- NOTES:
1. PRELIMINARY DRAWING FOR REFERENCE ONLY.
 2. THE DIMENSION EXCLUDES DEFORMATION.
 3. THE DIMENSION OF THE USER HOLE SHOULD BE WITHIN 4 KGF-CM AND RE-SCREW 10 TIMES.
 4. THE DIMENSION OF THE USER HOLE SHOULD BE WITHIN 4 KGF-CM AND RE-SCREW 10 TIMES.
 5. MODULE THICKNESS SHOULD BE 12.5mm MAX.
 6. USER HOLE SCREW PENETRATION 4.0mm MAX.



Product Specification

G185HAN01.0

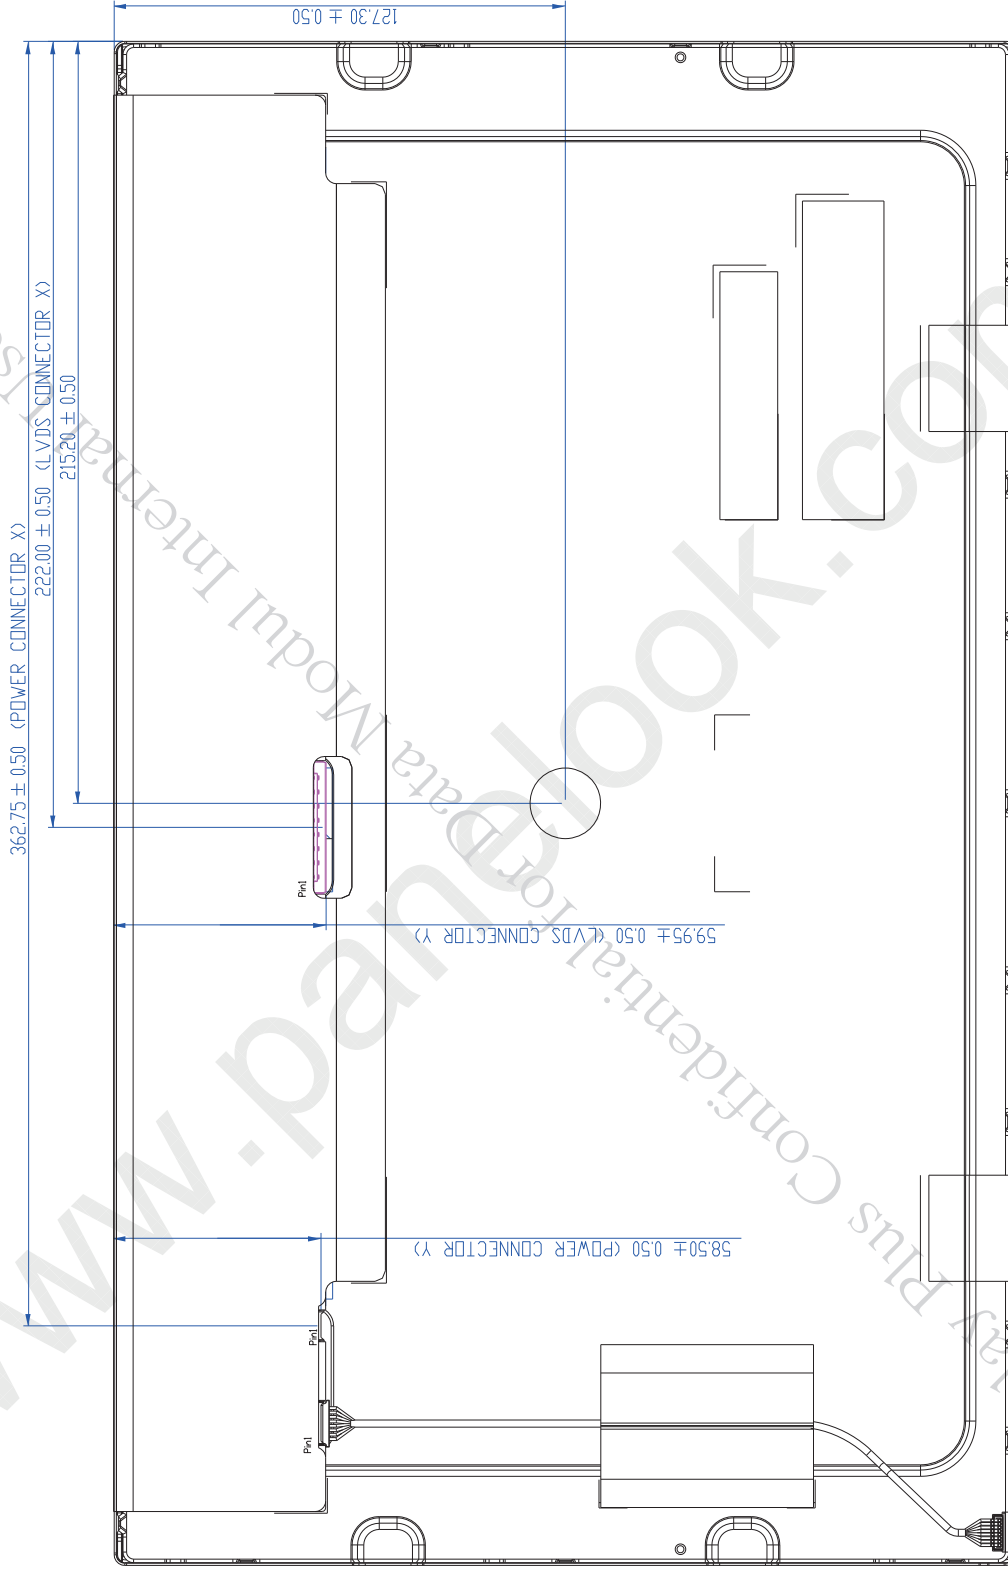

G185HAN01.0. ver. 0.2

28/29

© AUO Display Plus Corporation Proprietary



Product Specification

G185HAN01.0

AUO Display+

11 Safety

11.1 Keen Edge Requirements

There will be no sharp edges or comers on the display assembly that could cause injury.

11.2 Materials

11.2.1 Toxicity

There will be no carcinogenic materials used anywhere in the display module. If toxic materials are used, they will be reviewed and approved by the responsible AUO toxicologist.

11.2.2 Flammability

The printed circuit board will be made from material rated 94-V1 or better. The actual UL flammability rating will be printed on the printed circuit board.

11.3 Capacitors

If any polarized capacitors are used in the display assembly, provisions will be made to keep them from being inserted backwards.

11.4 International Safety Standard Compliance

The TFT-LCD module will satisfy all requirements for compliance to:IEC/UL 62368-1