



Product Specification

G230HAN01.1

AU OPTRONICS CORPORATION

☐ Preliminary Specification☒ Final Specification

Module	23.0" FHD Color TFT-LCD
Model Name	G230HAN01.1

<table><tr><td>Customer</td><td>Date</td></tr><tr><td>_____</td><td>_____</td></tr><tr><td>Approved by</td><td></td></tr><tr><td>_____</td><td>_____</td></tr></table>	Customer	Date	_____	_____	Approved by		_____	_____	<table><tr><td>Checked & Approved by</td><td>Date</td></tr><tr><td><i>Crystal Hsieh</i></td><td><u>2017.04.10</u></td></tr><tr><td>Prepared by</td><td></td></tr><tr><td><i>Jimmy Tsai</i></td><td><u>2017.04.10</u></td></tr></table>	Checked & Approved by	Date	<i>Crystal Hsieh</i>	<u>2017.04.10</u>	Prepared by		<i>Jimmy Tsai</i>	<u>2017.04.10</u>
Customer	Date																
_____	_____																
Approved by																	
_____	_____																
Checked & Approved by	Date																
<i>Crystal Hsieh</i>	<u>2017.04.10</u>																
Prepared by																	
<i>Jimmy Tsai</i>	<u>2017.04.10</u>																
Customer's sign back page	General Display Business Unit / AU Optronics corporation																



Product Specification

G230HAN01.1

AU OPTRONICS CORPORATION

Record of Revision

Version & Date	Page	Old Description	New Description																																																																																																																																														
V0.1 & 2015/10/06	All	Frist Edition																																																																																																																																															
V0.2 & 2016/04/11	6	<table><tr><td>Luminance Uniformity</td><td>[%]</td><td>9 Points</td><td>75</td><td>85</td></tr></table>	Luminance Uniformity	[%]	9 Points	75	85	<table><tr><td>Luminance Uniformity</td><td>[%]</td><td>9 Points</td><td>75</td><td>90</td></tr></table>	Luminance Uniformity	[%]	9 Points	75	90																																																																																																																																				
Luminance Uniformity	[%]	9 Points	75	85																																																																																																																																													
Luminance Uniformity	[%]	9 Points	75	90																																																																																																																																													
	10	Old Block Diagram	Updated Black Diagram																																																																																																																																														
	11	With Temp-Humility drawing	Without Temp-Humility drawing																																																																																																																																														
	13	<table><tr><td>LED Life Time</td><td>30,000</td><td>h</td><td>H₅₀</td><td>I₀=60 mA, Ta=25°C</td></tr></table>	LED Life Time	30,000	h	H ₅₀	I ₀ =60 mA, Ta=25°C	<table><tr><td>LTLED</td><td>LED Life Time</td><td>30,000</td><td>h</td><td>H₅₀</td><td>I₀=60 mA, Ta=25°C</td></tr></table>	LTLED	LED Life Time	30,000	h	H ₅₀	I ₀ =60 mA, Ta=25°C																																																																																																																																			
LED Life Time	30,000	h	H ₅₀	I ₀ =60 mA, Ta=25°C																																																																																																																																													
LTLED	LED Life Time	30,000	h	H ₅₀	I ₀ =60 mA, Ta=25°C																																																																																																																																												
	18	<table><tr><th>Signal</th><th>Item</th><th>Symbol</th><th>Min</th><th>Typ</th><th>Max</th><th>Unit</th></tr><tr><td rowspan="3">Vertical Section</td><td>Period</td><td>T_v</td><td>1090</td><td>1100</td><td>1160</td><td>Th</td></tr><tr><td>Active</td><td>T_{disp(v)}</td><td>1080</td><td>1080</td><td>1080</td><td>Th</td></tr><tr><td>Blanking</td><td>T_{bp(v)}+T_{bp(v)}+P_{W_{bp}}</td><td>10</td><td>20</td><td>80</td><td>Th</td></tr><tr><td rowspan="3">Horizontal Section</td><td>Period</td><td>T_h</td><td>1000</td><td>1080</td><td>1120</td><td>Tclk</td></tr><tr><td>Active</td><td>T_{disp(h)}</td><td>960</td><td>960</td><td>960</td><td>Tclk</td></tr><tr><td>Blanking</td><td>T_{bp(h)}+T_{bp(h)}+P_{W_{bp}}</td><td>40</td><td>128</td><td>160</td><td>Tclk</td></tr><tr><td rowspan="2">Clock</td><td>Period</td><td>T_{clk}</td><td>11.75</td><td>13.85</td><td>15.38</td><td>ns</td></tr><tr><td>Frequency</td><td>F_{req}</td><td>60</td><td>72</td><td>87.5</td><td>MHz</td></tr><tr><td rowspan="2">Frame Rate</td><td>Frequency</td><td>1/T_v</td><td>50</td><td>60</td><td>75</td><td>Hz</td></tr><tr><td>Frequency</td><td>F_h</td><td>45</td><td>65.25</td><td>80</td><td>kHz</td></tr></table>	Signal	Item	Symbol	Min	Typ	Max	Unit	Vertical Section	Period	T _v	1090	1100	1160	Th	Active	T _{disp(v)}	1080	1080	1080	Th	Blanking	T _{bp(v)} +T _{bp(v)} +P _{W_{bp}}	10	20	80	Th	Horizontal Section	Period	T _h	1000	1080	1120	Tclk	Active	T _{disp(h)}	960	960	960	Tclk	Blanking	T _{bp(h)} +T _{bp(h)} +P _{W_{bp}}	40	128	160	Tclk	Clock	Period	T _{clk}	11.75	13.85	15.38	ns	Frequency	F _{req}	60	72	87.5	MHz	Frame Rate	Frequency	1/T _v	50	60	75	Hz	Frequency	F _h	45	65.25	80	kHz	<table><tr><th>Signal</th><th>Item</th><th>Symbol</th><th>Min</th><th>Typ</th><th>Max</th><th>Unit</th></tr><tr><td rowspan="3">Vertical Section</td><td>Period</td><td>T_v</td><td>1090</td><td>1100</td><td>1200</td><td>Th</td></tr><tr><td>Active</td><td>T_{disp(v)}</td><td>1080</td><td>1080</td><td>1080</td><td>Th</td></tr><tr><td>Blanking</td><td>T_{bp(v)}+T_{bp(v)}+P_{W_{bp}}</td><td>10</td><td>20</td><td>120</td><td>Th</td></tr><tr><td rowspan="3">Horizontal Section</td><td>Period</td><td>T_h</td><td>1000</td><td>1080</td><td>1100</td><td>Tclk</td></tr><tr><td>Active</td><td>T_{disp(h)}</td><td>960</td><td>960</td><td>960</td><td>Tclk</td></tr><tr><td>Blanking</td><td>T_{bp(h)}+T_{bp(h)}+P_{W_{bp}}</td><td>40</td><td>128</td><td>240</td><td>Tclk</td></tr><tr><td rowspan="2">Clock</td><td>Period</td><td>T_{clk}</td><td>11.75</td><td>13.85</td><td>15.38</td><td>ns</td></tr><tr><td>Frequency</td><td>F_{req}</td><td>60</td><td>72</td><td>87.5</td><td>MHz</td></tr><tr><td rowspan="2">Frame Rate</td><td>Frequency</td><td>1/T_v</td><td>45</td><td>60</td><td>75</td><td>Hz</td></tr><tr><td>Frequency</td><td>F_h</td><td>45</td><td>65.25</td><td>80</td><td>kHz</td></tr></table>	Signal	Item	Symbol	Min	Typ	Max	Unit	Vertical Section	Period	T _v	1090	1100	1200	Th	Active	T _{disp(v)}	1080	1080	1080	Th	Blanking	T _{bp(v)} +T _{bp(v)} +P _{W_{bp}}	10	20	120	Th	Horizontal Section	Period	T _h	1000	1080	1100	Tclk	Active	T _{disp(h)}	960	960	960	Tclk	Blanking	T _{bp(h)} +T _{bp(h)} +P _{W_{bp}}	40	128	240	Tclk	Clock	Period	T _{clk}	11.75	13.85	15.38	ns	Frequency	F _{req}	60	72	87.5	MHz	Frame Rate	Frequency	1/T _v	45	60	75	Hz	Frequency	F _h	45	65.25	80	kHz
Signal	Item	Symbol	Min	Typ	Max	Unit																																																																																																																																											
Vertical Section	Period	T _v	1090	1100	1160	Th																																																																																																																																											
	Active	T _{disp(v)}	1080	1080	1080	Th																																																																																																																																											
	Blanking	T _{bp(v)} +T _{bp(v)} +P _{W_{bp}}	10	20	80	Th																																																																																																																																											
Horizontal Section	Period	T _h	1000	1080	1120	Tclk																																																																																																																																											
	Active	T _{disp(h)}	960	960	960	Tclk																																																																																																																																											
	Blanking	T _{bp(h)} +T _{bp(h)} +P _{W_{bp}}	40	128	160	Tclk																																																																																																																																											
Clock	Period	T _{clk}	11.75	13.85	15.38	ns																																																																																																																																											
	Frequency	F _{req}	60	72	87.5	MHz																																																																																																																																											
Frame Rate	Frequency	1/T _v	50	60	75	Hz																																																																																																																																											
	Frequency	F _h	45	65.25	80	kHz																																																																																																																																											
Signal	Item	Symbol	Min	Typ	Max	Unit																																																																																																																																											
Vertical Section	Period	T _v	1090	1100	1200	Th																																																																																																																																											
	Active	T _{disp(v)}	1080	1080	1080	Th																																																																																																																																											
	Blanking	T _{bp(v)} +T _{bp(v)} +P _{W_{bp}}	10	20	120	Th																																																																																																																																											
Horizontal Section	Period	T _h	1000	1080	1100	Tclk																																																																																																																																											
	Active	T _{disp(h)}	960	960	960	Tclk																																																																																																																																											
	Blanking	T _{bp(h)} +T _{bp(h)} +P _{W_{bp}}	40	128	240	Tclk																																																																																																																																											
Clock	Period	T _{clk}	11.75	13.85	15.38	ns																																																																																																																																											
	Frequency	F _{req}	60	72	87.5	MHz																																																																																																																																											
Frame Rate	Frequency	1/T _v	45	60	75	Hz																																																																																																																																											
	Frequency	F _h	45	65.25	80	kHz																																																																																																																																											
	19	<table><tr><th rowspan="2">Parameter</th><th colspan="3">Value</th><th rowspan="2">Units</th></tr><tr><th>Min</th><th>Typ</th><th>Max</th></tr><tr><td>T1</td><td>0.5</td><td>---</td><td>10</td><td rowspan="5">ms</td></tr><tr><td>T2</td><td>30</td><td>40</td><td>50</td></tr><tr><td>T11</td><td>0</td><td>16</td><td>50</td></tr><tr><td>T12</td><td>---</td><td>---</td><td>10</td></tr><tr><td>T13</td><td>1000</td><td>---</td><td>---</td></tr></table>	Parameter	Value			Units	Min	Typ	Max	T1	0.5	---	10	ms	T2	30	40	50	T11	0	16	50	T12	---	---	10	T13	1000	---	---	<table><tr><th rowspan="2">Parameter</th><th colspan="3">Value</th><th rowspan="2">Units</th></tr><tr><th>Min</th><th>Typ</th><th>Max</th></tr><tr><td>T1</td><td>0.5</td><td>---</td><td>10</td><td rowspan="5">ms</td></tr><tr><td>T2</td><td>30</td><td>40</td><td>50</td></tr><tr><td>T3</td><td>0</td><td>16</td><td>50</td></tr><tr><td>T4</td><td>---</td><td>---</td><td>10</td></tr><tr><td>T5</td><td>1000</td><td>---</td><td>---</td></tr></table>	Parameter	Value			Units	Min	Typ	Max	T1	0.5	---	10	ms	T2	30	40	50	T3	0	16	50	T4	---	---	10	T5	1000	---	---																																																																																				
Parameter	Value			Units																																																																																																																																													
	Min	Typ	Max																																																																																																																																														
T1	0.5	---	10	ms																																																																																																																																													
T2	30	40	50																																																																																																																																														
T11	0	16	50																																																																																																																																														
T12	---	---	10																																																																																																																																														
T13	1000	---	---																																																																																																																																														
Parameter	Value			Units																																																																																																																																													
	Min	Typ	Max																																																																																																																																														
T1	0.5	---	10	ms																																																																																																																																													
T2	30	40	50																																																																																																																																														
T3	0	16	50																																																																																																																																														
T4	---	---	10																																																																																																																																														
T5	1000	---	---																																																																																																																																														
	21	<table><tr><th colspan="2">7.2.1 Connector</th></tr><tr><td>Connector Name / Designation</td><td>Light Bar Connector</td></tr><tr><td>Manufacturer</td><td>E&T</td></tr><tr><td>Type</td><td>7182K-F06N-003 (6 Pin FFC Type)</td></tr></table>	7.2.1 Connector		Connector Name / Designation	Light Bar Connector	Manufacturer	E&T	Type	7182K-F06N-003 (6 Pin FFC Type)	<table><tr><th colspan="2">7.2.1 Connector</th></tr><tr><td>Connector Name / Designation</td><td>Light Bar Connector</td></tr><tr><td>Manufacturer</td><td>E&T</td></tr><tr><td>Type</td><td>7182K-F06N-001 (6 Pin FFC Type)</td></tr></table>	7.2.1 Connector		Connector Name / Designation	Light Bar Connector	Manufacturer	E&T	Type	7182K-F06N-001 (6 Pin FFC Type)																																																																																																																														
7.2.1 Connector																																																																																																																																																	
Connector Name / Designation	Light Bar Connector																																																																																																																																																
Manufacturer	E&T																																																																																																																																																
Type	7182K-F06N-003 (6 Pin FFC Type)																																																																																																																																																
7.2.1 Connector																																																																																																																																																	
Connector Name / Designation	Light Bar Connector																																																																																																																																																
Manufacturer	E&T																																																																																																																																																
Type	7182K-F06N-001 (6 Pin FFC Type)																																																																																																																																																
V0.3 & 2017/01/11	6	<table><tr><th rowspan="2">Color / Chromaticity Coordinates (CIE)</th><th rowspan="2"></th><th rowspan="2">Red x_r Red y_r Green x_g Green y_g Blue x_b Blue y_b White x_w White y_w</th><th rowspan="2">TBD TBD TBD TBD TBD TBD 0.313 0.326</th><th rowspan="2">-0.05 +0.05</th></tr><tr></tr></table>	Color / Chromaticity Coordinates (CIE)		Red x _r Red y _r Green x _g Green y _g Blue x _b Blue y _b White x _w White y _w	TBD TBD TBD TBD TBD TBD 0.313 0.326	-0.05 +0.05	<table><tr><th rowspan="2">Color / Chromaticity Coordinates (CIE)</th><th rowspan="2"></th><th rowspan="2">Red x_r Red y_r Green x_g Green y_g Blue x_b Blue y_b White x_w White y_w</th><th rowspan="2">0.643 0.339 0.306 0.607 0.155 0.060 0.313 0.329</th><th rowspan="2">-0.05 +0.05</th><th rowspan="2">3</th></tr><tr></tr></table>	Color / Chromaticity Coordinates (CIE)		Red x _r Red y _r Green x _g Green y _g Blue x _b Blue y _b White x _w White y _w	0.643 0.339 0.306 0.607 0.155 0.060 0.313 0.329	-0.05 +0.05	3																																																																																																																																			
Color / Chromaticity Coordinates (CIE)		Red x _r Red y _r Green x _g Green y _g Blue x _b Blue y _b White x _w White y _w						TBD TBD TBD TBD TBD TBD 0.313 0.326							-0.05 +0.05																																																																																																																																		
Color / Chromaticity Coordinates (CIE)		Red x _r Red y _r Green x _g Green y _g Blue x _b Blue y _b White x _w White y _w	0.643 0.339 0.306 0.607 0.155 0.060 0.313 0.329	-0.05 +0.05	3																																																																																																																																												
V1.0 & 2017/04/10	5	<table><tr><td>Power Consumption</td><td>[Watt]</td><td>19.7 (Typ)</td></tr><tr><td>Weight</td><td>[Grams]</td><td>1.600 (Typ)</td></tr></table>	Power Consumption	[Watt]	19.7 (Typ)	Weight	[Grams]	1.600 (Typ)	<table><tr><td>Power Consumption</td><td>[Watt]</td><td>22.3 W (max) (BL: 13.5 W) + Cell: 8.4 W)</td></tr><tr><td>Weight</td><td>[Grams]</td><td>1.530 (Typ) ±150g</td></tr></table>	Power Consumption	[Watt]	22.3 W (max) (BL: 13.5 W) + Cell: 8.4 W)	Weight	[Grams]	1.530 (Typ) ±150g																																																																																																																																		
Power Consumption	[Watt]	19.7 (Typ)																																																																																																																																															
Weight	[Grams]	1.600 (Typ)																																																																																																																																															
Power Consumption	[Watt]	22.3 W (max) (BL: 13.5 W) + Cell: 8.4 W)																																																																																																																																															
Weight	[Grams]	1.530 (Typ) ±150g																																																																																																																																															
	11	<table><tr><th colspan="6">4.1 Absolute Ratings of TFT LCD Module</th></tr><tr><th>Item</th><th>Symbol</th><th>Min</th><th>Max</th><th>Unit</th><th>Conditions</th></tr><tr><td>Input/CC Drive Voltage</td><td>V_{DD}</td><td>3.3</td><td>4.5</td><td>[V_{DC}]</td><td>Note 1, 2</td></tr></table>	4.1 Absolute Ratings of TFT LCD Module						Item	Symbol	Min	Max	Unit	Conditions	Input/CC Drive Voltage	V _{DD}	3.3	4.5	[V _{DC}]	Note 1, 2	<table><tr><th colspan="6">4.1 Absolute Ratings of TFT LCD Module</th></tr><tr><th>Item</th><th>Symbol</th><th>Min</th><th>Max</th><th>Unit</th><th>Conditions</th></tr><tr><td>Input/CC Drive Voltage</td><td>V_{DD}</td><td>4.5</td><td>5.5</td><td>[V_{DC}]</td><td>Note 1, 2</td></tr></table>	4.1 Absolute Ratings of TFT LCD Module						Item	Symbol	Min	Max	Unit	Conditions	Input/CC Drive Voltage	V _{DD}	4.5	5.5	[V _{DC}]	Note 1, 2																																																																																																										
4.1 Absolute Ratings of TFT LCD Module																																																																																																																																																	
Item	Symbol	Min	Max	Unit	Conditions																																																																																																																																												
Input/CC Drive Voltage	V _{DD}	3.3	4.5	[V _{DC}]	Note 1, 2																																																																																																																																												
4.1 Absolute Ratings of TFT LCD Module																																																																																																																																																	
Item	Symbol	Min	Max	Unit	Conditions																																																																																																																																												
Input/CC Drive Voltage	V _{DD}	4.5	5.5	[V _{DC}]	Note 1, 2																																																																																																																																												
	12	VDD rising time	VCC rising time																																																																																																																																														
	17	Pin1 location Drawing of connectors	Updated drawing																																																																																																																																														



Product Specification

G230HAN01.1

AU OPTRONICS CORPORATION

Contents

1. Handling Precautions	4
2. General Description	5
2.1 Display Characteristics	5
2.2 Optical Characteristics	6
3. Functional Block Diagram	10
4. Absolute Maximum Ratings	11
4.1 Absolute Ratings of TFT LCD Module	11
4.2 Absolute Ratings of Backlight Unit	11
4.3 Absolute Ratings of Environment	11
5. Electrical characteristics	12
5.1 TFT LCD Module	12
5.2 Backlight Unit	13
6. Signal Characteristic	14
6.1 Pixel Format Image	14
6.2 The Input Data Format	15
6.3 Signal Description	16
6.4 Interface Timing	18
6.5 Power ON/OFF Sequence	19
7. Connector & Pin Assignment	20
7.1 TFT LCD Module	20
7.2 Backlight Unit	21
8. Reliability Test	22
9. Shipping Label and Packaging	23
9.1 Shipping Label	23
9.2 Packaging	23
10. Mechanical Characteristic	24




Product Specification

G230HAN01.1

AU OPTRONICS CORPORATION

1. Handling Precautions

- 1) Since front polarizer is easily damaged, pay attention not to scratch it.
- 2) Be sure to turn off power supply when inserting or disconnecting from input connector.
- 3) Wipe off water drop immediately. Long contact with water may cause discoloration or spots.
- 4) When the panel surface is soiled, wipe it with absorbent cotton or other soft cloth.
- 5) Since the panel is made of glass, it may break or crack if dropped or bumped on hard surface.
- 6) Since CMOS LSI is used in this module, take care of static electricity and insure human earth when handling.
- 7) Do not open or modify the Module Assembly.
- 8) Do not press the reflector sheet at the back of the module to any directions.
- 9) In case if a Module has to be put back into the packing container slot after once it was taken out from the container, do not press the center of LED light bar edge. Instead, press at the far ends of LED light bar edge softly. Otherwise the TFT Module may be damaged.
- 10) At the insertion or removal of the Signal Interface Connector, be sure not to rotate nor tilt the Interface Connector of the TFT Module.
- 11) After installation of the TFT Module into an enclosure, do not twist nor bend the TFT Module even momentary. At designing the enclosure, it should be taken into consideration that no bending/twisting forces are applied to the TFT Module from outside. Otherwise the TFT Module may be damaged.
- 12) Small amount of materials having no flammability grade is used in the LCD module. The LCD module should be supplied by power complied with requirements of Limited Power Source (IEC60950 or UL1950), or be applied exemption.
- 13) Don't display the fixed pattern for a long time to avoid image sticking. If the fixed pattern is displayed on the screen, use a screen saver.
- 14) Avoid stressing front bezel position when doing mechanical design. This product must be installed by using mounting holes without undue such as bending or twist. Also do not add undue stress to any portion, ex: near bezel area. Bending or twist may cause this display mura or light leakage.
Recommended installing method: The plane "A" is defined from one mounting hole to other mounting holes. Plane A must be the same plane within ± 0.3 mm.

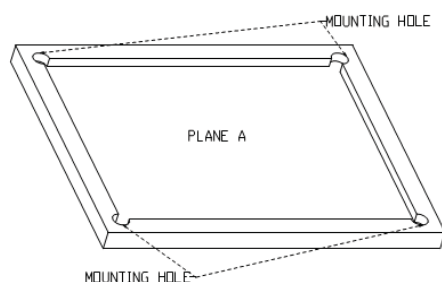

- 15) Do not operate or store in high temperature, high humidity, dewdrop atmosphere or corrosive gases.
Keep the product in packing box with antistatic package in room temperature to avoid dusts when store the product.



Product Specification

G230HAN01.1

AU OPTRONICS CORPORATION

2. General Description

G230HAN01.1 is a Color Active Matrix Liquid Crystal Display composed of a TFT-LCD panel, a driver circuit, and a backlight system. The screen format is intended to support the FHD (1920(H) x 1080(V)) screen and 16.7M colors. All input signals are 2-channel LVDS interface compatible.

2.1 Display Characteristics

The following items are characteristics summary on the table under 25 °C condition:

Items	Unit	Specifications
Screen Diagonal	[mm]	584.211 (23.0")
Active Area	[mm]	509.184 (H) x 286.416 (V)
Resolution		1920(x3) x 1080
Pixel Pitch	[mm]	0.2652 (per one triad) x 0.2652
Pixel Arrangement		R.G.B. Vertical Stripe
Display Mode		Normally Black
White Luminance	[cd/m ²]	300 (center, Typ) @60mA
Contrast Ratio		1000 : 1 (Typ)
Optical ResponseTime	[msec]	14 (Gray to Gray)
Nominal Input Voltage	[Volt]	+5.0 V (Typ)
Power Consumption	[Watt]	22.0 W (max) (BL: 15.6 (W) + Cell: 6.4 (W))
Weight	[Grams]	1,500 (Typ) +/-150g
Physical Size	[mm]	533.2 (H) x 312.0 (V) x 10.5 (D) (Typ)
Electrical Interface		Dual channel LVDS
Surface Treatment		Anti-Glare treatment
Support Color		16.7M colors (True 8 bits)
Temperature Range Operating Storage (Non-Operating)	[°C] [°C]	0 to +50 -20 to +60
RoHS Compliance		RoHS Compliance



Product Specification

G230HAN01.1

AU OPTRONICS CORPORATION

2.2 Optical Characteristics

The optical characteristics are measured under stable conditions at 25°C (Room Temperature):

Item	Unit	Conditions	Min.	Typ.	Max.	Note
Viewing Angle	[degree]	Horizontal (Right) CR = 10 (Left)	80 80	89 89	-	1
		Vertical (Up) CR = 10 (Down)	80 80	89 89	-	
Luminance Uniformity	[%]	9 Points	75	80	-	2
Optical Response Time	[msec]	Gray to Gray	-	14	25	3,4,5
		Rising	-	8	18	
		Falling	-	8	18	
		Rising + Falling	-	16	36	
Color / Chromaticity Coordinates (CIE)		Red x	-0.05	0.643	+0.05	3
		Red y		0.335		
		Green x		0.306		
		Green y		0.607		
		Blue x		0.155		
		Blue y		0.062		
		White x		0.313		
		White y		0.329		
White Luminance (At LED= 80mA)	[cd/m ²]		240	300	-	3
Contrast Ratio			600	1000	-	3
Color gamut (CG, CIE1931)	[%]			72		




Product Specification

G230HAN01.1

AU OPTRONICS CORPORATION


Note 1: Definition of viewing angle, measured by ELDIM (EZContrast 88)

Viewing angle is the measurement of contrast ratio ≥ 10 , at the screen center, over a 180° horizontal and 180° vertical range (off-normal viewing angles). The 180° viewing angle range is broken down as follows; 90° (θ) horizontal left and right and 90° (Φ) vertical, high (up) and low (down). The measurement direction is typically perpendicular to the display surface with the screen rotated about its center to develop the desired measurement viewing angle.

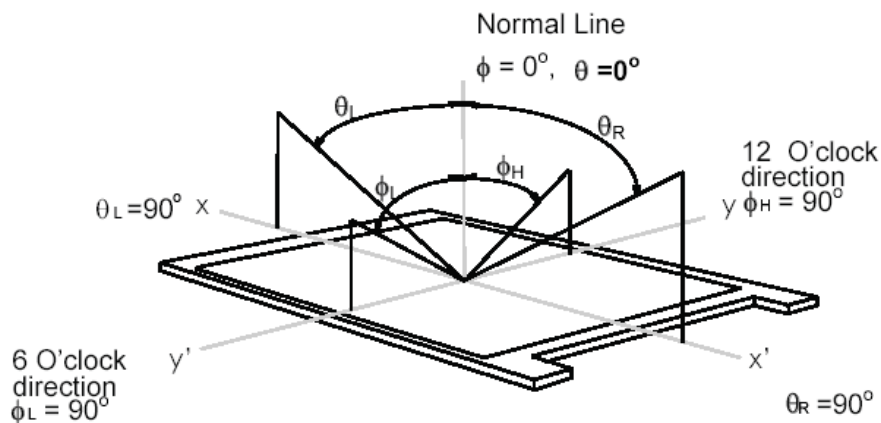

Note 2: The luminance uniformity of 9 points is defined by dividing the maximum luminance values by the minimum test point luminance. The luminance is measured by TOPCON SR-3. Detail 9 points position is as below.

$$\delta_{w9} = \frac{\text{Minimum Luminance of 9 points}}{\text{Maximum Luminance of 9 points}}$$

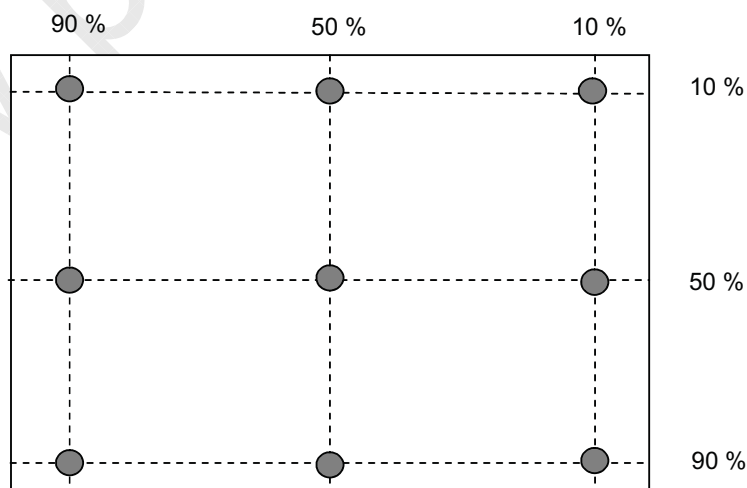




Product Specification

G230HAN01.1


AU OPTRONICS CORPORATION

Note 3: Measurement method

The LCD module should be stabilized at given temperature for 30 minutes to avoid abrupt temperature change during measuring. In order to stabilize the luminance, the measurement should be executed after lighting Backlight for 30 minutes in a stable, windless and dark room.

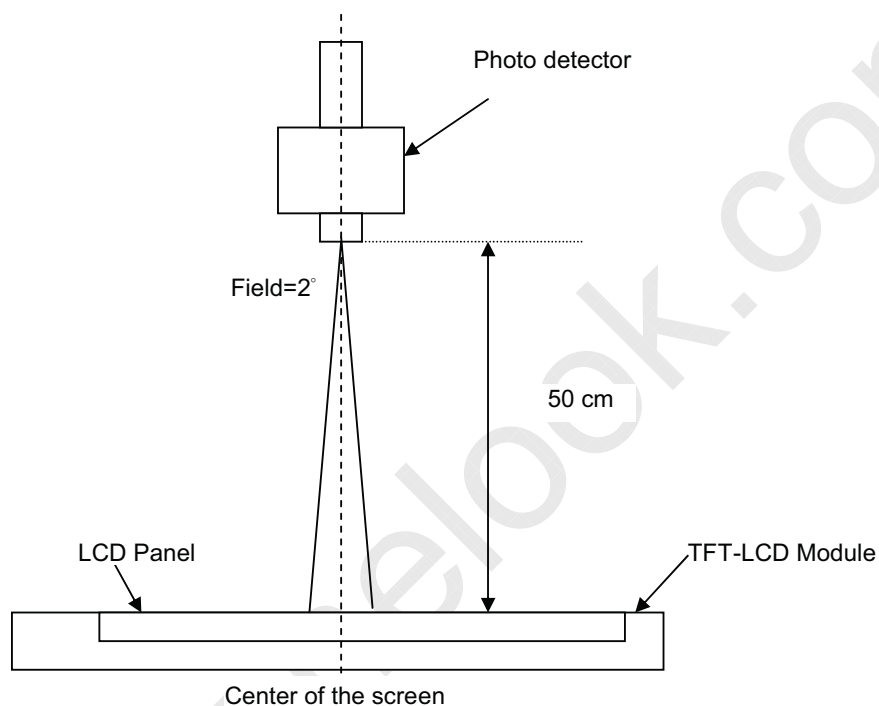

Note 4: The output signals of photo detector are measured when the input signals are changed from “Gray level A” to “Gray level B” (falling time, T_F), and from “Gray level B” to “Gray level A” (rising time, T_R), respectively. The response time is interval between the 10% and 90% of optical response. The gray to gray response time is defined as the following table.

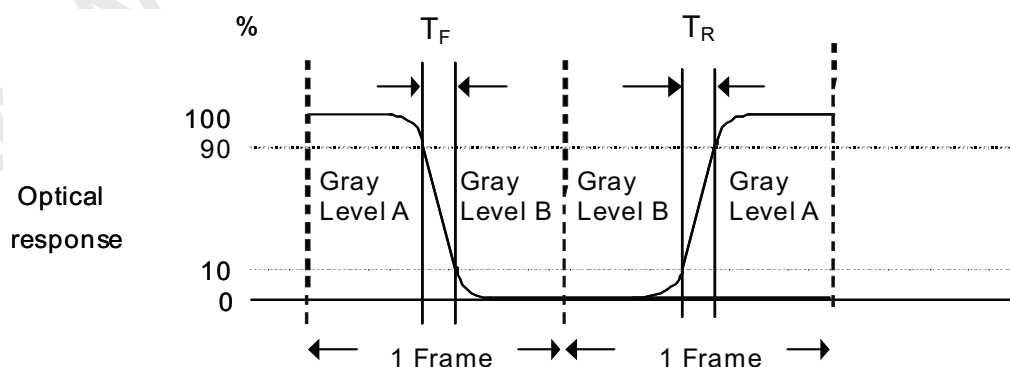



Product Specification

G230HAN01.1


AU OPTRONICS CORPORATION

Gray Level to Gray Level		Falling Time				
		G0	G63	G127	G191	G255
Rising Time	G0					
	G63					
	G127					
	G191					
	G255					

■ T_{GTG_typ} is the total average time at rising time and falling time of gray to gray.

Note 5: Definition of response time, measured by WESTAR TRD-100A

The output signals of photo detector are measured when the input signals are changed from “Full Black” to “Full White” (rising time), and from “Full White” to “Full Black” (falling time), respectively. The response time is interval between the 10% and 90% of amplitudes. Please refer to the figure as below.

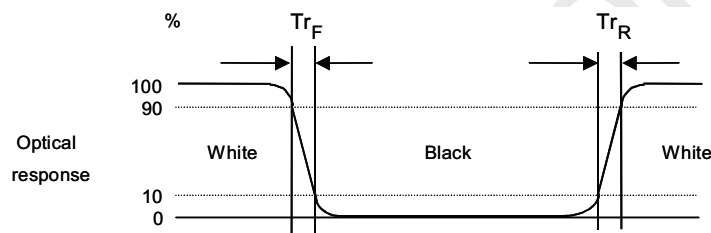




Product Specification

G230HAN01.1

AU OPTRONICS CORPORATION

3. Functional Block Diagram

The following diagram shows the functional block of the 23 inches wide Color TFT-LCD Module:

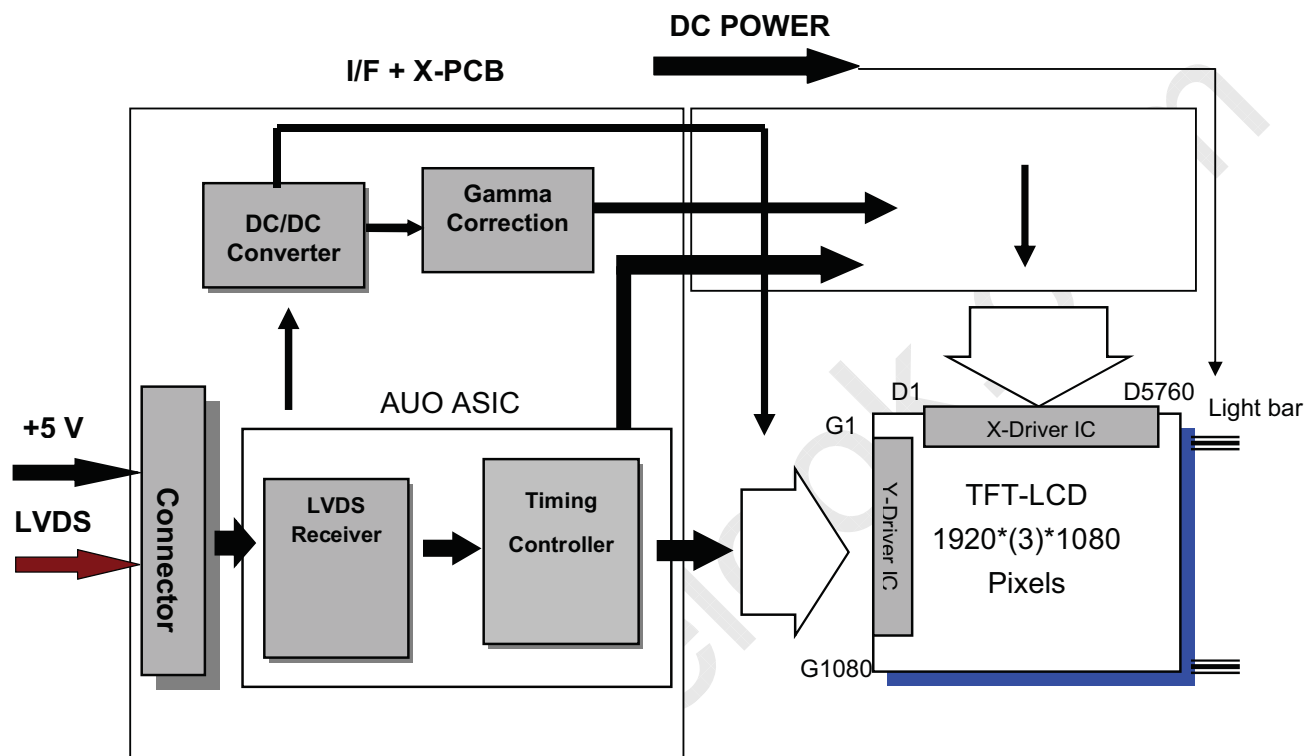

I/F PCB Interface:

FI-XB30SSRLA-HF16 (JAE)

Mating Type:

FI-X30HL (Locked Type)

FI-X30H (Unlocked Type)

FI-X30C2L (Manufactured by JAE) or Equivalent



Product Specification

G230HAN01.1

AU OPTRONICS CORPORATION

4. Absolute Maximum Ratings

Absolute maximum ratings of the module are as following:

4.1 Absolute Ratings of TFT LCD Module

Item	Symbol	Min.	Max.	Unit	Conditions
Logic/LCD Drive Voltage	VCC	-0.3	+5.5	[Volt]	Note 1, 2

4.2 Absolute Ratings of Backlight Unit

Item	Symbol	Min.	Max.	Unit	Conditions
LED Power Current	Iled	-	1.7	[A] rms	Note 1, 2


4.3 Absolute Ratings of Environment

Item	Symbol	Min.	Max.	Unit	Conditions
Operating Temperature	TOP	0	+50	[°C]	Note 3
Operation Humidity	HOP	5	90	[%RH]	
Storage Temperature	TST	-20	+60	[°C]	
Storage Humidity	HST	5	90	[%RH]	

Note 1: With in Ta= 25°C

Note 2: Permanent damage to the device may occur if exceed maximum values

Note 3: For quality performance, please refer to AUO IIS (Incoming Inspection Standard).

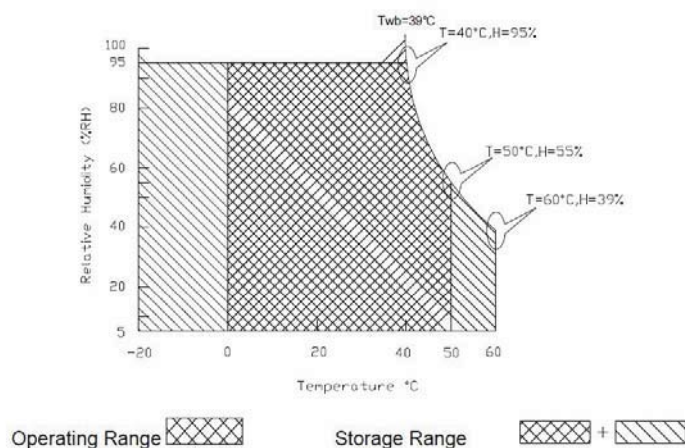



Product Specification

G230HAN01.1

AU OPTRONICS CORPORATION

5. Electrical characteristics



5.1 TFT LCD Module

5.1.1 Power Specification

Input power specifications are as follows:

Symble	Parameter	Min.	Typ.	Max.	Unit	Condition
VCC	Logic/LCD Drive Voltage	4.5	5.0	5.5	[Volt]	±10%
ICC	Input Current	-	1.17	1.27	[A]	Vin=5V, White Pattern, at 75Hz
IRush	Inrush Current	-	2.7	3.4	[A]	Note 1
PCC	VCC Power	-	5.85	6.35	[Watt]	Vin=5V, White Pattern, at 75Hz
VCCrp	Allowable Logic/LCD Drive Ripple Voltage	-	-	300	[mV] p-p	With panel loading

Note 1:

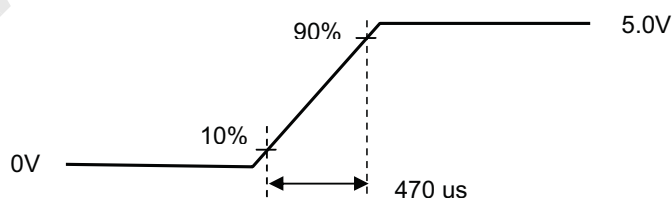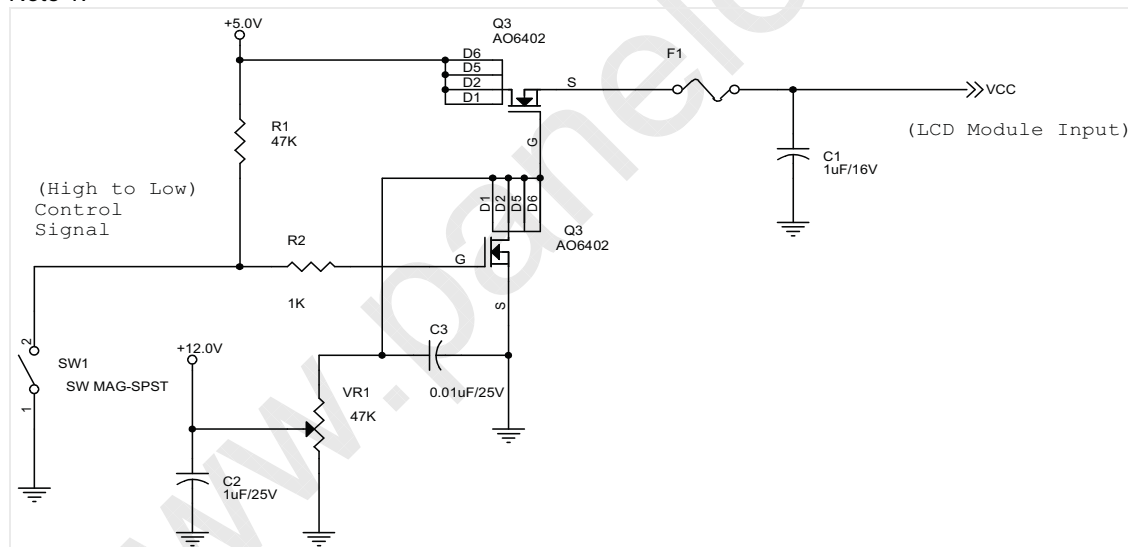

VCC rising time



Product Specification

G230HAN01.1

AU OPTRONICS CORPORATION

5.2 Backlight Unit

Following characteristics are measured under a stable condition at 25 °C (Room Temperature):

Symbol	Parameter	Min.	Typ.	Max.	Unit	Remark
I _F	LED Forward Current		60		mA	Ta = 25°C
V _F LED	Forward Voltage		57.6	64.8	Volt	I _F =60 mA, Ta = 25°C
P _{LED}	LED Power Consumption	-	13.8	15.6	Watt	I _F =60 mA, Ta = 25°C
LTLED	LED Life Time	30,000			Hrs	I _F =60 mA, Ta= 25°C

Note 1: Ta means ambient temperature of TFT-LCD module.

Note 2: P_{LED}, I_F are defined for LED B/L.(100% duty of PWM dimming)

Note 3: I_F, V_F are defined for one channel LED.

Note 4: If module is driven by high current or at high ambient temperature & humidity condition. The operating life will be reduced.

Note 5: LED life means brightness goes down to 50% initial brightness.

Note 6: Two kind types for adjusting brightness: PWM and Analog.

Note 7: Each LED light bar consists of 72 pcs LED package (4 strings x 18 pcs / string).



Product Specification

AU OPTRONICS CORPORATION

G230HAN01.1

6. Signal Characteristic

6.1 Pixel Format Image

Following figure shows the relationship of the input signals and LCD pixel format.

	1			2													1919			1920		
1st Line	R	G	B	R	G	B											R	G	B	R	G	B
	.	.	.	.	.	.	.										.	.	.	.	.	.
	.	.	.	.	.	.	.										.	.	.	.	.	.
	.	.	.	.	.	.	.										.	.	.	.	.	.
	.	.	.	.	.	.	.										.	.	.	.	.	.
	.	.	.	.	.	.	.										.	.	.	.	.	.
	.	.	.	.	.	.	.										.	.	.	.	.	.
	.	.	.	.	.	.	.										.	.	.	.	.	.
	.	.	.	.	.	.	.										.	.	.	.	.	.
	.	.	.	.	.	.	.										.	.	.	.	.	.
1080 Line	R	G	B	R	G	B											R	G	B	R	G	B




Product Specification

G230HAN01.1

AU OPTRONICS CORPORATION

6.2 The Input Data Format

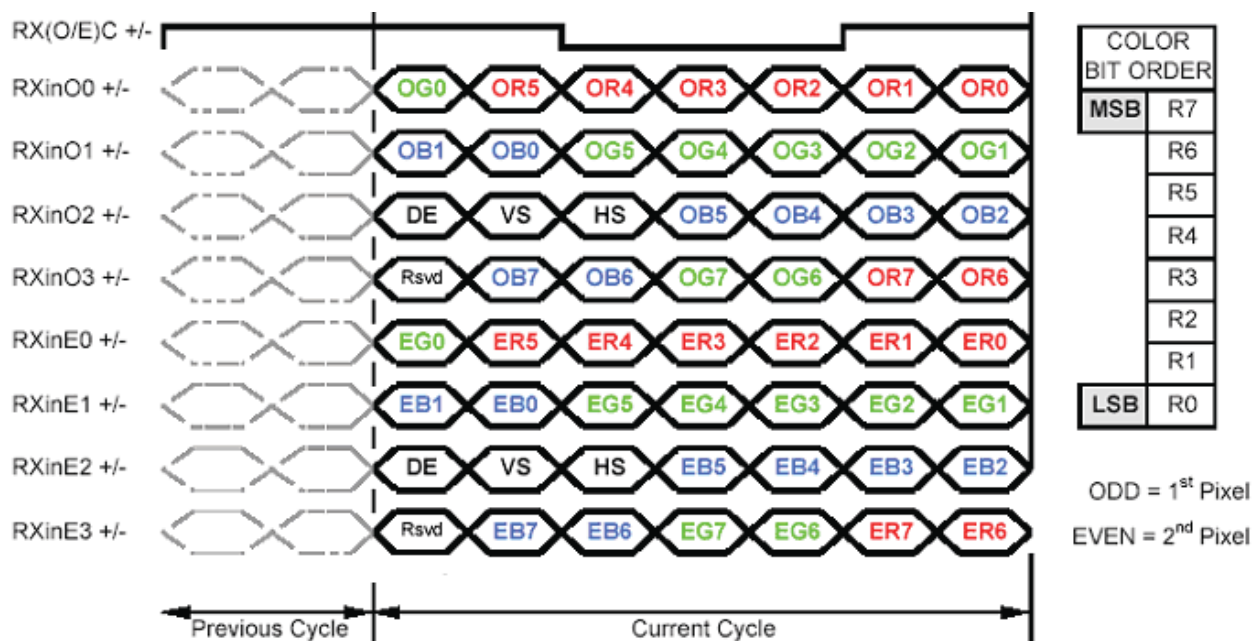

Note1: Normally DE mode only. VS and HS on EVEN channel are not used.

Note2: Please follow VESA.

Note3: 8-bit in



Product Specification

G230HAN01.1

AU OPTRONICS CORPORATION

6.3 Signal Description

The module using a pair of LVDS receiver SN75LVDS82(Texas Instruments) or compatible. LVDS is a differential signal technology for LCD interface and high speed data transfer device. Transmitter shall be SN75LVDS83(negative edge sampling) or compatible. The first LVDS port(RxOxxx) transmits odd pixels while the second LVDS port(RxExxx) transmits even pixels.

PIN #	SIGNAL NAME	DESCRIPTION
1	RxOIN0-	Negative LVDS differential data input (Odd data)
2	RxOIN0+	Positive LVDS differential data input (Odd data)
3	RxOIN1-	Negative LVDS differential data input (Odd data)
4	RxOIN1+	Positive LVDS differential data input (Odd data)
5	RxOIN2-	Negative LVDS differential data input (Odd data, H-Sync,V-Sync,DSPTMG)
6	RxOIN2+	Positive LVDS differential data input (Odd data, H-Sync,V-Sync,DSPTMG)
7	VSS	Power Ground
8	RxOCLKIN-	Negative LVDS differential clock input (Odd clock)
9	RxOCLKIN+	Positive LVDS differential clock input (Odd clock)
10	RxOIN3-	Negative LVDS differential data input (Odd data)
11	RxOIN3+	Positive LVDS differential data input (Odd data)
12	RxEIN0-	Negative LVDS differential data input (Even data)
13	RxEIN0+	Positive LVDS differential data input (Even data)
14	VSS	Power Ground
15	RxEIN1-	Negative LVDS differential data input (Even data)
16	RxEIN1+	Positive LVDS differential data input (Even data)
17	VSS	Power Ground
18	RxEIN2-	Negative LVDS differential data input (Even data)
19	RxEIN2+	Positive LVDS differential data input (Even data)
20	RxECLKIN-	Negative LVDS differential clock input (Even clock)
21	RxECLKIN+	Positive LVDS differential clock input (Even clock)
22	RxEIN3-	Negative LVDS differential data input (Even data)
23	RxEIN3+	Positive LVDS differential data input (Even data)
24	VSS	Power GND
25	NC	NC
26	NC	NC
27	PWM_OUT	PWM_OUT
28	VCC	+5.0V Power Supply
29	VCC	+5.0V Power Supply
30	VCC	+5.0V Power Supply




Product Specification

G230HAN01.1

AU OPTRONICS CORPORATION

Note1:

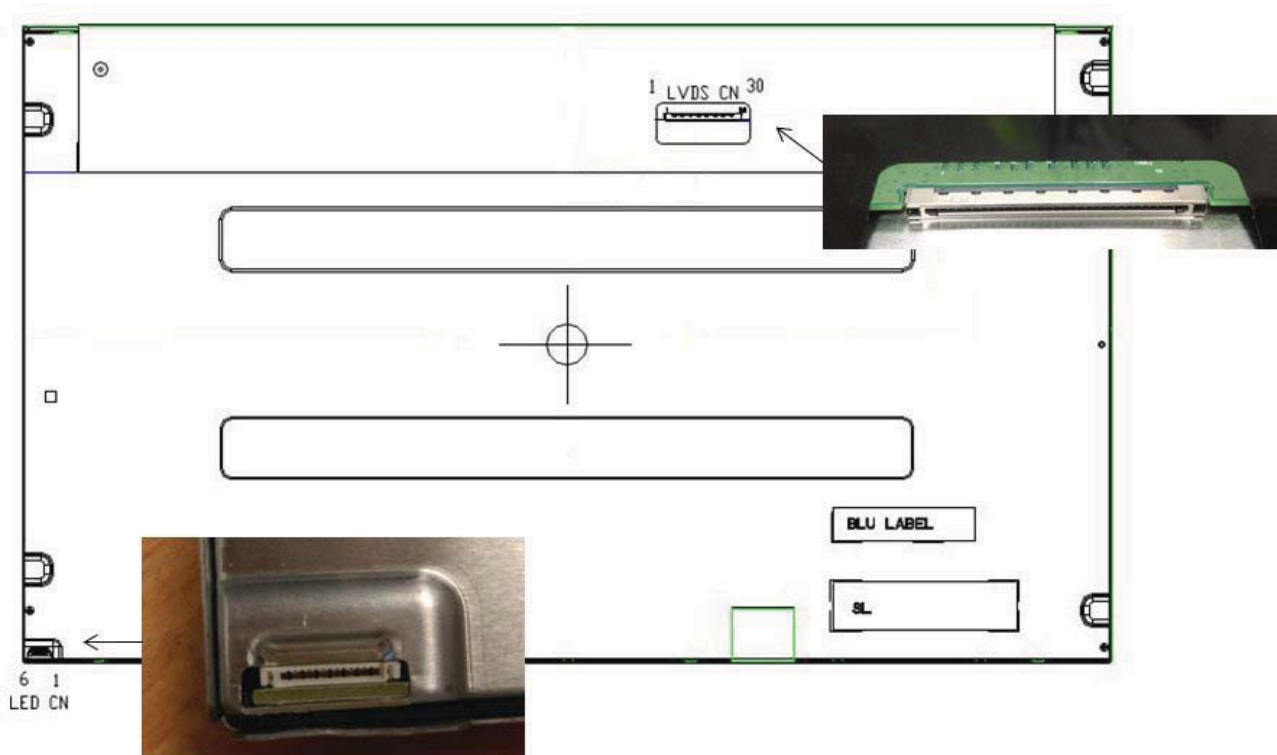

Note 2: All GND(ground) pins should be connected together and to be Vss which should also be connected to the LCD's metal frame.

Note 3: All Vcc (power input) pins should be connected together.

Note 4: Input level of LVDS signal is based on the IEA 664 Standard.

Note 5: PWM_OUT signal controls the burst frequency of an inverter.

This signal is synchronized with vertical frequency.

Its frequency is 3 times of vertical frequency, and duty ratio is 50%.

If not use this pin then no connection

Note 6: Input signals of odd and even clock shall be the same timing.

Note 7: Please follow VESA.



Product Specification

G230HAN01.1

AU OPTRONICS CORPORATION

6.4 Interface Timing

6.4.1 Timing Characteristics

Signal	Item	Symbol	Min	Typ	Max	Unit
Vertical Section	Period	T_v	1090	1100	1200	Th
	Active	$T_{disp(v)}$	1080	1080	1080	Th
	Blanking	$T_{bp(v)}+T_{fp(v)}+PW_{vs}$	10	20	120	Th
Horizontal Section	Period	T_h	1000	1088	1200	Tclk
	Active	$T_{disp(h)}$	960	960	960	Tclk
	Blanking	$T_{bp(h)}+T_{fp(h)}+PW_{hs}$	40	128	240	Tclk
Clock	Period	T_{clk}	11.76	13.89	15.38	ns
	Frequency	Freq.	60	72	87.5	MHz
Frame Rate	Frequency	$1/T_v$	49	60	75	Hz
Horizontal Frequency	Frequency	F_h	49	65.28	90	kHz


Note 1: Only DE mode operation.

The input of Hsync & Vsync signal does not have an effect upon the LCD normal operation.

Note 2: The performance of the electro-optical characteristics may be influenced by variance of the vertical refresh rates.

Note 3: Horizontal period should be even.

6.4.2 Timing Diagram

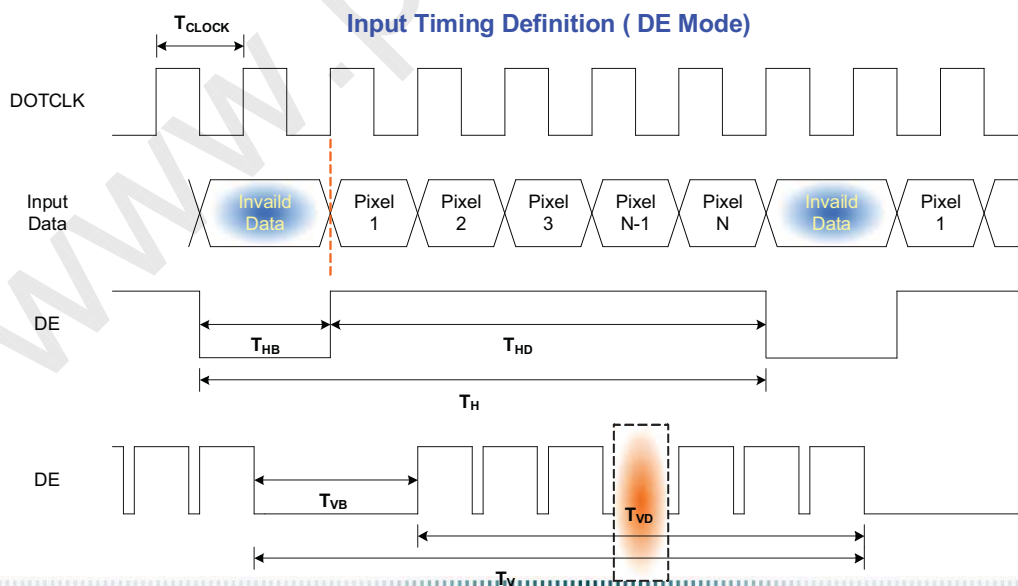

document version 1.0

18/25




Product Specification

G230HAN01.1

AU OPTRONICS CORPORATION

6.5 Power ON/OFF Sequence

VCC power on/off sequence is as follows. Interface signals are also shown in the chart. Signals from any system shall be Hi-Z state or low level when VCC is off.

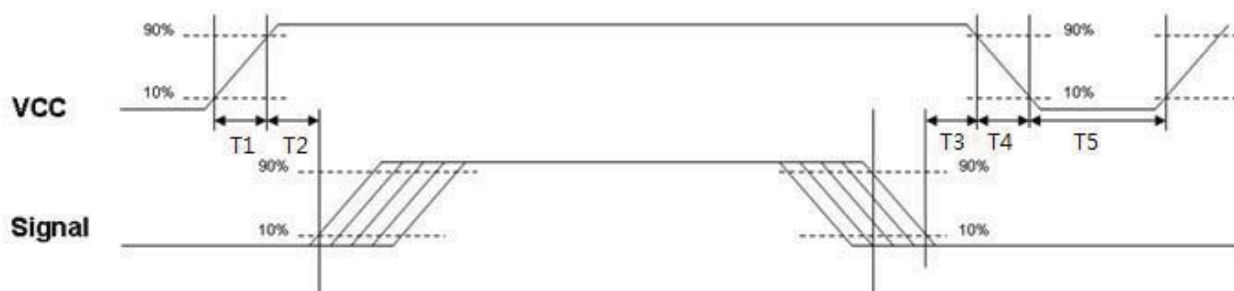

Power Sequence Timing

Power Sequence Timing				
Parameter	Value			Units
	Min.	Typ.	Max.	
T1	0.5	--	10	ms
T2	30	40	50	
T3	0	16	50	
T4	--	--	10	
T5	1000	--	--	



Product Specification

G230HAN01.1

AU OPTRONICS CORPORATION

7. Connector & Pin Assignment

Physical interface is described as for the connector on module. These connectors are capable of accommodating the following signals and will be following components.

7.1 TFT LCD Module

7.1.1 Connector

Connector Name / Designation	LVDS Connector
Manufacturer	JAE
Type Part Number	FI-XB30SSRLA-HF16
Mating Housing Part Number	FI-X30HL (Locked Type) FI-X30H (Unlocked Type) FI-X30C2L (JAE) or Equivalent

7.1.2 Pin Assignment

Pin#	Signal Name	Pin#	Signal Name
1	RxOIN0-	2	RxOIN0+
3	RxOIN1-	4	RxOIN1+
5	RxOIN2-	6	RxOIN2+
7	VSS	8	RxOCLKIN-
9	RxOCLKIN+	10	RxOIN3-
11	RxOIN3+	12	RxEIN0-
13	RxEIN0+	14	VSS
15	RxEIN1-	16	RxEIN1+
17	VSS	18	RxEIN2-
19	RxEIN2+	20	RxECLKIN-
21	RxECLKIN+	22	RxEIN3-
23	RxEIN3+	24	VSS
25	NC	26	NC
27	PWM_OUT	28	VCC
29	VCC	30	VCC



Product Specification

G230HAN01.1

AU OPTRONICS CORPORATION

7.2 Backlight Unit

7.2.1 Connector

Connector Name / Designation	Light Bar Connector
Manufacturer	E&T
Type	7182K-F06N-00L (6 Pin FFC Type)

7.2.2 Pin Assignment

Pin no.	Signal name
1	Current Feedback
2	Current Feedback
3	VLED (voltage in)
4	VLED (voltage in)
5	Current Feedback
6	Current Feedback



Product Specification

G230HAN01.1

AU OPTRONICS CORPORATION

8. Reliability Test

Environment test conditions are listed as following table.

Items	Required Condition	Note
Temperature Humidity Bias (THB)	Ta= 50°C, 80%RH, 300hours	
High Temperature Operation (HTO)	Ta= 50°C, 300hours	
Low Temperature Operation (LTO)	Ta= 0°C, 300hours	
High Temperature Storage (HTS)	Ta= 60°C, 300hours	
Low Temperature Storage (LTS)	Ta= -20°C, 300hours	
Vibration Test (Non-operation)	Acceleration: 1.5 G Wave: Random Frequency: 10 - 200 - 10 Hz Sweep: 30 Minutes each Axis (X, Y, Z)	
Shock Test (Non-operation)	Acceleration: 50 G Wave: Half-sine Active Time: 20 ms Direction: $\pm X$, $\pm Y$, $\pm Z$ (one time for each Axis)	
Drop Test	Height: 60 cm, package test	
Thermal Shock Test (TST)	-20 °C /30min, 60/ °C 30min, 100 cycles	1
On/Off Test	On/10sec, Off/10sec, 30,000 cycles	
ESD (Electrostatic Discharge)	Contact Discharge: $\pm 8KV$, 150pF(330 Ω) 1sec, 9 points, 25 times/ point.	2
	Air Discharge: $\pm 15KV$, 150pF(330 Ω) 1sec 9 points, 25 times/ point.	
Altitude Test	Operation:10,000 ft Non-Operation:30,000 ft	

Note 1: The TFT-LCD module will not sustain damage after being subjected to 100 cycles of rapid temperature change. A cycle of rapid temperature change consists of varying the temperature from -20°C to 60°C, and back again. Power is not applied during the test. After temperature cycling, the unit is placed in normal room ambient for at least 4 hours before power on.

Note 2: According to EN61000-4-2 , ESD class B: Some performance degradation allowed. No data lost. Self-recoverable. No hardware failures.

Note 3:

- Water condensation is not allowed for each test items.
- Each test is done by new TFT-LCD module. Don't use the same TFT-LCD module repeatedly for reliability test.
- The reliability test is performed only to examine the TFT-LCD module capability.
- To inspect TFT-LCD module after reliability test, please store it at room temperature and room humidity for 24 hours at least in advance.
- No function failure occurs.



Product Specification


G230HAN01.1

AU OPTRONICS CORPORATION

9. Shipping Label and Packaging

9.1 Shipping Label

The label is on the panel as shown below:

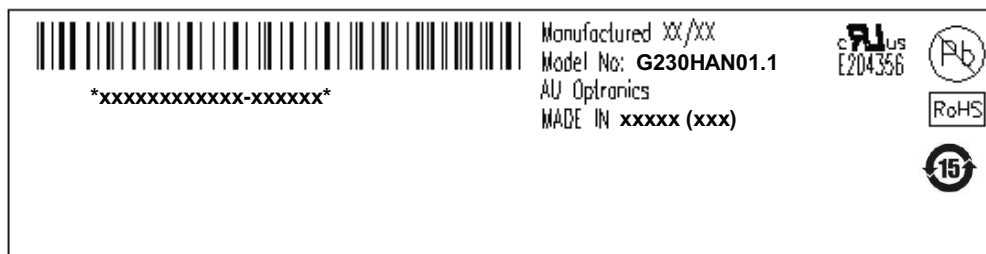


Note 1: For Pb Free products, AUO will add  for identification.

Note 2: For RoHS compatible products, AUO will add  for identification.

Note 3: For China RoHS compatible products, AUO will add  for identification.

Note 4: The Green Mark will be presented only when the green documents have been ready by AUO Internal Green Team.

9.2 Packaging

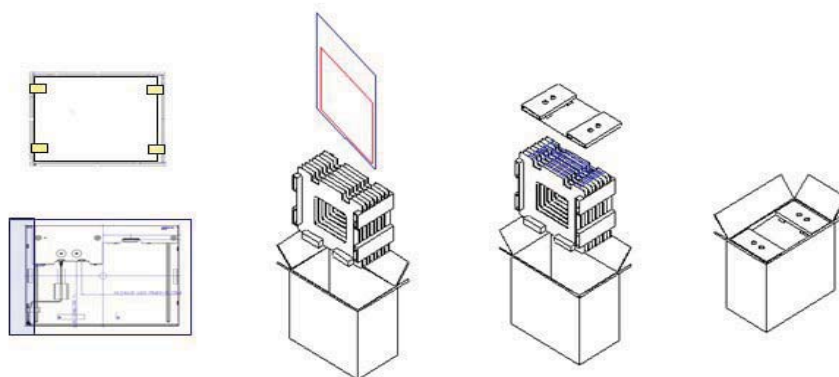

Max capacity : 8 PCS TFT-LCD module per carton

Max weight: 15.5 kg per carton

Outside dimension of carton: 620mm(L)* 220mm(W)*415mm(H)

Pallet size : 980 mm * 740 mm * 132mm

Box stacked

Module by air : (1*4) *3 layers , one pallet put 12 boxes , total 96pcs module

Module by sea : One pallet (1 *4) *3 layers + One pallet (1 *4) *1 layers , total 128 pcs module

Module by sea_ HQ : One pallet (1 *4) *3 layers + One pallet (1 *4) *1 layers, total 128 pcs module




Product Specification

G230HAN01.1

AU OPTONICS CORPORATION

10. Mechanical Characteristic

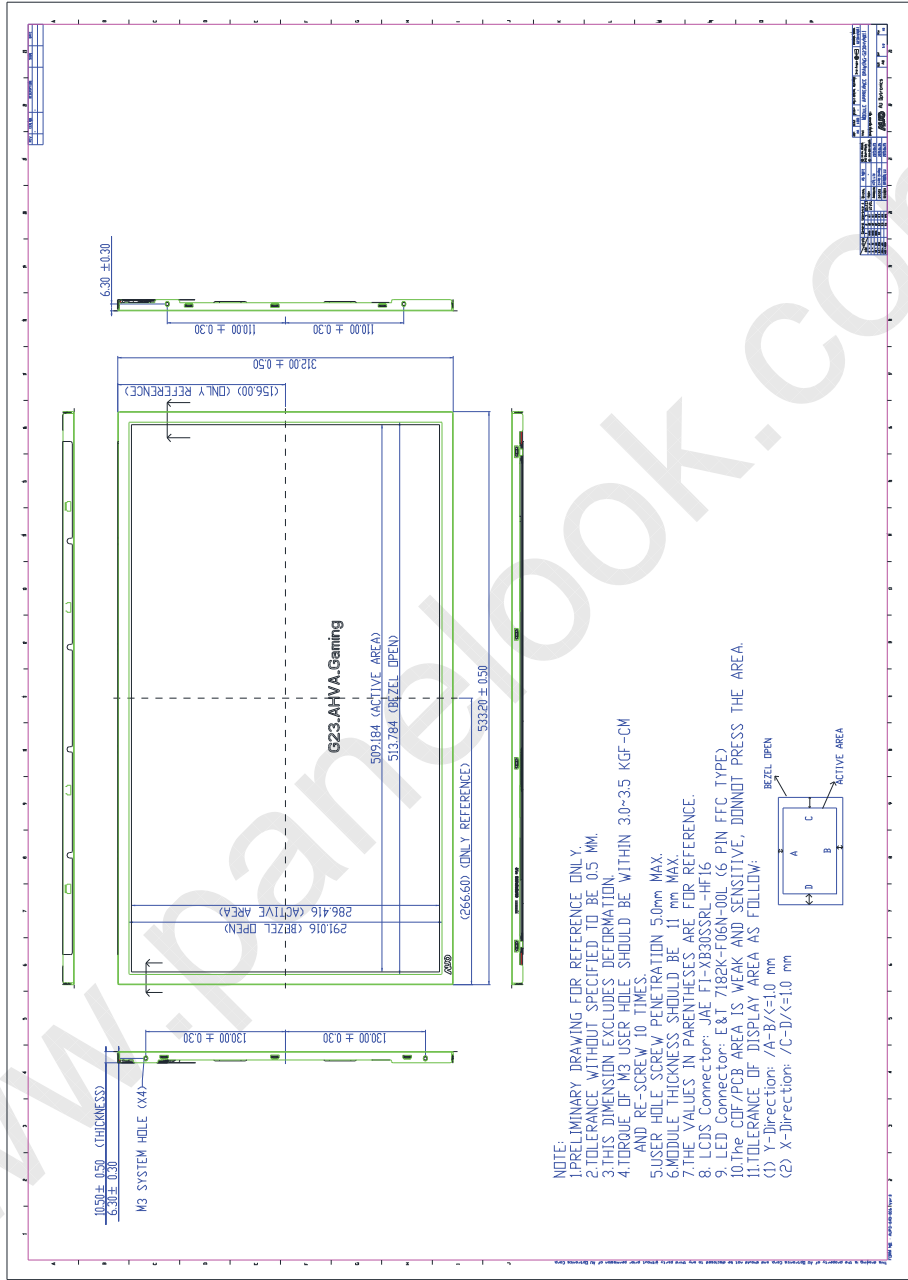




Product Specification

AU OPTONICS CORPORATION

G230HAN01.1

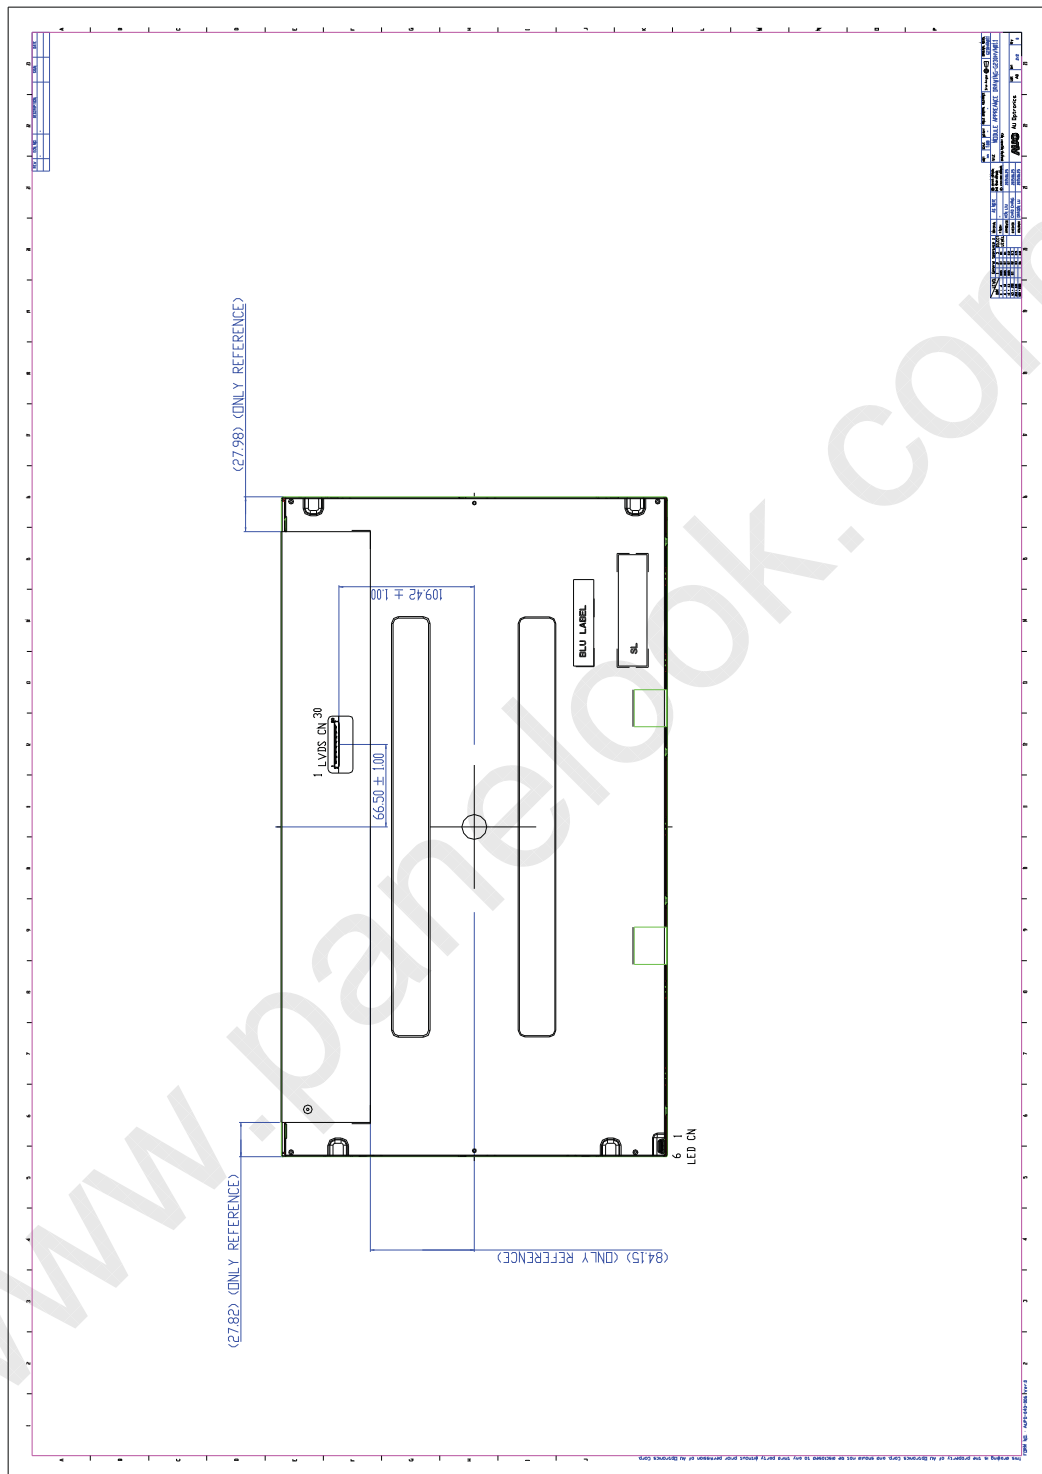

document version 1.0

25/25