

**InfoVision Optoelectronics (Kunshan) Co.,LTD.**

Document Title	M090AWA6 R0 Tentative Product Specification			Page No.	1/25
Document No.		Issue date	2020/03/27	Revision	00

Tentative Product Specification

To:**Product Name: M090AWA6 R0****Document Issue Date: 2020/03/27**

Customer	InfoVision Optoelectronics
<u>SIGNATURE</u> _____ _____ _____ Please return 1 copy for your confirmation with your signature and comments.	<u>SIGNATURE</u> REVIEWED BY CQM _____ PREPARED BY FAE _____

Note: 1. Please contact InfoVision Company before designing your product based on this product.

2. The information contained herein is presented merely to indicate the characteristics and performance of our products. No responsibility is assumed by IVO for any intellectual property



InfoVision Optoelectronics (Kunshan) Co.,LTD.

Document Title	M090AWA6 R0 Tentative Product Specification			Page No.	2/25
Document No.		Issue date	2020/03/27	Revision	00

claims or other problems that may result from application based on the module described herein.

[illegible]

**InfoVision Optoelectronics (Kunshan) Co.,LTD.**

Document Title	M090AWA6 R0 Tentative Product Specification			Page No.	3/25
Document No.		Issue date	2020/03/27	Revision	00

CONTENTS

1.0 GENERAL DESCRIPTIONS	4
2.0 ABSOLUTE MAXIMUM RATINGS	6
3.0 OPTICAL CHARACTERISTICS.....	7
4.0 ELECTRICAL CHARACTERISTICS.....	10
5.0 MECHANICAL CHARACTERISTICS	19
6.0 RELIABILITY CONDITIONS	21
7.0 PACKAGE SPECIFICATION	22
8.0 LOT MARK.....	23
9.0 GENERAL PRECAUTION	24



InfoVision Optoelectronics (Kunshan) Co.,LTD.

Document Title	M090AWA6 R0 Tentative Product Specification			Page No.	4/25
Document No.		Issue date	2020/03/27	Revision	00

1.0 General Descriptions

1.1 Introduction

The M090AWA6 R0 is a Color Active Matrix Liquid Crystal Display with a back light system. The matrix uses a-Si Thin Film Transistor as a switching device. This TFT LCD has a 9.0 inch diagonally measured active display area with HD resolution (1280horizontal by 720vertical pixels array).

1.2 Features

- Supported HD Resolution
- LVDS Interface
- Wide View Angle
- Compatible with RoHS Standard

1.3 Product Summary

Items		Specifications	Unit
Screen Diagonal		9.0	inch
Active Area (H x V)		(198.72)x (111.78)	mm
Number of Pixels (H x V)		(1,280) x (720)	-
Pixel Pitch (H x V)		(0.15525) x (0.15525)	mm
Pixel Arrangement		R.G.B. Vertical Stripe	-
Display Mode		Normally Black	-
White Luminance		(1,000) (Typ.)	cd /m ²
Contrast Ratio		(1,000) (Typ.)	-
Response Time		(30) (Typ) @ 25℃	ms
Input Voltage		(3.3) (Typ.)	V
Power Consumption		(7.71) (max.)@ White pattern ,FV=60Hz	W
Weight		(328.3) (Max.)	g
Outline Dimension (H x V x D)	w/o PCBA	(212.20) (Typ.) x (127.50) (Typ.) x (7.90) (Max.)	mm
	with PCBA	(212.20) (Typ.) x (127.50) (Typ.) x (11.0) (Max.)	
Electrical Interface (Logic)		LVDS	-
Support Color		16.7 M	-
NTSC		(70) (Typ.)	%
Surface Treatment		HC/3H	-



InfoVision Optoelectronics (Kunshan) Co.,LTD.

Document Title	M090AWA6 R0 Tentative Product Specification			Page No.	5/25
Document No.		Issue date	2020/03/27	Revision	00

1.4 Functional Block Diagram

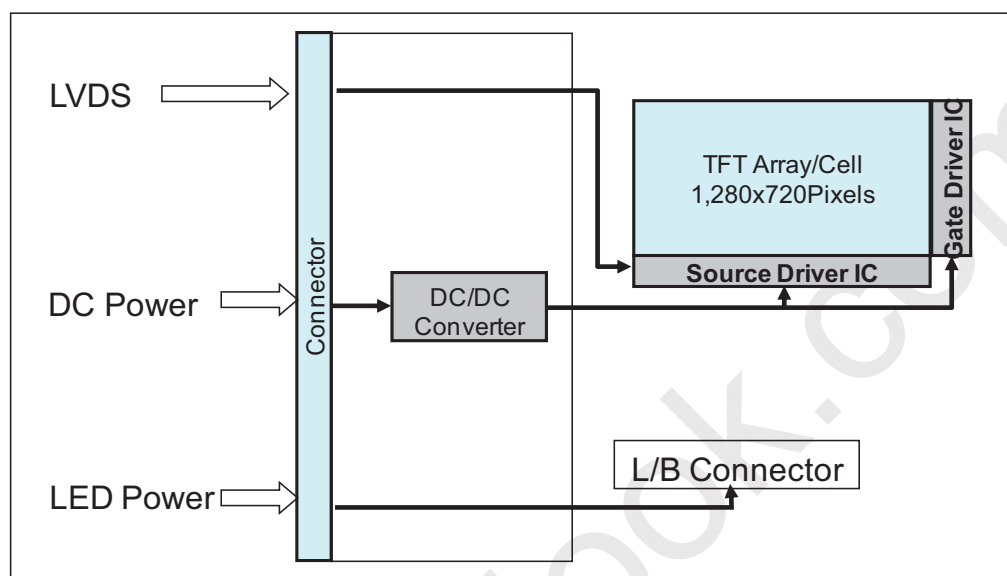


Figure 1 shows the functional block diagram of the LCD module.

Figure 1 Block Diagram

1.5 Pixel Mapping

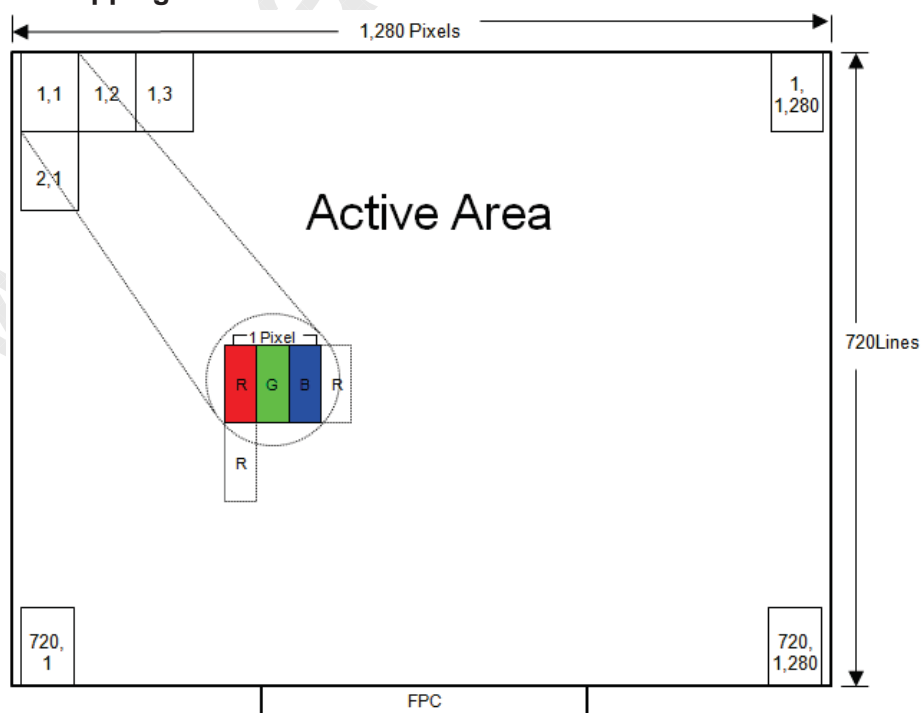


Figure 2 Pixel Mapping



InfoVision Optoelectronics (Kunshan) Co.,LTD.

Document Title	M090AWA6 R0 Tentative Product Specification			Page No.	6/25
Document No.		Issue date	2020/03/27	Revision	00

2.0 Absolute Maximum Ratings

Table 1 Electrical & Environment Absolute Rating

Item	Symbol	Min.	Max.	Unit	Note
Logic Supply Voltage	V_{DD}	(-0.3)	(4.0)	V	(1),(2), (3),(4)
Operating Temperature	T_{gs}	(-30)	(85)	°C	
Storage Temperature	T_a	(-40)	(90)	°C	

Note (1) All the parameters specified in the table are absolute maximum rating values that may cause faulty operation or unrecoverable damage, if exceeded. It is recommended to follow the typical value.

Note (2) All the contents of electro-optical specifications and display fineness are guaranteed under Normal Conditions. All the display fineness should be inspected under normal conditions. Normal conditions are defined as follow: Temperature: 25°C, Humidity: 55± 10%RH.

Note (3) Unpredictable results may occur when it was used in extreme conditions. T_a = Ambient Temperature, T_{gs} = Glass Surface Temperature. All the display fineness should be inspected under normal conditions.

Note (4) Temperature and relative humidity range are shown in the figure below. Wet bulb temperature should be lower than (57.8)°C, and no condensation of water. Besides, protect the module from static electricity.

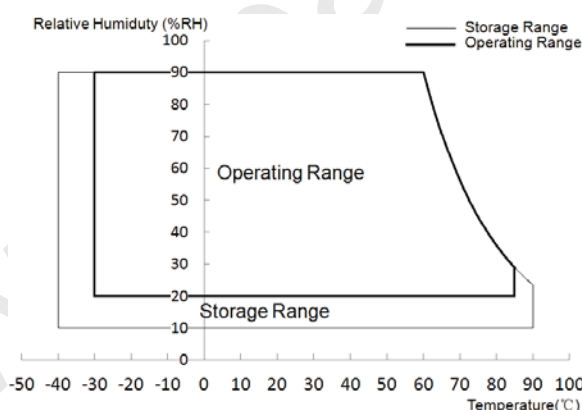


Figure 3 Absolute Ratings of Environment of the LCD Module



InfoVision Optoelectronics (Kunshan) Co.,LTD.

Document Title	M090AWA6 R0 Tentative Product Specification			Page No.	7/25
Document No.		Issue date	2020/03/27	Revision	00

3.0 Optical Characteristics

The optical characteristics are measured under stable conditions as following notes.

Table 2 Optical Characteristics


Item	Conditions		Min.	Typ.	Max.	Unit	Note
Viewing Angle (CR≥10)	Horizontal	θ _{x+}	TBD	(80)	-	degree	(1),(2),(3),(4)(8)
		θ _{x-}	TBD	(80)	-		
	Vertical	θ _{y+}	TBD	(80)	-		
		θ _{y-}	TBD	(80)	-		
Contrast Ratio	Center		(800)	(1,000)	-	-	(1),(2),(4),(8) θ _x =θ _y =0°
Response Time	Rising + Falling	25℃	-	(30)	(35)	ms	(1),(2),(5),(8) θ _x =θ _y =0°
		0℃	-	(65)	(95)	ms	
		-20℃	-	(150)	(200)	ms	
		-30℃	-	(300)	(450)	ms	
Color Chromaticity (CIE1931)	Red x		Typ. -0.04	(0.638)	Typ. +0.04	-	(1),(2),(3),(8) θ _x =θ _y =0°
	Red y			(0.344)		-	
	Green x			(0.317)		-	
	Green y			(0.625)		-	
	Blue x			(0.149)		-	
	Blue y			(0.078)		-	
	White x			(0.310)		-	
	White y			(0.330)		-	
NTSC	-		TBD	(70)	-	%	(1),(2),(3),(8) θ _x =θ _y =0°
White Luminance	Center		(800)	(1,000)	-	cd/m ²	(1),(2),(6),(8) θ _x =θ _y =0°
Luminance Uniformity	9 Points	White	(70)	(85)	-	%	(1),(2),(7),(8) θ _x =θ _y =0°
		Black	(50)	-	-		

Note (1) Measurement Setup:

The LCD module should be stabilized at given ambient temperature (25℃) for 30 minutes to avoid abrupt temperature changing during measuring. In order to stabilize the luminance, the measurement should be executed after lighting backlight for 30 minutes in the windless room.

**InfoVision Optoelectronics (Kunshan) Co.,LTD.**


Document Title	M090AWA6 R0 Tentative Product Specification			Page No.	8/25
Document No.		Issue date	2020/03/27	Revision	00

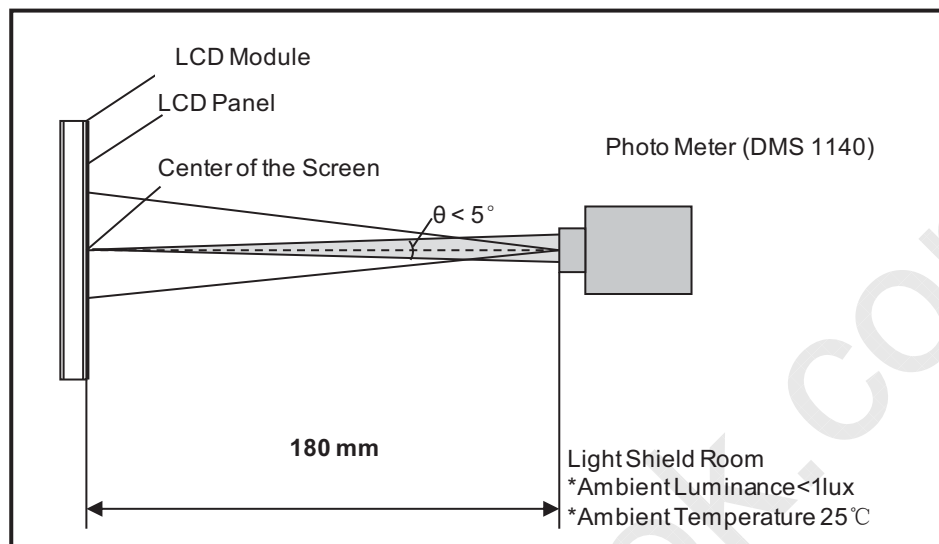**Figure 4 Measurement Setup**

Note (2) The LED input parameter setting as:

I_{LED} : (234)mA

Note (3) Definition of Viewing Angle

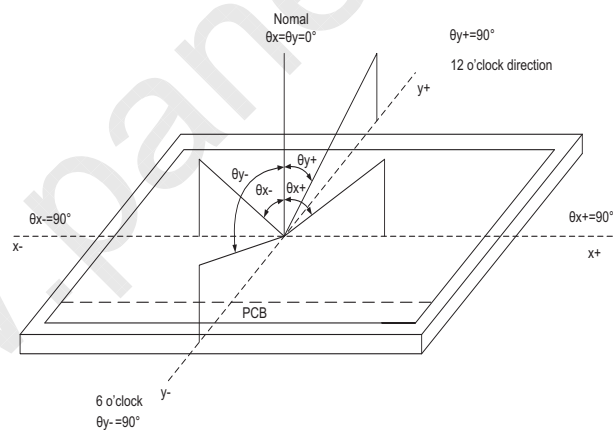**Figure 5 Definition of Viewing Angle**

Note (4) Definition of Contrast Ratio (CR)

The contrast ratio can be calculated by the following expression:

Contrast Ratio (CR) = The luminance of White pattern/ The luminance of Black pattern



InfoVision Optoelectronics (Kunshan) Co.,LTD.

Document Title	M090AWA6 R0 Tentative Product Specification			Page No.	9/25
Document No.		Issue date	2020/03/27	Revision	00

Note (5) Definition of Response Time (T_R , T_F)

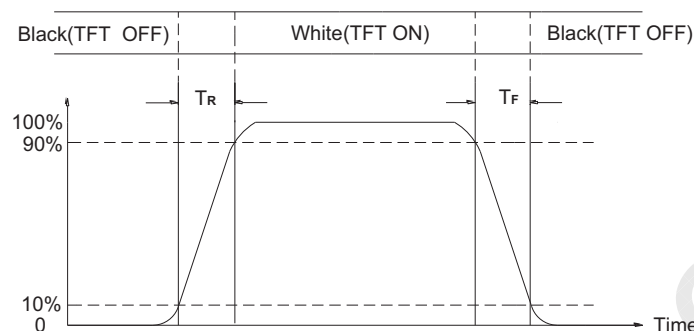


Figure 6 Definition of Response Time

Note (6) Definition of Luminance of White

Measure the luminance of White pattern (Ref.: Active Area)

Display Luminance= L_1 (center point)

Note (7) Definition of Luminance Uniformity (Ref.: Active Area)

Measure the luminance of White/Black pattern at 9 points.

Luminance Uniformity= $\text{Min.}(L_1, L_2, \dots L_9) / \text{Max.}(L_1, L_2, \dots L_9)$

H—Active Area Width, V—Active Area Height, L—Luminance

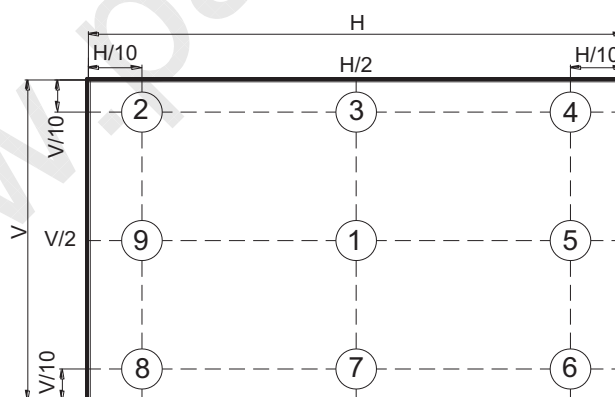


Figure 7 Measurement Locations of 9 Points

Note (8) All optical data are based on IVO given system & nominal parameter & testing machine in this document.

**InfoVision Optoelectronics (Kunshan) Co.,LTD.**

Document Title	M090AWA6 R0 Tentative Product Specification			Page No.	10/25
Document No.		Issue date	2020/03/27	Revision	00

4.0 Electrical Characteristics**4.1 Interface Connector****Table 3 Signal Connector Type**

Item	Description
Mating Receptacle / Type (Reference)	JUSTCONN / 101049-204050

Table 4 Signal Connector Pin Assignment

Pin No.	Symbol	Description	Remarks
1	GND	Ground.	-
2	GND	Ground.	-
3	PIND3	LVDS differential input 3+	-
4	NIND3	LVDS differential input 3-	-
5	GND	Ground.	-
6	CLKP	LVDS differential clock positive input	-
7	CLKN	LVDS differential clock negative input	-
8	GND	Ground.	-
9	PIND2	LVDS differential input 2+	-
10	NIND2	LVDS differential input 2-	-
11	GND	Ground.	-
12	PIND1	LVDS differential input 1+	-
13	NIND1	LVDS differential input 1-	-
14	GND	Ground.	-
15	PIND0	LVDS differential input 0+	-
16	NIND0	LVDS differential input 0-	-
17	GND	Ground.	-
18	NC/CS	IVO test pin.let it open	-
19	NC/SCL	IVO test pin.let it open	-
20	NC/SDO	IVO test pin.let it open	-
21	NC/SDI	IVO test pin.let it open	(1)
22	GND	Ground.	-
23	NC	No connection.	-
24	VDD	Digital power 3.3V supply voltage.	
25	VDD	Digital power 3.3V supply voltage.	-
26	VDD	Digital power 3.3V supply voltage.	-
27	VDD	Digital power 3.3V supply voltage.	-

**InfoVision Optoelectronics (Kunshan) Co.,LTD.**

Document Title	M090AWA6 R0 Tentative Product Specification			Page No.	11/25
Document No.		Issue date	2020/03/27	Revision	00

28	NC/VPP	IVO test pin.let it open	-
29	GND	Ground.	-
30	GND	Ground.	-
31	TH-	Backlight thermistor-	-
32	TH+	Backlight thermistor+	-
33	CATHODE1	LED Light,cathode -	-
34	CATHODE2	LED Light,cathode -	-
35	CATHODE3	LED Light,cathode -	-
36	NC	No connection.	-
37	NC	No connection.	-
38	ANODE1	LED Light,anode +	-
39	ANODE2	LED Light,anode +	-
40	ANODE3	LED Light,anode +	-

Note (1) : BIST Function:

H: (3.0)~(3.6)V, Bist Mode

L: (0)V(GND),Normal Mode

**InfoVision Optoelectronics (Kunshan) Co.,LTD.**

Document Title	M090AWA6 R0 Tentative Product Specification			Page No.	12/25
Document No.		Issue date	2020/03/27	Revision	00

4.2 Signal Electrical Characteristics**4.2.1 Signal Electrical Characteristics For LVDS Receiver**

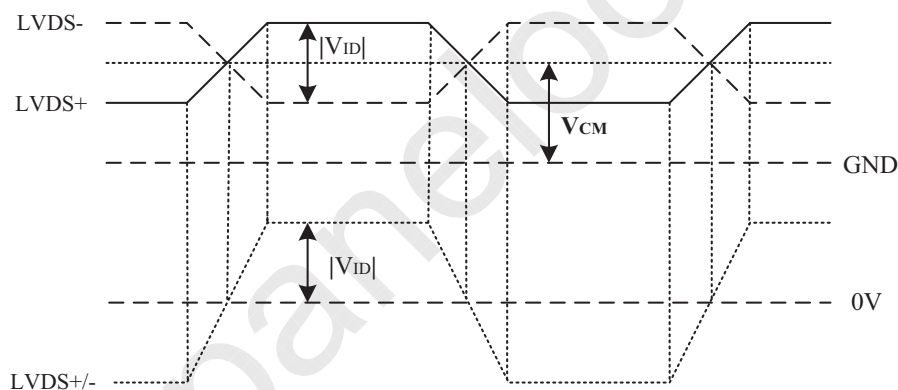
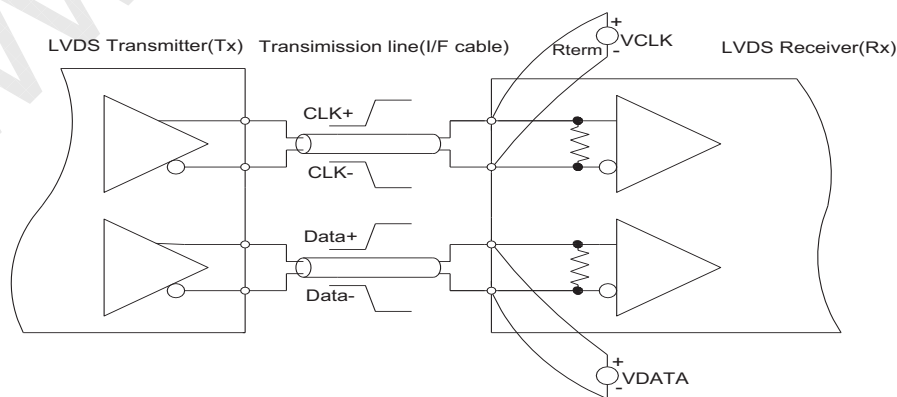
The built-in LVDS receiver is compatible with (ANSI/TIA/TIA-644) standard.

Table 5 LVDS Receiver Electrical Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Differential Input High Threshold	V _{th}	-	-	(+100)	mV	V _{CM} =+1.2V
Differential Input Low Threshold	V _{tl}	(-100)	-	-	mV	V _{CM} =+1.2V
Magnitude Differential Input Voltage	V _{ID}	(100)	-	(600)	mV	-
Common Mode Voltage	V _{CM}	(1)	(1.2)	1.7- V _{ID} /2	V	-

Note (1) Input signals shall be low or Hi- resistance state when VDD is off.

Note (2) All electrical characteristics for LVDS signal are defined and shall be measured at the interface connector of LCD.

**Figure 8 Voltage Definitions****Figure 9 Measurement System**



InfoVision Optoelectronics (Kunshan) Co.,LTD.

Document Title	M090AWA6 R0 Tentative Product Specification			Page No.	13/25
Document No.		Issue date	2020/03/27	Revision	00

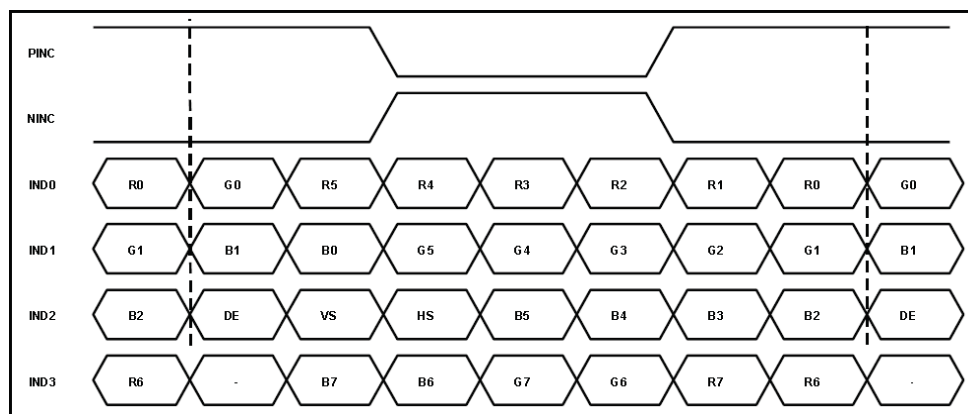


Figure 10 Data Mapping

**InfoVision Optoelectronics (Kunshan) Co.,LTD.**

Document Title	M090AWA6 R0 Tentative Product Specification			Page No.	14/25
Document No.		Issue date	2020/03/27	Revision	00

4.2.2 LVDS Receiver Internal Circuit

Figure 11 shows the internal block diagram of the LVDS receiver. This LCD module equips termination resistors for LVDS link.

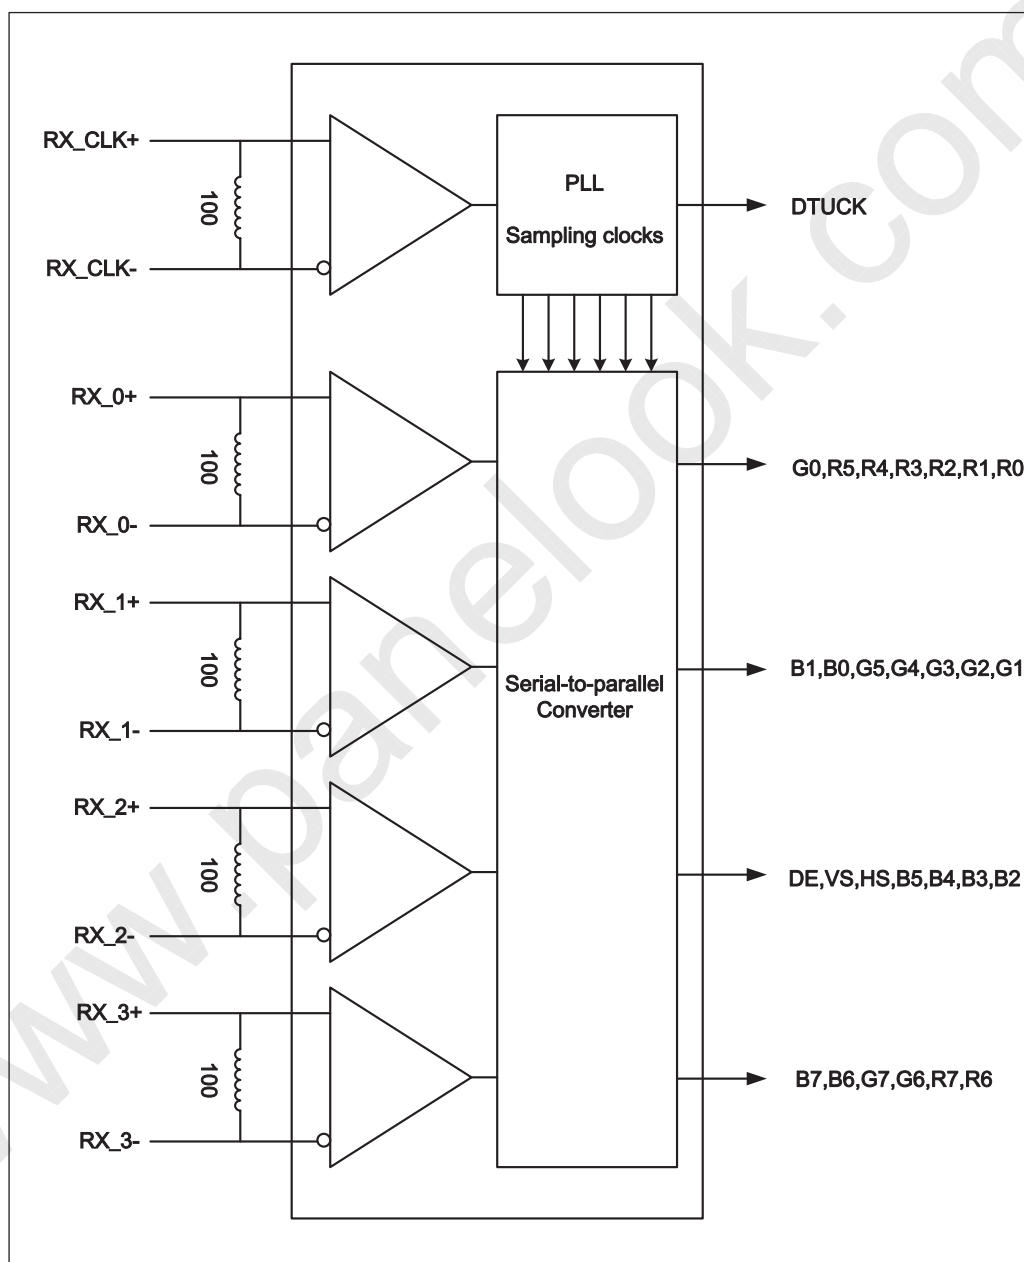


Figure 11 LVDS Receiver Internal Circuit

**InfoVision Optoelectronics (Kunshan) Co.,LTD.**

Document Title	M090AWA6 R0 Tentative Product Specification			Page No.	15/25
Document No.		Issue date	2020/03/27	Revision	00

4.3 Interface Timings**Table 6 Interface Timings**

Parameter	Symbol	Min.	Typ.	Max.	Unit
LVDS Clock Frequency	Fclk	(57.1)	(58.1)	(85)	MHz
H Total Time	HT	(1,309)	(1,322)	(1,664)	Clocks
H Active Time	HA	(1,280)			Clocks
V Total Time	VT	(727)	(733)	(936)	Lines
V Active Time	VA	(720)			Lines
Frame Rate	FV	(55)	(60)	(65)	Hz

Note1: $HT * VT * \text{Frame Frequency} \leq (85) \text{ MHz}$

Note2: All reliabilities are specified for timing specification based on refresh rate of (60)Hz.

M090AWA6 R0 is secured only for function under lower refresh rate; (60)Hz at Normal mode



InfoVision Optoelectronics (Kunshan) Co.,LTD.

Document Title	M090AWA6 R0 Tentative Product Specification			Page No.	16/25
Document No.		Issue date	2020/03/27	Revision	00

4.4 Input Power Specifications

Input power specifications are as follows.

Table 7 Input Power Specifications

Parameter		Symbol	Min.	Typ.	Max.	Unit	Note
<i>System Power Supply</i>							
LCD Drive Voltage (Logic)		V_{DD}	(3.0)	(3.3)	(3.3)	V	(1),(2)
VDD Current	White Pattern	I_{DD}	-	-	(0.23)	A	(1),(4)
VDD Power Consumption	White Pattern	P_{DD}	-	-	(0.76)	W	
LCD Self Test (BIST)	High level voltage	V_{BIST}	(3.0)	-	(3.6)	V	(1)
	Low level voltage		(0)	-	(0.4)	V	
Rush Current		I_{Rush}	-	-	(1.0)	A	(1),(5)
Allowable Logic/LCD Drive Ripple Voltage		V_{VDD-RP}	-	-	(200)	mV	(1),(3)
<i>LED Power Supply</i>							
LED Input Voltage		V_{LED}	(25.2)	(27.0)	(29.7)	V	(1),(2),(7)
LED Power Consumption		P_{LED}	-	-	(6.95)	W	(1), (7)
LED Forward Voltage		V_F	(2.8)	(3.0)	(3.3)	V	(1),(2)
LED Forward Current		I_F	-	(78)	-	mA	
LED Life Time		LT	(30,000)	-	-	Hours	(1),(6)

Note (1) All of the specifications are guaranteed under normal conditions. Normal conditions are defined as follow: Temperature: 25℃, Humidity: 55± 10%RH.

Note (2) All of the absolute maximum ratings specified in the table, if exceeded, may cause faulty operation or unrecoverable damage.It is recommended to follow the typical value.

Note (4) The specified V_{DD} current and power consumption are measured under the $V_{DD} = (3.3)$ V, FV= (60) Hz condition and White pattern.

Note (5) The figures below is the measuring condition of V_{DD} . Rush current can be measured when T_{RUSH} is 0.5 ms.



InfoVision Optoelectronics (Kunshan) Co.,LTD.

Document Title	M090AWA6 R0 Tentative Product Specification			Page No.	17/25
Document No.		Issue date	2020/03/27	Revision	00


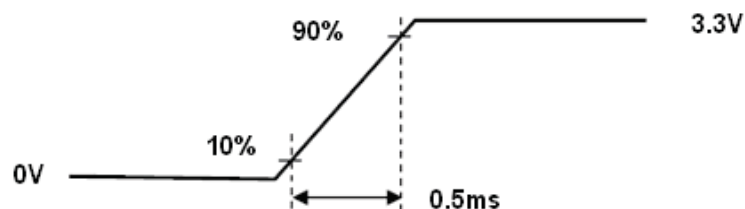


Figure 12 V_{DD} Rising Time


Note (6) The life time is determined as the sum of the lighting time till the luminance of LCD at the typical LED current reducing to 50% of the minimum value under normal operating condition.

Note (7) Definition of V_{LED} and P_{LED}

$$V_{LED} = V_F \times 9, I_{LED} = I_F \times 3, P_{LED} = V_{LED} \times I_{LED}$$

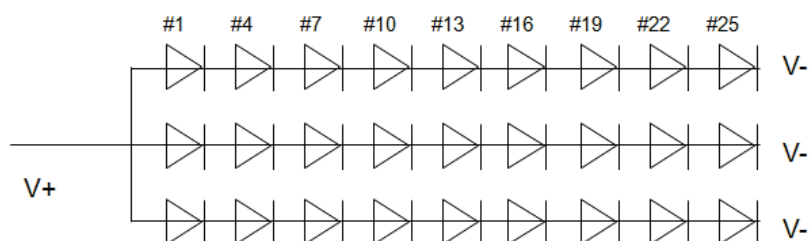

Note (8) The allowable forward current of LED vary with environmental temperature

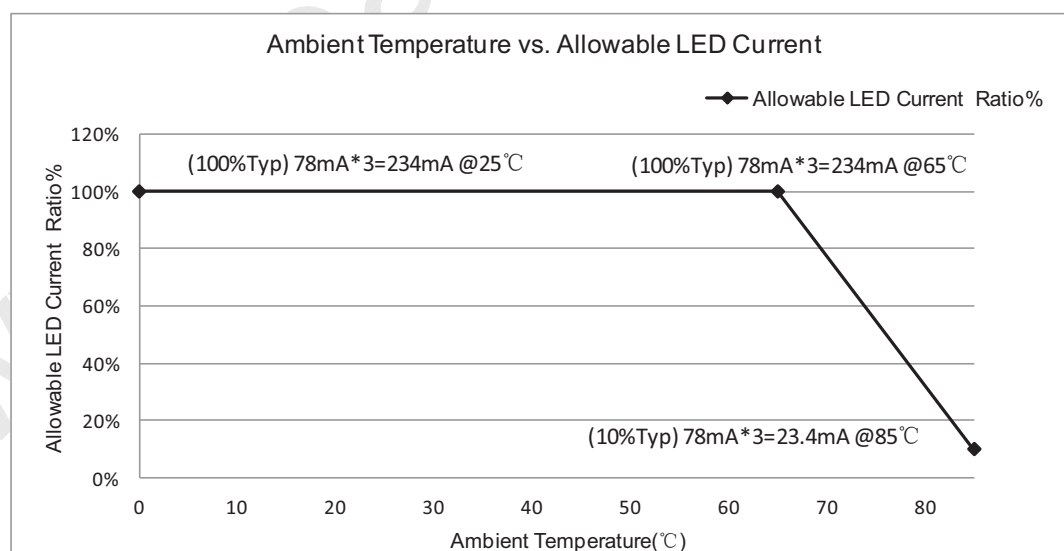



InfoVision Optoelectronics (Kunshan) Co.,LTD.

Document Title	M090AWA6 R0 Tentative Product Specification			Page No.	18/25
Document No.		Issue date	2020/03/27	Revision	00

4.5 Power ON/OFF Sequence

1. Interface signals are also shown in the chart. Signals from any system shall be Hi-resistance state or low level when VDD voltage is off.
2. When system first start up, should keep the VDD high time longer than 200ms, otherwise may cause image sticking when VDD drop off.

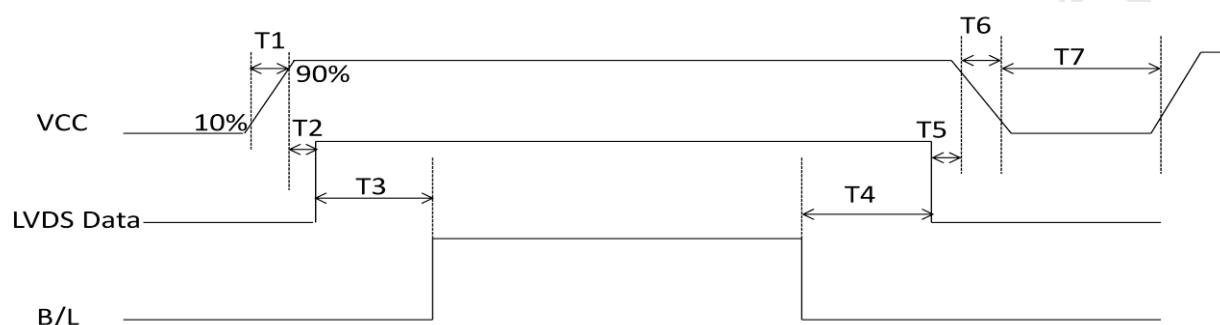


Figure 13 Power Sequence

Table 8 Power Sequencing Requirements

Parameter	Symbol	Min.	Typ.	Max.	Unit
VCC Rise Time	T1	(0.5)	-	(10)	ms
VCC Good to Signal Valid	T2	(0)	-	(50)	ms
Signal Valid to Backlight On	T3	(200)	-	-	ms
Backlight Power Off to Signal Disable	T4	(200)	-	-	ms
Signal Disable to Power Down	T5	(0)	-	(50)	ms
VCC Fall Time	T6	(0.5)	-	(30)	ms
VCC Power Off	T7	(500)	-	-	ms


InfoVision Optoelectronics (Kunshan) Co.,LTD.

Document Title	M090AWA6 R0 Tentative Product Specification			Page No.	19/25
Document No.		Issue date	2020/03/27	Revision	00

5.0 Mechanical Characteristics

5.1 Outline Drawing

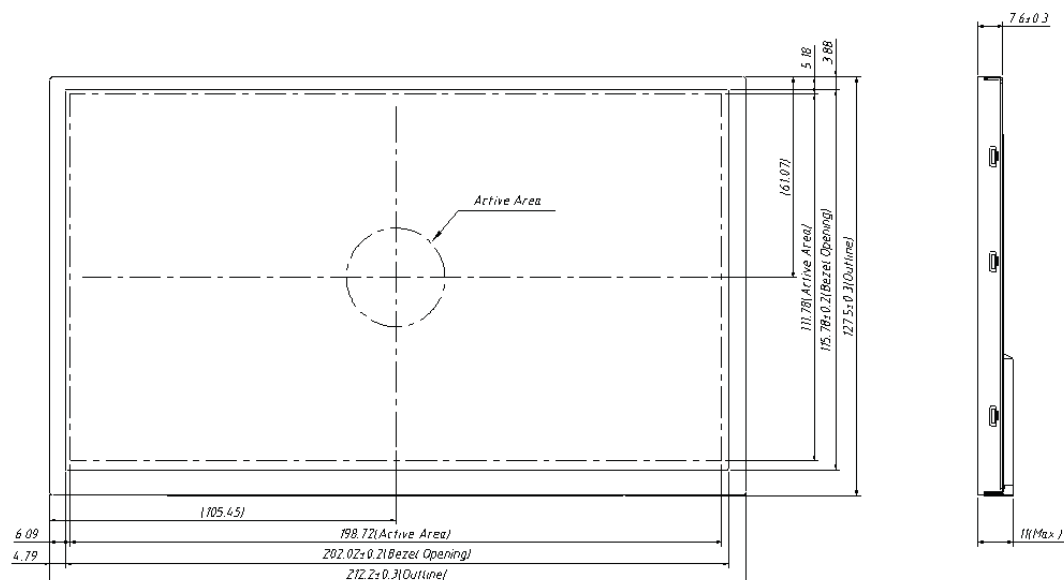


Figure 14 Reference Outline Drawing (Front Side)

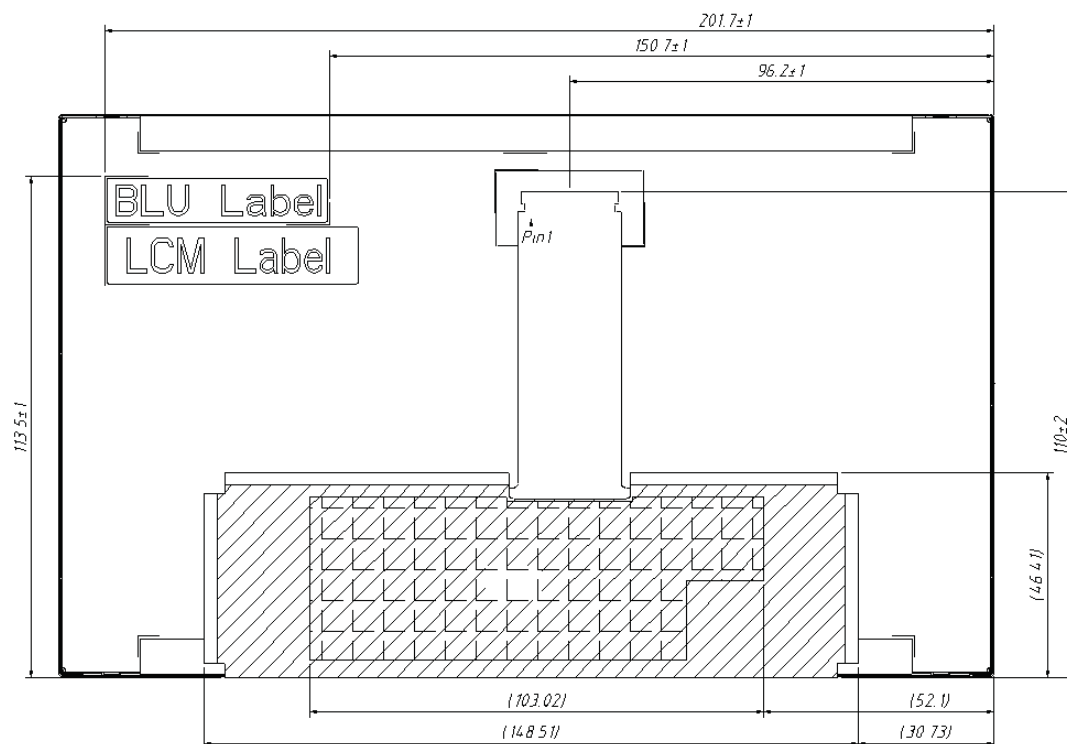


Figure 15 Reference Outline Drawing (Back Side)



InfoVision Optoelectronics (Kunshan) Co.,LTD.

Document Title	M090AWA6 R0 Tentative Product Specification			Page No.	20/25
Document No.		Issue date	2020/03/27	Revision	00

5.2 Dimension Specifications

Table 9 Module Dimension Specifications

Item		Min.	Typ.	Max.	Unit
Width		(211.9)	(212.2)	(212.5)	mm
Height		(127.2)	(127.5)	(127.8)	mm
Thickness	Without PCBA	(7.3)	(7.6)	(7.90)	mm
	With PCBA	-	(10.7)	(11.0)	mm
Weight		-	-	(328.3)	g
BM: a-b & c-d		-	-	≤(1.0)	mm

Note: Outline dimension measure instrument: Vernier Caliper.

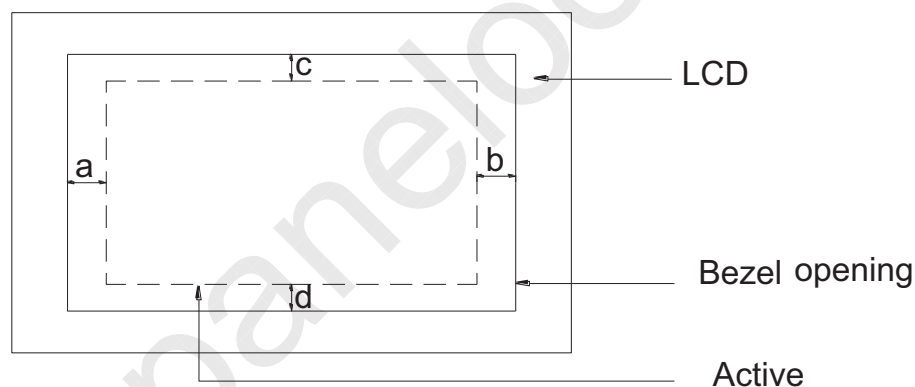


Figure 16 BM Area

**InfoVision Optoelectronics (Kunshan) Co.,LTD.**

Document Title	M090AWA6 R0 Tentative Product Specification			Page No.	21/25
Document No.		Issue date	2020/03/27	Revision	00

6.0 Reliability Conditions**Table 10 Reliability Condition**

Item		Package	Test Conditions		Note
High Temperature/High Humidity Operating Test		Module	T _{gs} =60℃, 90%RH, 500 hours		(1),(2),(3),(4)
High Temperature Operating Test		Module	T _{gs} =85℃, 500 hours		
Low Temperature Operating Test		Module	T _a =-30℃, 500 hours		
High Temperature Storage Test		Module	T _a =90℃, 500 hours		(1),(3),(4)
Low Temperature Storage Test		Module	T _a =-30℃, 240 hours		
Shock Non-operating Test		Module	100G, 6ms, ±X, ±Y, ±Z, 3times for each direction		(1),(3),(5)
Vibration Non-operating Test		Module	half-sine, Frequency: 8Hz ~ 33Hz, Stroke: 1.3mm, Sweep: 2.9G 33.3Hz ~ 400Hz X,Z , Cycle : 15 minutes, 2 hrs for each direction of X,Z , 4 hours for Y direction		
ESD Test	Operating	Module	Contact	±8KV, 150pF(330Ohm)	(1),(2),(6)
			Air	±15KV, 150pF(330Ohm)	

Note (1) A sample can only have one test. Outward appearance, image quality and optical data can only be checked at normal conditions according to the IVO document before reliable test. Only check the function of the module after reliability test.

Note (2) The setting of electrical parameters should follow the typical value before reliability test.

Note (3) During the test, it is unaccepted to have condensate water remains. Besides, protect the module from static electricity.

Note (4) The sample must be released for 24 hours under normal conditions before judging.


Furthermore, all the judgment must be made under normal conditions. Normal conditions are defined as follow: Temperature: 25°C , Humidity: $55\pm 10\%\text{RH}$. T_a = Ambient Temperature, T_{gs} = Glass Surface Temperature.

Note (5) The module should be fixed firmly in order to avoid twisting and bending.

Note (6) It could be regarded as pass, when the module recovers from function fault caused by ESD a few minutes later.

**InfoVision Optoelectronics (Kunshan) Co.,LTD.**

Document Title	M090AWA6 R0 Tentative Product Specification			Page No.	22/25
Document No.		Issue date	2020/03/27	Revision	00

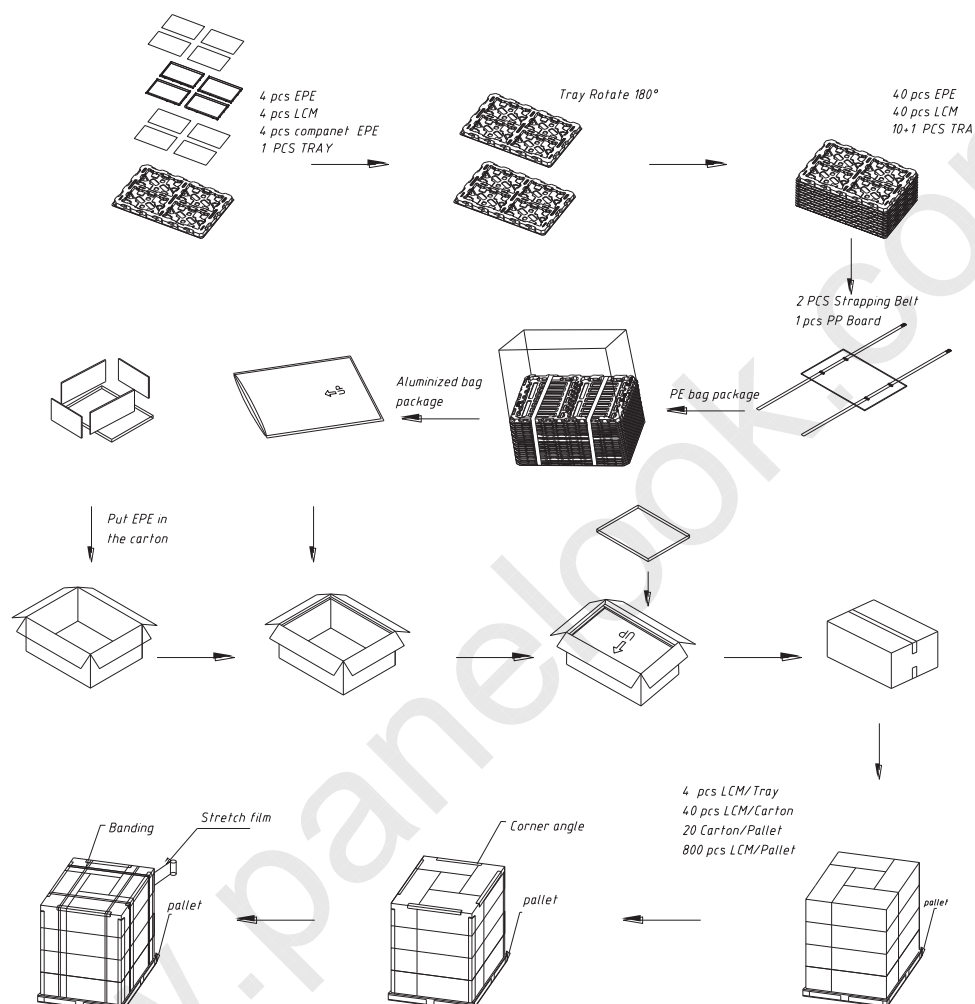7.0 Package Specification**Figure 17 Packing Method**

**InfoVision Optoelectronics (Kunshan) Co.,LTD.**

Document Title	M090AWA6 R0 Tentative Product Specification			Page No.	23/25
Document No.		Issue date	2020/03/27	Revision	00

8.0Lot Mark**TBD**

www.panelook.com

**InfoVision Optoelectronics (Kunshan) Co.,LTD.**

Document Title	M090AWA6 R0 Tentative Product Specification			Page No.	24/25
Document No.		Issue date	2020/03/27	Revision	00

9.0 General Precaution**9.1 Using Restriction**

This product is not authorized for using in life supporting systems, aircraft navigation control systems, military systems and any other appliance where performance failure could be life-threatening or lead to be catastrophic.

9.2 Operation Precaution

(1)The LCD product should be operated under normal conditions.

Normal conditions are defined as below:

Temperature: 25℃

Humidity: 55±10%

Display pattern: continually changing pattern (Not stationary)

(2) Brightness and response time depend on the temperature. (It needs more time to reach normal brightness in low temperature.)

(3) It is necessary for you to pay attention to condensation when the ambient temperature drops suddenly. Condensate water would damage the polarizer and electrical contacted parts of the module. Besides, smear or spot will remain after condensate water evaporating.

(4) If the absolute maximum rating value was exceeded, it may damage the module.

(5) Do not adjust the variable resistor located on the module.

(6) Sufficient suppression to the electromagnetic interference shall be done by system manufacturers. Grounding and shielding may be important to minimize the interference.

(7) Image sticking may occur when the module displayed the same pattern for long time.

(8) Do not connect or disconnect the module in the “power on” condition. Power supply should always be turned on/off by the “power on/off sequence”

(9) Ultra-violet ray filter is necessary for outdoor operation.

9.3 Mounting Precaution

(1) All the operators should be electrically grounded and with Ion-blown equipment turning on when mounting or handling. Dressing finger-stalls out of the gloves is important for keeping the panel clean during the incoming inspection and the process of assembly.

(2) It is unacceptable that the material of cover case contains acetic or chloric. Besides, any other material that could generate corrosive gas or cause circuit break by electro-chemical reaction is not desirable.

(3) The case on which a module is mounted should have sufficient strength so that external force is not transmitted to the module directly.

(4) It is obvious that you should adopt radiation structure to satisfy the temperature specification.

(5) So as to acquire higher luminance, the cable of the power supply should be connected directly with a minimize length.



IVO InfoVision Optoelectronics (Kunshan) Co.,LTD.

Document Title	M090AWA6 R0 Tentative Product Specification			Page No.	25/25
Document No.		Issue date	2020/03/27	Revision	00

(6) It should be attached to the system tightly by using all holes for mounting, when the module is assembled. Be careful not to apply uneven force to the module, especially to the PCB on the back.

(7) A transparent protective film needs to be attached to the surface of the module.

(8) Do not press or scratch the polarizer exposed with anything harder than HB pencil lead. In addition, don't touch the pin exposed with bare hands directly.

(9) Clean the polarizer gently with absorbent cotton or soft cloth when it is dirty.

(10) Wipe off saliva or water droplet as soon as possible. Otherwise, it may cause deformation and fading of color.

(11) Clean the panel gently with absorbent cotton or soft cloth when it is dirty. Ethanol(C_2H_5OH) is allowed to be used. Ketone (ex. Acetone), Toluene, Ethyl acid, Methyl chloride, etc are not allowed to be used for cleaning the panel, which might react with the polarizer to cause permanent damage.

(12) Do not disassemble or modify the module. It may damage sensitive parts in the LCD module, and cause scratches or dust remains. IVO does not warrant the module, if you disassemble or modify the module.

9.4 Handling Precaution

(1) Static electricity will generate between the film and polarizer, when the protection film is peeled off. It should be peeled off slowly and carefully by operators who are electrically grounded and with Ion-blown equipment turning on. Besides, it is recommended to peel off the film from the bonding area.

(2) The protection film is attached to the polarizer with a small amount of glue. When the module with protection film attached is stored for a long time, a little glue may remain after peeling.

(3) If the liquid crystal material leaks from the panel, keep it away from the eyes and mouth. In case of contact with hands, legs or clothes, it must be clean with soap thoroughly.

9.5 Storage Precaution

When storing modules as spares for long time, the following precautions must be executed.

(1) Store them in a dark place. Do not expose to sunlight or fluorescent light. Keep the temperature between $5^{\circ}C$ and $35^{\circ}C$ at normal humidity.

(2) The polarizer surface should not come in contact with any other object. It is recommended that they be stored in the container in which they were shipped.

(3) It is recommended to use it in a short-time period, after it's unpacked. Otherwise, we would not guarantee the quality.

9.6 Others

When disposing LCD module, obey the local environmental regulations.