

**PROPRIETARY NOTE**

THIS SPECIFICATION IS THE PROPERTY OF BOE DT AND SHALL NOT BE REPRODUCED OR COPIED WITHOUT THE WRITTEN PERMISSION OF BOE DT AND MUST BE RETURNED TO BOE DT UPON ITS REQUEST

TITLE : PV190E0M-N10**Product Specification****Rev.P0****BEIJING BOE Display TECHNOLOGY CO. LTD**

SPEC. NUMBER
S8-65-8A-263

PRODUCT GROUP
TFT-LCD

Rev.P0

ISSUE DATE
2019.01.11

PAGE
1 OF 29

A4(210 X 297)

**BOE****PRODUCT GROUP**

REV

ISSUE DATE

TFT- LCD PRODUCT

Rev.P0

2019.01.11

REVISION HISTORY

(●) Preliminary specification

() Final specification

Revision No.	Page	Description of changes	Date	Prepared
Rev.P0		Initial Release	2019.01.11	Jiang Han

SPEC. NUMBER

S8-65-8A-263

SPEC. TITLE

B4 PV190E0M-N10 Product Specification Rev.P0

PAGE

2 OF 29

A4(210 X 297)

**BOE****PRODUCT GROUP**

REV

ISSUE DATE

TFT- LCD PRODUCT

Rev.P0

2019.1.11

Contents

No.	Item	Page
1.0	General Description	4
2.0	Absolute Maximum Ratings	6
3.0	Electrical Specifications	7
4.0	Optical Specifications	9
5.0	Interface Connection	11
6.0	Signal Timing Specifications	14
7.0	Signal Timing Waveforms of Interface Signal	16
8.0	Input Signals, Display Colors & Gray Scale of Colors	18
9.0	Power Sequence	19
10.0	Mechanical Characteristics	20
11.0	Reliability Test	21
12.0	Handling& Cautions	22
13.0	Product Serial Number	23
14.0	Packing	24
15.0	Appendix	26

SPEC. NUMBER

S8-65-8A-263

SPEC. TITLE

B4 PV190E0M-N10 Product Specification Rev.P0

PAGE

3 OF 29

A4(210 X 297)

BOE**PRODUCT GROUP**

REV

ISSUE DATE

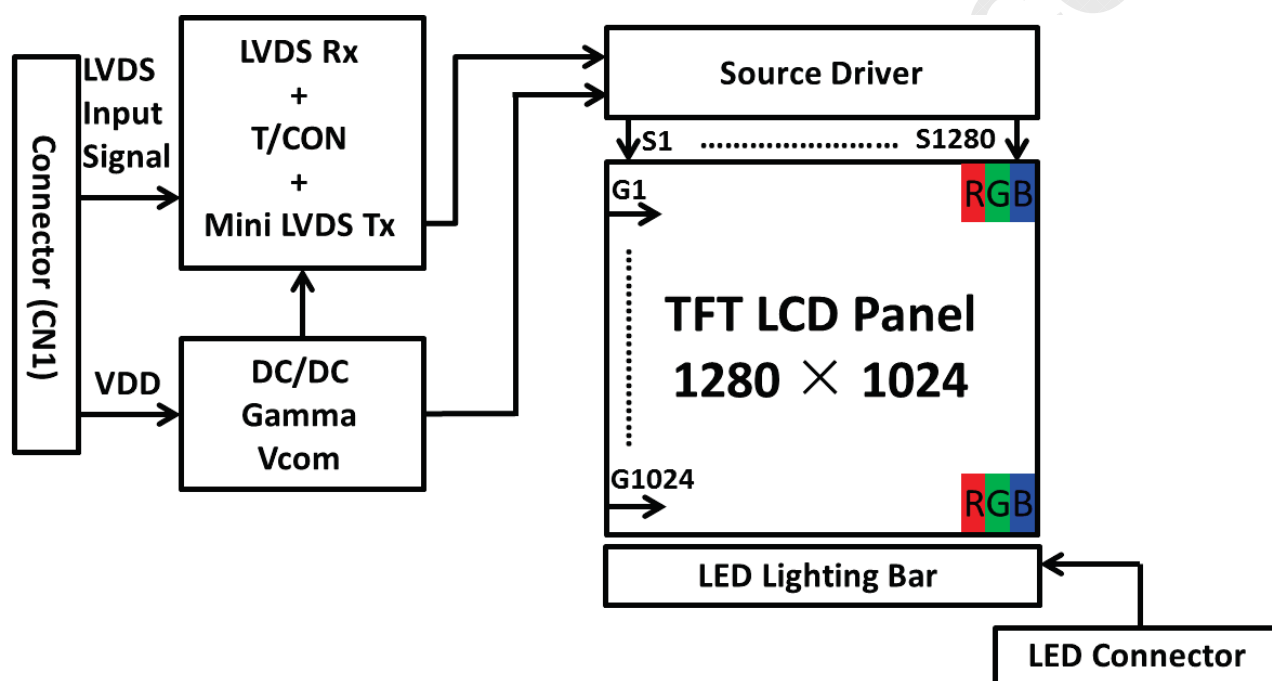
TFT- LCD PRODUCT

Rev.P0

2019.1.11

1.0 GENERAL DESCRIPTION**1.1 Introduction**

PV190E0M-N10 is a color active matrix TFT LCD module using amorphous silicon TFT's (Thin Film Transistors) as an active switching devices. This module has a 19 inch diagonally measured active area with SXGA resolutions 1280 horizontal by 1024 vertical pixel array). Each pixel is divided into RED, GREEN, BLUE dots which are arranged in vertical stripe and this module can display 16.7M colors. The TFT-LCD panel used for this module is adapted for a low reflection and higher color type.

**1.2 Features**

- LVDS Interface with 2 pixel / clock
- High-speed response
- 6-bit (Hi-FRC) color depth, display 16. 7M colors
- DE (Data Enable) only
- RoHS/Halogen Free
- Gamma Correction
- Forward type

SPEC. NUMBER
S8-65-8A-263

SPEC. TITLE
B4 PV190E0M-N10 Product Specification Rev.P0

PAGE
4 OF 29

A4(210 X 297)



PRODUCT GROUP

REV

ISSUE DATE

TFT- LCD PRODUCT

Rev.P0

2019.1.11

1.3 Application

- Smart payment、 POS & etc. Use
- Slim-Size Display for Stand-alone Monitor
- Display Terminals for Control System
- Monitors for Process Controller

1.4 General Specification

The followings are general specifications at the model PV190E0M-N10.

<Table 1. General Specifications>

Parameter	Specification	Unit	Remarks
Active area	374.784(H) × 299.827 (V)	mm	
Number of pixels	1280(H) × 1024(V)	pixels	
Pixel pitch	0.2928(H) × 0.2928(V)	mm	
Pixel arrangement	RGB Vertical stripe		
Display colors	16.7M	colors	
Display mode	Normally Black		
Dimensional outline	394.0(H) × 324.0(V) × 11.23(Body) /(11.63 Max.)	mm	Detail refer to drawing
Weight	1950 (Max.)	g	
Bezel width (L/R/U/D)	8.5/8.5/10.5/10.5	mm	
Surface Treatment	Haze 25%, 3H		
Back-light	Horizontal arranged, 1-LED Lighting Bar type		

SPEC. NUMBER
S8-65-8A-263

SPEC. TITLE
B4 PV190E0M-N10 Product Specification Rev.P0

PAGE
5 OF 29

A4(210 X 297)

BOE**PRODUCT GROUP**

REV

ISSUE DATE

TFT- LCD PRODUCT

Rev.P0

2019.1.11

2.0 ABSOLUTE MAXIMUM RATINGS

The followings are maximum values which, if exceed, may cause faulty operation or damage to the unit. The operational and non-operational maximum voltage and current values are listed in Table 2.

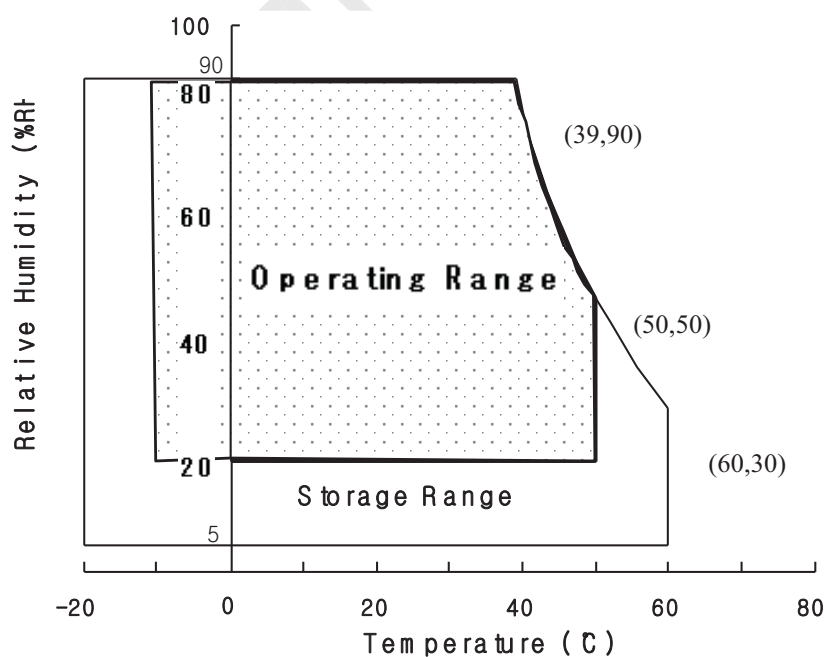
< Table 2. Absolute Maximum Ratings>

[VSS=GND=0V]

Parameter	Symbol	Min.	Max.	Unit	Remarks
Power Supply Voltage	V_{DD}	-0.3	6.0	V	Ta = 25 °C
Logic Supply Voltage	V_{IN}	VSS-0.3	$V_{DD}+0.3$	V	
Operating Temperature	T_{OP}	-10	+55	°C	1)
Storage Temperature	T_{ST}	-20	+60	°C	1)

Note : 1) Temperature and relative humidity range are shown in the figure below.

Wet bulb temperature should be 39 °C max. and no condensation of water.



SPEC. NUMBER
S8-65-8A-263

SPEC. TITLE
B4 PV190E0M-N10 Product Specification Rev.P0

PAGE
6 OF 29

A4(210 X 297)

BOE

PRODUCT GROUP

REV

ISSUE DATE

TFT- LCD PRODUCT

Rev.P0

2019.1.11

3.0 ELECTRICAL SPECIFICATIONS

3.1 Electrical Specifications

< Table 3. Electrical specifications >

[Ta =25 ± 2 °C]

Parameter.		Min.	Typ.	Max.	Unit	Remarks
Power Supply Voltage	V _{DD}	4.5	5.0	5.5	V	Note1
Power Supply Current	I _{DD}	-	600	1100	mA	
In-Rush Current	I _{RUSH}	-	2.0	3.0	A	Note 2
Permissible Input Ripple Voltage	V _{RF}	-	-	300	mV	Note1,3
High Level Differential Input Threshold Voltage	V _{IH}	-	-	+100	mV	
Low Level Differential Input Threshold Voltage	V _{IL}	-100	-	-	mV	
Differential input voltage	V _{ID}	200	-	600	mV	
Differential input common mode voltage	V _{cm}	1.0	1.2	1.5		V _{IH} =100mV, V _{IL} =-100mV
Power Consumption	P _D	-	3.0	5.5	W	Note 1
	P _{BL}	12.96	13.92	15.36	W	Note 4
	P _{total}	-	16.92	20.86	W	

Notes : 1. The supply voltage is measured and specified at the interface connector of LCM.

The current draw and power consumption specified is for VDD=5.0V, Frame rate=60Hz

Clock frequency = 74.25MHz. Test Pattern of power supply current



a) Typ : Color Test



b) Max : Vertical Sub Line 255

2. Duration of rush current is about 2 ms and rising time of VDD is 520 μs ± 20 %

3. Ripple Voltage should be covered by Input voltage Spec.

4. Calculated value for reference (Input pins*VPIN × IPIN) excluding inverter loss.

SPEC. NUMBER

S8-65-8A-263

SPEC. TITLE

B4 PV190E0M-N10 Product Specification Rev.P0

PAGE

7 OF 29

A4(210 X 297)

BOE**PRODUCT GROUP**

REV

ISSUE DATE

TFT- LCD PRODUCT

Rev.P0

2019.1.11

3.2 Backlight Unit

< Table 4. LED Backlight Unit >

Parameter		Min.	Typ.	Max.	Unit	Remarks
LED Light Bar Input Voltage Per Input Pin	V _{PIN}	27	29	32	V	Duty 100%
LED Light Bar Input Current Per Input Pin	I _{PIN}	-	120	-	mA	Note1,2
LED Power Consumption	P _{BL}	12.96	13.92	15.36	W	Note 3
LED Life-Time	-	50,000	-		Hrs	Note 4

LED bar consists of 40LED packages,4strings(parallel)*10packages(serial)

Note1: There are one light bar ,and the specified current is input LED chip 100% duty current

Note2: The sense current of each input pin is 120mA

Note3: $P_{BL}=4\text{Input pins} \times V_{PIN} \times I_{PIN}$

Note4: The lifetime is determined as the time at which luminance of LED become 50% of the initial brightness or not normal lighting at $I_{PIN}=120\text{mA}$ on condition of continuous operating at $25 \pm 2^\circ\text{C}$

SPEC. NUMBER
S8-65-8A-263

SPEC. TITLE
B4 PV190E0M-N10 Product Specification Rev.P0

PAGE
8 OF 29

A4(210 X 297)

BOE**PRODUCT GROUP**

REV

ISSUE DATE

TFT- LCD PRODUCT

Rev.P0

2019.1.11

4.0 OPTICAL SPECIFICATION**4.1 Overview**

The test of Optical specifications shall be measured in a dark room (ambient luminance ≤ 1 lux and temperature = $25 \pm 2^\circ\text{C}$) with the equipment of Luminance meter system (Goniometer system and TOPCONE PR730) and test unit shall be located at an approximate distance 50cm from the LCD surface at a viewing angle of θ and Φ equal to 0° . We refer to $\theta_{0=0}$ ($=\theta_3$) as the 3 o'clock direction (the "right"), $\theta_{0=90}$ ($=\theta_{12}$) as the 12 o'clock direction ("upward"), $\theta_{0=180}$ ($=\theta_9$) as the 9 o'clock direction ("left") and $\theta_{0=270}$ ($=\theta_6$) as the 6 o'clock direction ("bottom"). While scanning θ and/or Φ , the center of the measuring spot on the Display surface shall stay fixed. The measurement shall be executed after 30 minutes warm-up period. VDD shall be 5.0V $\pm 10\%$ at 25°C . Optimum viewing angle direction is 6 o'clock.

4.2 Optical Specifications[VDD = 5.0V, Frame rate = 60Hz, Clock = 74.25MHz, $I_{BL} = 480\text{mA}$, $T_a = 25 \pm 2^\circ\text{C}$]

Parameter		Symbol	Condition	Min.	Typ.	Max.	Unit	Remark
Viewing Angle range	Horizontal	Θ_3	CR > 10	85	89	-	Deg.	Note 1
		Θ_9		85	89	-	Deg.	
	Vertical	Θ_{12}		85	89	-	Deg.	
		Θ_6		85	89	-	Deg.	
Luminance Contrast ratio		CR	$\Theta = 0^\circ$ (Center) Normal Viewing Angle	700	1000			Note 2
Luminance of White		Y_w		350	400	-	cd/m ²	Note 3
White luminance uniformity		ΔY		75	-	-	%	Note 4
Reproduction of color	White	W_x		0.283	0.313	0.343	-	Note 5
		W_y		0.299	0.329	0.359	-	
	Red	R_x		TBD	TBD	TBD	-	
		R_y		TBD	TBD	TBD	-	
	Green	G_x		TBD	TBD	TBD	-	
		G_y		TBD	TBD	TBD	-	
	Blue	B_x		TBD	TBD	TBD	-	
		B_y		TBD	TBD	TBD	-	
Response Time	GTG	T_g			14	20	ms	Note 6

SPEC. NUMBER
S8-65-8A-263SPEC. TITLE
B4 PV190E0M-N10 Product Specification Rev.P0PAGE
9 OF 29

A4(210 X 297)

BOE**PRODUCT GROUP**

REV

ISSUE DATE

TFT- LCD PRODUCT

Rev.P0

2019.1.11

Note :

1. Viewing angle is the angle at which the contrast ratio is greater than 10. The viewing are determined for the horizontal or 3, 9 o'clock direction and the vertical or 6, 12 o'clock direction with respect to the optical axis which is normal to the LCD surface.
2. Contrast measurements shall be made at viewing angle of $\theta = 0^\circ$ and at the center of the LCD surface. Luminance shall be measured with all pixels in the view field set first to white, then to the dark (black) state. (See FIGURE 1 shown in Appendix) Luminance Contrast Ratio (CR) is defined mathematically.

$$CR = \frac{\text{Luminance when displaying a white raster}}{\text{Luminance when displaying a black raster}}$$

3. Center Luminance of white is defined as the LCD surface. Luminance shall be measured with all pixels in the view field set first to white. This measurement shall be taken at the locations shown in FIGURE 2 for a total of the measurements per display.
4. The White luminance uniformity on LCD surface is then expressed as :

$$\Delta Y = (\text{Minimum Luminance of 9points} / \text{Maximum Luminance of 9points}) * 100$$
 (See FIGURE 2 shown in Appendix).
5. The color chromaticity coordinates specified in Table 4. shall be calculated from the spectral data measured with all pixels first in red, green, blue and white. Measurements shall be made at the center of the panel.
6. Response time Tg is the average time required for display transition by switching the input signal as below table and is based on Frame rate fV =60Hz to optimize.
 Each time in below table is defined as Figure 3and shall be measured by switching the input signal for “any level of gray(bright)”and “any level of gray(dark)”.
7. Cross-Talk of one area of the LCD surface by another shall be measured by comparing the luminance (Y_A) of a 25mm diameter area, with all display pixels set to a gray level, to the luminance (Y_B) of that same area when any adjacent area is driven dark. (See FIGURE 4 shown in Appendix).

SPEC. NUMBER
S8-65-8A-263

SPEC. TITLE
B4 PV190E0M-N10 Product Specification Rev.P0

PAGE
10 OF 29

A4(210 X 297)

BOE**PRODUCT GROUP**

REV

ISSUE DATE

TFT- LCD PRODUCT

Rev.P0

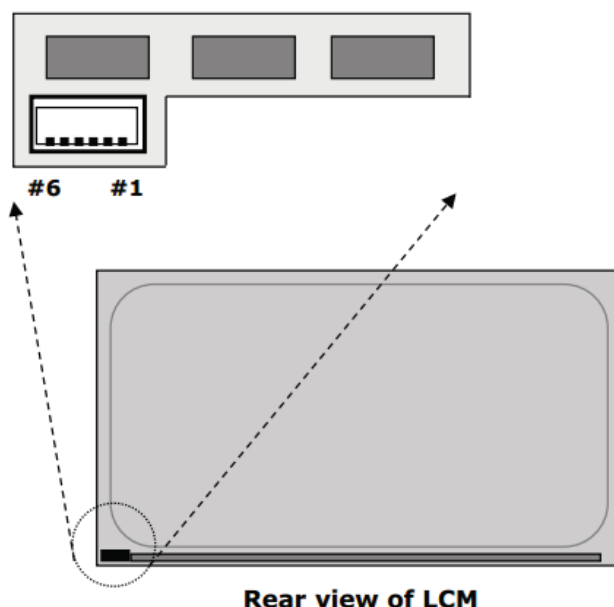
2019.1.11

5.0 INTERFACE CONNECTION.**5.1 Electrical Interface Connection****5.1.1 LED Light Bar**

-LED connector: 3707K-S06N-00L3 or EQUIVALENT

< Table 1. LED Light Bar >

Pin No	Symbol	Description
1	IRLED1	LED current sense for string1
2	IRLED2	LED current sense for string2
3	VLED	LED power supply
4	VLED	LED power supply
5	IRLED3	LED current sense for string3
6	IRLED4	LED current sense for string4

**Rear view of LCM**SPEC. NUMBER
S8-65-8A-263SPEC. TITLE
B4 PV190E0M-N10 Product Specification Rev.P0PAGE
11 OF 29

A4(210 X 297)

BOE**PRODUCT GROUP**

REV

ISSUE DATE

TFT- LCD PRODUCT

Rev.P0

2019.1.11

5.0 INTERFACE CONNECTION.**5.1 Electrical Interface Connection**

- CN101 Module Side Connector : UJU IS100-L30O-C23or Equivalent
User Side Connector : JAE FI-X30H or Equivalent

Pin No	Symbol	Function	Remark
1	RXO0-	Negative Transmission data of Pixel 0 (ODD)	
2	RXO0+	Positive Transmission data of Pixel 0 (ODD)	
3	RXO1-	Negative Transmission data of Pixel 1 (ODD)	
4	RXO1+	Positive Transmission data of Pixel 1 (ODD)	
5	RXO2-	Negative Transmission data of Pixel 2 (ODD)	
6	RXO2+	Positive Transmission data of Pixel 2 (ODD)	
7	BIST	Bist function	Note 1
8	RXOC-	Negative Transmission Clock (ODD)	
9	RXOC+	Positive Transmission Clock (ODD)	
10	RXO3-	Negative Transmission data of Pixel 3 (ODD)	
11	RXO3+	Positive Transmission data of Pixel 3 (ODD)	
12	RXE0-	Negative Transmission data of Pixel 0 (EVEN)	
13	RXE0+	Positive Transmission data of Pixel 0 (EVEN)	
14	GND	Power Ground	
15	RXE1-	Negative Transmission data of Pixel 1 (EVEN)	
16	RXE1+	Positive Transmission data of Pixel 1 (EVEN)	
17	GNG	Power Ground	
18	RXE2-	Negative Transmission data of Pixel 2 (EVEN)	
19	RXE2+	Positive Transmission data of Pixel 2 (EVEN)	
20	RXEC-	Negative Transmission Clock (EVEN)	
21	RXEC+	Positive Transmission Clock (EVEN)	
22	RXE3-	Negative Transmission data of Pixel 3 (EVEN)	
23	RXE3+	Positive Transmission data of Pixel 3 (EVEN)	
24	GND	Power Ground	Note 2
25	NC	*Reserved for LCD manufacturer's use (CTL_DVR)	
26	NC	*Reserved for LCD manufacturer's use (CE_DVR)	
27	NC	No Connection	
28	VDD	Power Supply: +5V	
29	VDD		
30	VDD		

Note 1: H: White-Black-Red-Green-Blue Pattern Aging, L: Black Pattern, when no LVDS signal.

Note 2: This pin should be connected with GND.

SPEC. NUMBER

S8-65-8A-263

SPEC. TITLE

B4 PV190E0M-N10 Product Specification Rev.P0

PAGE

12 OF 29

A4(210 X 297)

**BOE****PRODUCT GROUP**

REV

ISSUE DATE

TFT- LCD PRODUCT

Rev.P0

2019.1.11

5.2 LVDS Interface (Tx; THC63LVDF83A or Equivalent)**5.2.1 LVDS Interface**

	Input Signal	Transmitter		Interface		HT236F01-100 (CN11)	Remark
		Pin No.	Pin No.	System (Tx)	TFT-LCD (Rx)	Pin No.	
L V D S	OR0	51	48 47	OUT0- OUT0+	RXO0- RXO0+	1 2	
	OR1	52					
	OR2	54					
	OR3	55					
	OR4	56					
	OR5	3					
	OG0	4					
	OG1	6	46 45	OUT1- OUT1+	RXO1- RXO1+	3 4	
	OG2	7					
	OG3	11					
	OG4	12					
	OG5	14					
	OB0	15					
	OB1	19					
	OB2	20	42 41	OUT2- OUT2+	RXO2- RXO2+	5 6	
	OB3	22					
	OB4	23					
	OB5	24					
	Hsync	27					
	Vsync	28					
	DE	30					
	MCLK	31	40 39	CLK OUT- CLK OUT+	RXO CLK- RXO CLK+	8 9	
	OR6	50	38 37	OUT3- OUT3+	RXO3- RXO3+	10 11	
	OR7	2					
	OG6	8					
	OG7	10					
	OB6	16					
	OB7	18					
	RSVD	25					

Note: The order of even data is same with odd data.

SPEC. NUMBER

S8-65-8A-263

SPEC. TITLE

B4 PV190E0M-N10 Product Specification Rev.P0

PAGE

13 OF 29

A4(210 X 297)

**BOE****PRODUCT GROUP**

REV

ISSUE DATE

TFT- LCD PRODUCT

Rev.P0

2019.1.11

6.0 SIGNAL TIMING SPECIFICATION**6.1** The PV190E0M-N10 is operated by the DE only.

Item		Symbols	Min	Typ	Max	Unit
Clock	Frequency	1/Tc	45	54	67.5	MHz
	High Time	Tch	-	4/7Tc	-	
	Low Time	Tcl	-	3/7Tc	-	
Frame Period		Tv	1036	1066	1096	lines
			50	60	75	Hz
			20	16.7	13.3	ms
Vertical Display Period		Tvd	-	1024	-	lines
One line Scanning Period		Th	704	844	960	clocks
Horizontal Display Period		Thd	640	640	640	clocks

SPEC. NUMBER
S8-65-8A-263SPEC. TITLE
B4 PV190E0M-N10 Product Specification Rev.P0PAGE
14 OF 29

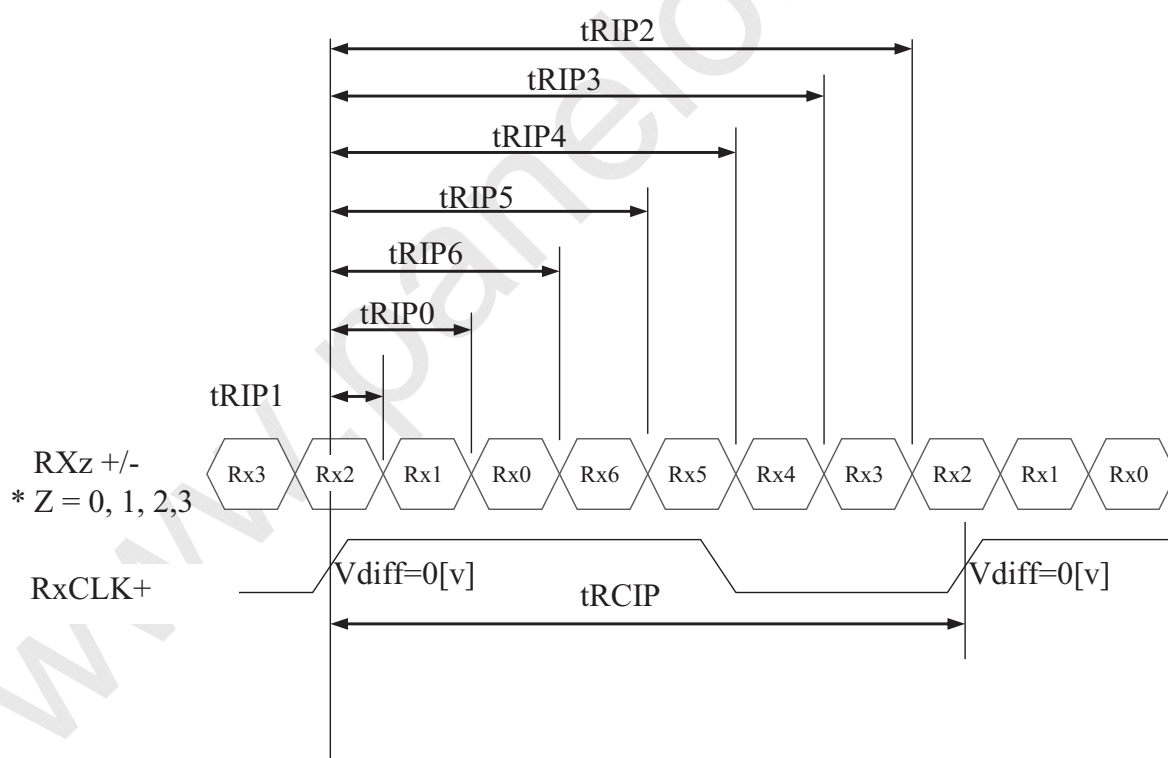
A4(210 X 297)

6.2 LVDS Rx Interface Timing Parameter

The specification of the LVDS Rx interface timing parameter is shown in Table 4.

<Table 4. LVDS Rx Interface Timing Specification>

Item	Symbol	Min	Typ	Max	Unit	Remark
CLKIN Period	tRCIP	10.20	13.47	17.08	nsec	
Input Data 0	tRIP1	-0.4	0.0	+0.4	nsec	
Input Data 1	tRIP0	tRCIP/7-0.4	tRCIP/7	tRCIP/7+0.4	nsec	
Input Data 2	tRIP6	$2 \times tRCIP/7-0.4$	$2 \times tRCIP/7$	$2 \times tRCIP/7+0.4$	nsec	
Input Data 3	tRIP5	$3 \times tRCIP/7-0.4$	$3 \times tRCIP/7$	$3 \times tRCIP/7+0.4$	nsec	
Input Data 4	tRIP4	$4 \times tRCIP/7-0.4$	$4 \times tRCIP/7$	$4 \times tRCIP/7+0.4$	nsec	
Input Data 5	tRIP3	$5 \times tRCIP/7-0.4$	$5 \times tRCIP/7$	$5 \times tRCIP/7+0.4$	nsec	
Input Data 6	tRIP2	$6 \times tRCIP/7-0.4$	$6 \times tRCIP/7$	$6 \times tRCIP/7+0.4$	nsec	



* Vdiff = (RXz+)-(RXz-),..., (RXCLK+)-(RXCLK-)

BOE**PRODUCT GROUP**

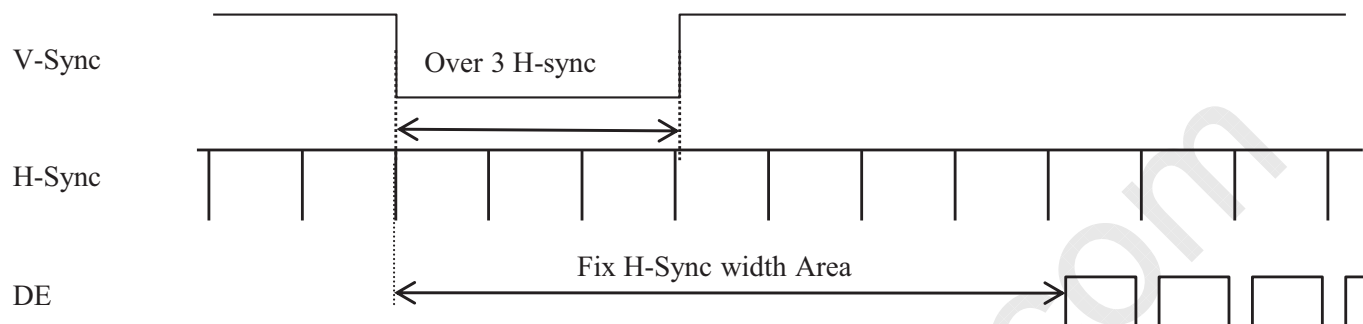
REV

ISSUE DATE

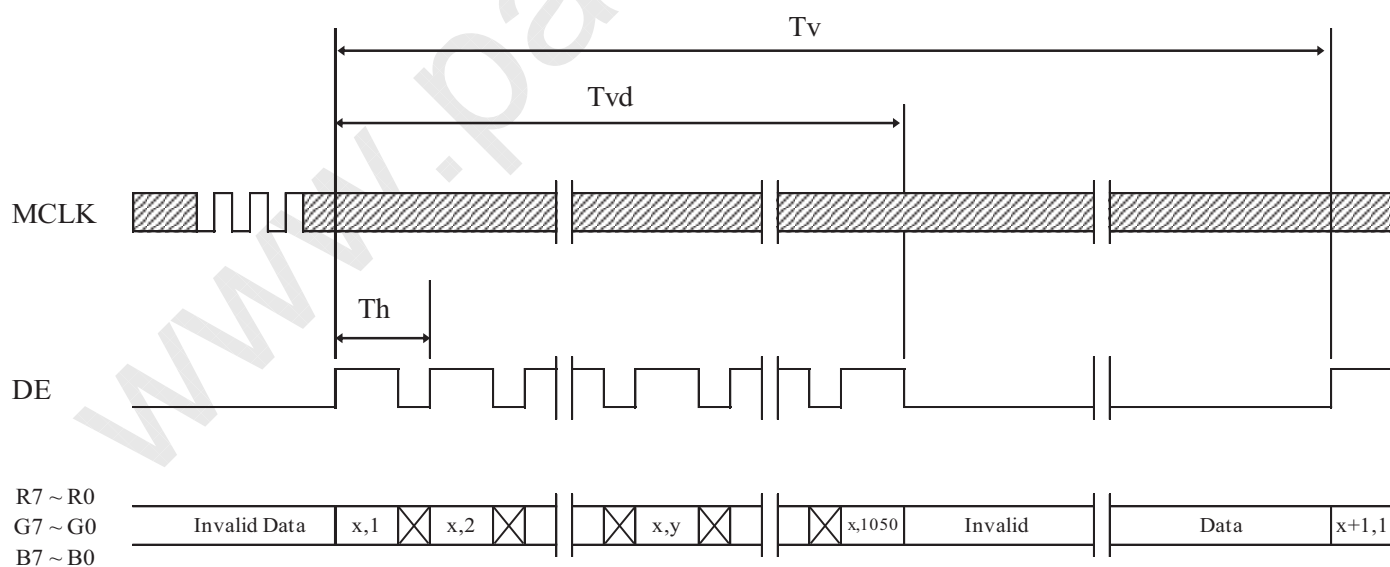
TFT- LCD PRODUCT

Rev.P0

2019.1.11

7.0 SIGNAL TIMING WAVEFORMS OF INTERFACE SIGNAL**7.1 Sync Timing Waveforms**

- 1) Need over 3 H-sync during V-Sync Low
- 2) Fix H-Sync width from V-Sync falling edge to first rising edge

7.2 Vertical Timing Waveforms

SPEC. NUMBER
S8-65-8A-263

SPEC. TITLE
B4 PV190E0M-N10 Product Specification Rev.P0

PAGE
16 OF 29

A4(210 X 297)

BOE**PRODUCT GROUP**

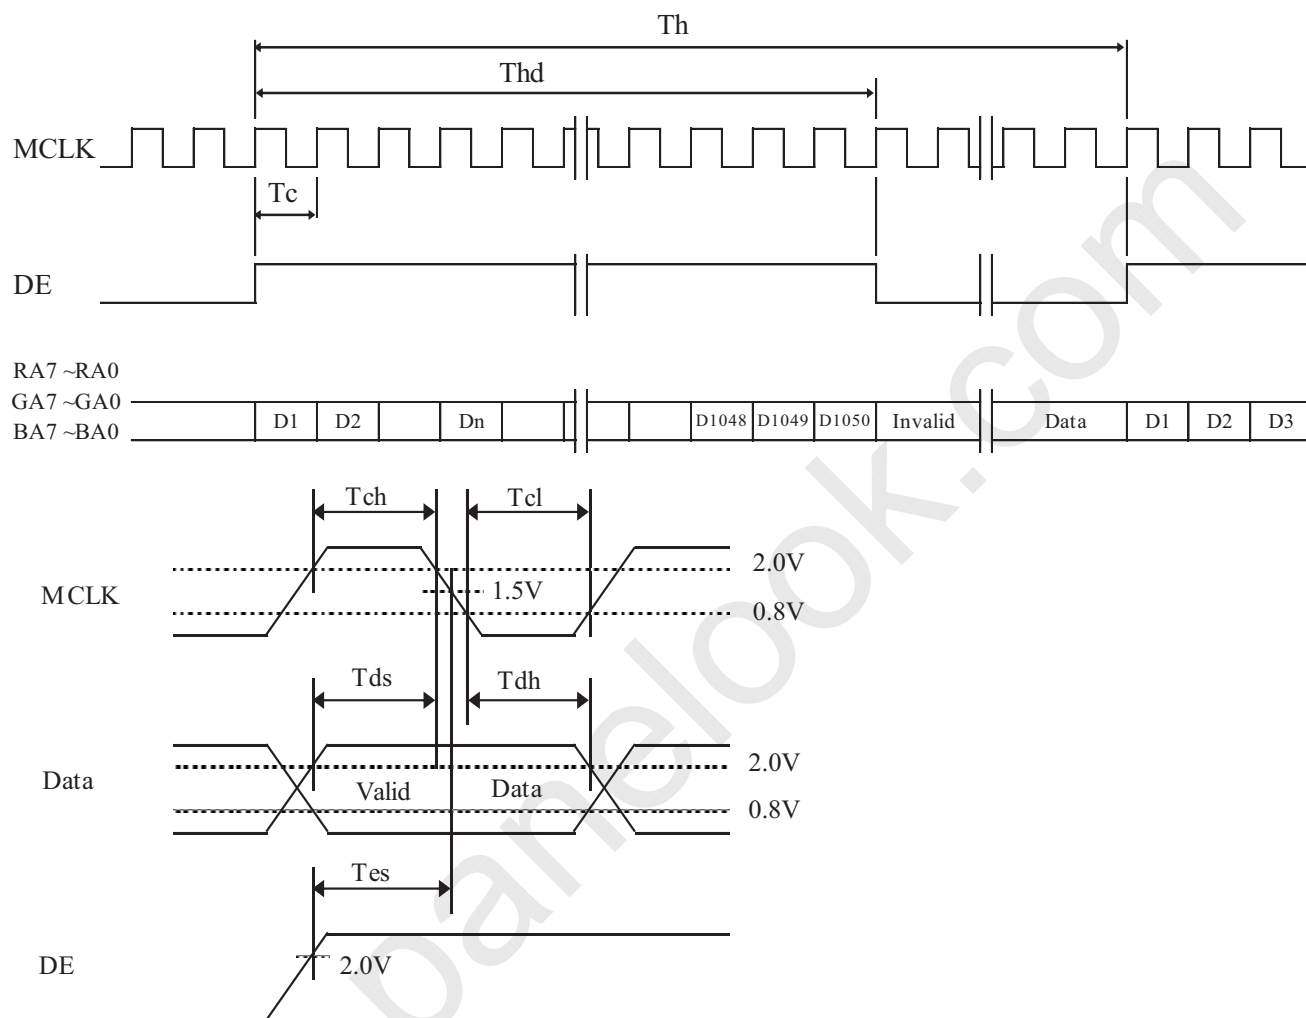
REV

ISSUE DATE

TFT- LCD PRODUCT

Rev.P0

2019.1.11

7.3 Horizontal Timing Waveforms

SPEC. NUMBER

S8-65-8A-263

SPEC. TITLE

B4 PV190E0M-N10 Product Specification Rev.P0

PAGE

17 OF 29

A4(210 X 297)

BOE**PRODUCT GROUP**

REV

ISSUE DATE

TFT- LCD PRODUCT

Rev.P0

2019.1.11

8.0 INPUT SIGNALS, BASIC DISPLAY COLORS & GRAY SCALE OF COLORS

Color & Gray Scale		RED DATA								GREEN DATA								BLUE DATA							
		R7	R6	R5	R4	R3	R2	R1	R0	G7	G6	G5	G4	G3	G2	G1	G0	B7	B6	B5	B4	B3	B2	B1	B0
Basic Colors	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Blue	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1
	Green	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
	Cyan	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
	Red	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Magenta	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1
	Yellow	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
	White	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Gray Scale of RED	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	△	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Darker	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	△	↑								↑								↑							
	▽	↓								↓								↓							
	Brighter	1	1	1	1	1	1	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	▽	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Gray Scale of GREEN	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	△	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0
	Darker	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0
	△	↑								↑								↑							
	▽	↓								↓								↓							
	Brighter	0	0	0	0	0	0	0	0	1	1	1	1	1	1	0	1	0	0	0	0	0	0	0	0
	▽	0	0	0	0	0	0	0	0	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0
	Green	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
Gray Scale of BLUE	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	△	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1
	Darker	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0
	△	↑								↑								↑							
	▽	↓								↓								↓							
	Brighter	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	0	1
	▽	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	0	0
	Blue	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1
Gray Scale of WHITE	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	△	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	1
	Darker	0	0	0	0	0	0	1	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	1	0
	△	↑								↑								↑							
	▽	↓								↓								↓							
	Brighter	1	1	1	1	1	1	0	1	1	1	1	1	1	1	0	1	1	1	1	1	1	1	0	1
	▽	1	1	1	1	1	1	0	1	1	1	1	1	1	1	0	1	1	1	1	1	1	1	0	0
	White	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1

SPEC. NUMBER

S8-65-8A-263

SPEC. TITLE

B4 PV190E0M-N10 Product Specification Rev.P0

PAGE

18 OF 29

A4(210 X 297)

BOE**PRODUCT GROUP**

REV

ISSUE DATE

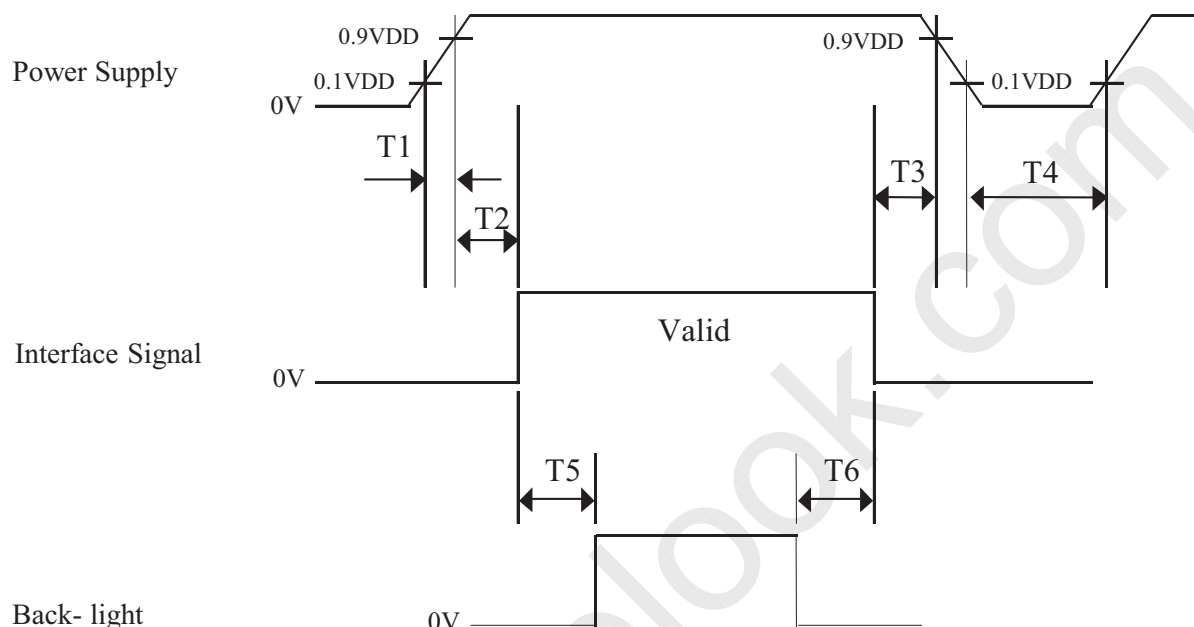
TFT- LCD PRODUCT

Rev.P0

2019.1.11

9.0 POWER SEQUENCE

To prevent a latch-up or DC operation of the LCD module, the power on/off sequence shall be as shown in below.



- $0.5\text{ ms} \leq T1 \leq 10\text{ ms}$
- $0 \leq T2 \leq 50\text{ ms}$
- $0 < T3 \leq 50\text{ ms}$
- $1\text{ sec} \leq T4$
- $200\text{ ms} \leq T5$
- $200\text{ ms} \leq T6$

Notes:

1. When the power supply VDD is 0V, keep the level of input signals on the low or keep high impedance.
2. Do not keep the interface signal high impedance when power is on.
3. Back Light must be turn on after power for logic and interface signal are valid.
4. T7 decreases smoothly, there is none re-bouncing voltage.
5. If $T3=0\text{ms}$, there is a risk of flicker when power On/Off.
6. If $T6=0\text{ms}$, there is a risk of abnormal display when power off.

SPEC. NUMBER
S8-65-8A-263

SPEC. TITLE
B4 PV190E0M-N10 Product Specification Rev.P0

PAGE
19 OF 29

A4(210 X 297)



PRODUCT GROUP

REV

ISSUE DATE

TFT- LCD PRODUCT

Rev.P0

2019.1.11

10.0 MECHANICAL CHARACTERISTICS

10.1 Dimensional Requirements

FIGURE 6 (located in Appendix) shows mechanical outlines for the model PV190E0M-N10. Other parameters are shown in Table 5.

<Table 5. Dimensional Parameters>

Parameter	Specification	Unit
Dimensional outline	394.0(H) × 324.0(V) × 11.23(Body) /(11.63 Max.)	mm
Weight	1950 (Max.)	gram
Active area	374.784(H) × 299.827(V)	mm
Pixel pitch	0.2928(H) × 0.2928(V)	mm
Number of pixels	1280 (H) × 1024 (V) (1 pixel = R + G + B dots)	pixels
Back-light	Horizontal arranged, 1-LED Lighting Bar type	

10.2 Mounting

See FIGURE 5. (shown in Appendix)

10.3 Anti-Glare and Polarizer Hardness.

The surface of the LCD has an anti-glare coating to minimize reflection and a coating to reduce scratching.

10.4 Light Leakage

There shall not be visible light from the back-lighting system around the edges of the screen as seen from a distance 50cm from the screen with an overhead light level of 350lux.

SPEC. NUMBER
S8-65-8A-263

SPEC. TITLE
B4 PV190E0M-N10 Product Specification Rev.P0

PAGE
20 OF 29

A4(210 X 297)



PRODUCT GROUP

REV

ISSUE DATE

TFT- LCD PRODUCT

Rev.P0

2019.1.11

11.0 RELIABILITY TEST

The Reliability test items and its conditions are shown in below.

<Table 6. Reliability Test Parameters >

No	Test Items	Conditions	
1	High temperature storage test	Ta = 60 °C , 240 hrs	
2	Low temperature storage test	Ta = -20 °C , 240 hrs	
3	High temperature & high humidity operation test	Ta = 50 °C , 80%RH, 240hrs	
4	High temperature operation test	Ta = 55 °C , 240hrs	
5	Low temperature operation test	Ta = -10°C , 240hrs	
6	Thermal shock	Ta = -20 °C ↔ 60 °C (0.5 hr), 100 cycle	
7	Vibration test (non-operating)	Frequency	Random, 10 ~ 300 Hz, 30 min/Axis
		Gravity\AMP	1.5 Grms
		Period	X, Y, Z 30 min
8	Shock test (non-operating)	Gravity	50G
		Pulse width	11msec, sine wave
		Direction	± X, ± Y, ± Z Once for each
9	Electro-static discharge test	Air : 150 pF, 330Ω, 15 KV Contact : 150 pF, 330Ω, 8 KV	

SPEC. NUMBER
S8-65-8A-263

SPEC. TITLE
B4 PV190E0M-N10 Product Specification Rev.P0

PAGE
21 OF 29

A4(210 X 297)



PRODUCT GROUP

REV

ISSUE DATE

TFT- LCD PRODUCT

Rev.P0

2019.1.11

12.0 HANDLING & CAUTIONS**(1) Cautions when taking out the module**

- Pick the pouch only, when taking out module from a shipping package.

(2) Cautions for handling the module

- As the electrostatic discharges may break the LCD module, handle the LCD module with care. Peel a protection sheet off from the LCD panel surface as slowly as possible.
- As the LCD panel and back - light element are made from fragile glass material, impulse and pressure to the LCD module should be avoided.
- As the surface of the polarizer is very soft and easily scratched, use a soft dry cloth without chemicals for cleaning.
- Do not pull the interface connector in or out while the LCD module is operating.
- Put the module display side down on a flat horizontal plane.
- Handle connectors and cables with care.

(3) Cautions for the operation

- When the module is operating, do not lose CLK, ENAB signals. If any one of these signals is lost, the LCD panel would be damaged.
- Obey the supply voltage sequence. If wrong sequence is applied, the module would be damaged.

(4) Cautions for the atmosphere

- Dew drop atmosphere should be avoided.
- Do not store and/or operate the LCD module in a high temperature and/or humidity atmosphere. Storage in an electro-conductive polymer packing pouch and under relatively low temperature atmosphere is recommended.

(5) Cautions for the module characteristics

- Do not apply fixed pattern data signal to the LCD module at product aging.
- Applying fixed pattern for a long time may cause image sticking.

(6) Other cautions

- Do not disassemble and/or re-assemble LCD module.
- Do not re-adjust variable resistor or switch etc.
- When returning the module for repair or etc., Please pack the module not to be broken. We recommend to use the original shipping packages.

SPEC. NUMBER

S8-65-8A-263

SPEC. TITLE

B4 PV190E0M-N10 Product Specification Rev.P0

PAGE

22 OF 29

A4(210 X 297)

BOE

PRODUCT GROUP

REV

ISSUE DATE

TFT- LCD PRODUCT

Rev.P0

2019.1.11

13.0 PRODUCT SERIAL NUMBER


DP/N PV190E0M-N10 B4

XXXXXX

**BOE**

XXXX

XXXXXXXXXXXXXXXXXXXXXX



REV XXX


CCO
 RoHS Compliant

UL
 cULUS

MADE IN CHINA

XX-XXXXXX-XXXXX-XXX-XXXX

1

X	X
---	---

2

X

3

X

4

X	X
---	---

5

X

6

X	X	X	X
---	---	---	---

7

X	X	X	X	X	X	X
---	---	---	---	---	---	---

1. Control Number

2. Rank / Grade

3. Line Classification

4. Year (2001 : 01, 2002 : 02, ...)

5. Month (1,2,3, ... , 9, X, Y, Z)

6. Internal Use

7. Serial Number

SPEC. NUMBER

S8-65-8A-263

SPEC. TITLE

B4 PV190E0M-N10 Product Specification Rev.P0

PAGE

23 OF 29

A4(210 X 297)

BOE**PRODUCT GROUP**

REV

ISSUE DATE

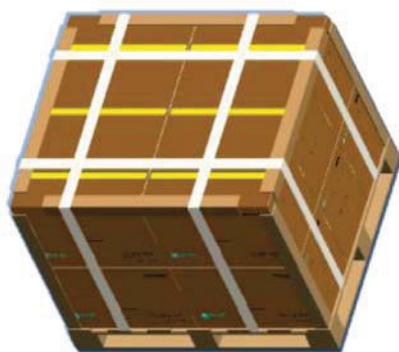
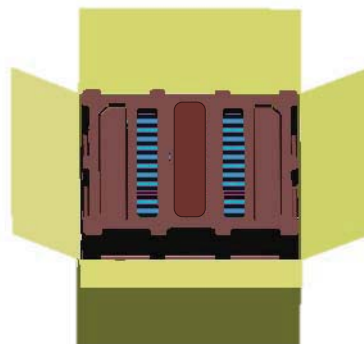
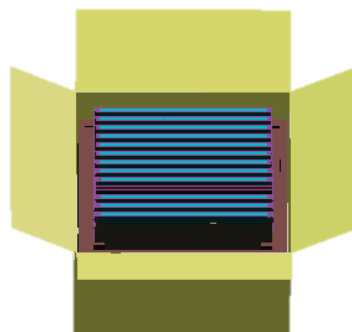
TFT- LCD PRODUCT

Rev.P0

2019.1.11

14.0 Packing**14.1 Packing Order**

Put 1 EPO bottom into the inner box.

Put each module into a PE bag.
Insert 13 Pcs MDL into each boxPlace paper corners and wrap film around the boxes.
Pack with 4 packing belts. (12ea boxes per ballet)

Put 1 EPO cover in and seal the box.

SPEC. NUMBER
S8-65-8A-263SPEC. TITLE
B4 PV190E0M-N10 Product Specification Rev.P0PAGE
24 OF 29

A4(210 X 297)

BOE**PRODUCT GROUP**

REV

ISSUE DATE

TFT- LCD PRODUCT

Rev.P0

2019.1.11

14.2 Packing Note

- Box Dimension : 464mm(W) × 360mm(L) × 385mm(H)
- Package Quantity in one Box : 13pcs

14.3 Box label

- Label Size : 108 mm (L) × 56 mm (W)
- Contents

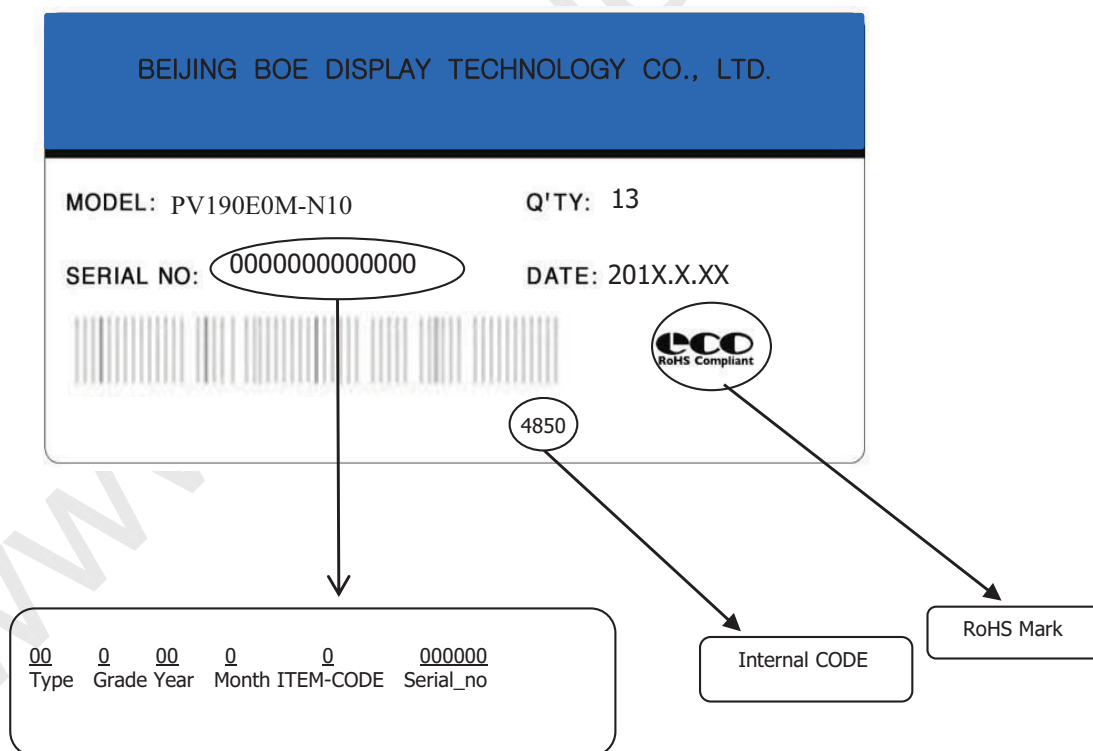
Model : PV190E0M-N10

Q'ty : Module 13 Q'ty in one box

Serial No. : Box Serial No. See next page for detail description.

Date : Packing Date

FG Code : FG Code of Product



SPEC. NUMBER

S8-65-8A-263

SPEC. TITLE

B4 PV190E0M-N10 Product Specification Rev.P0

PAGE

25 OF 29

A4(210 X 297)

BOE**PRODUCT GROUP**

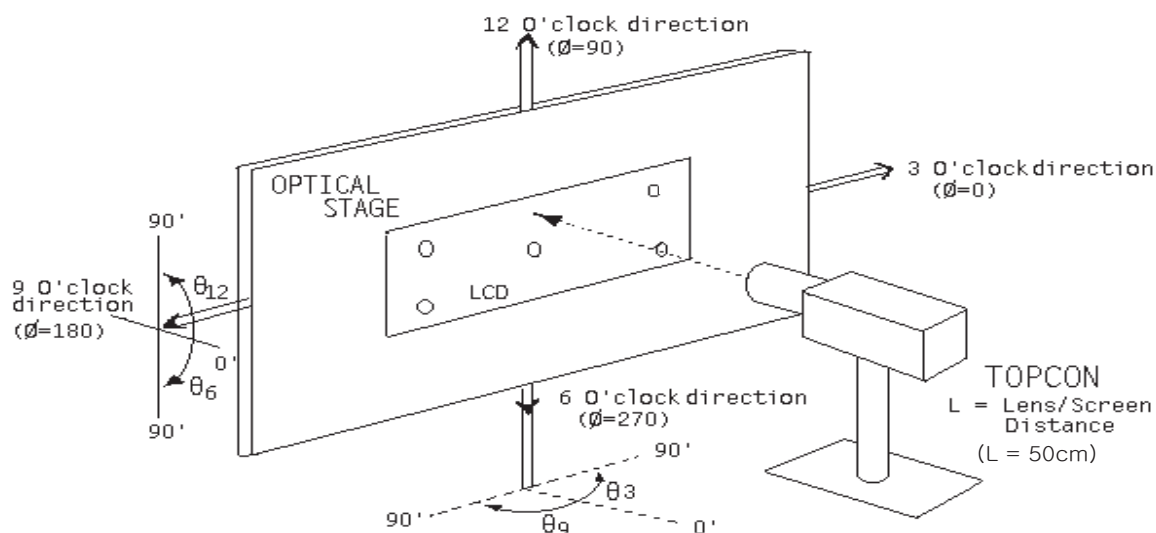
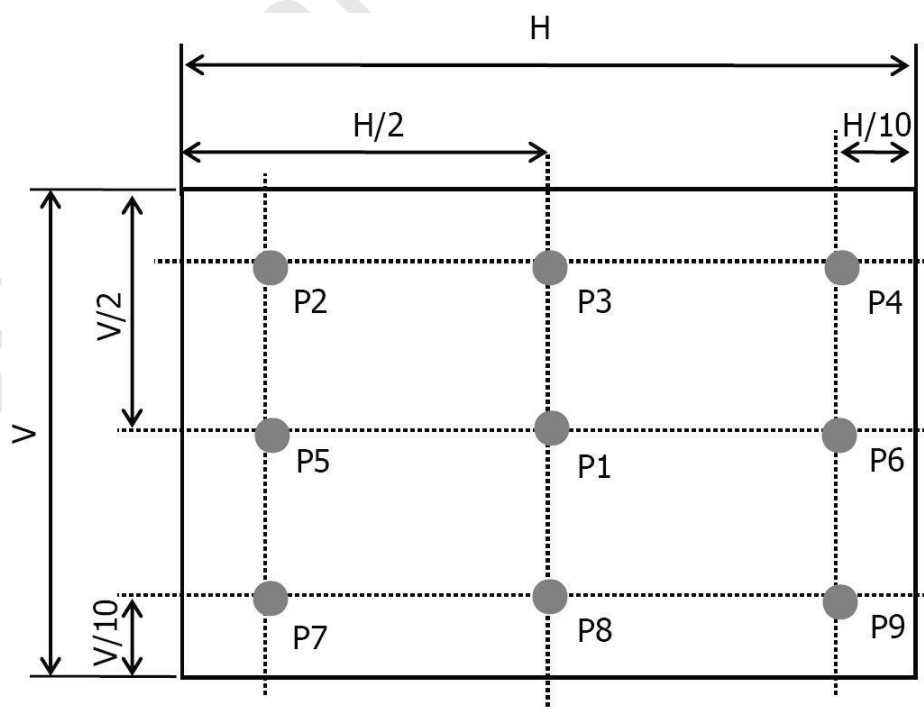
REV

ISSUE DATE

TFT- LCD PRODUCT

Rev.P0

2019.1.11

15.0 APPENDIX**Figure 1. Measurement Set Up****Figure 2. White Luminance and Uniformity Measurement Locations (9 points)**SPEC. NUMBER
S8-65-8A-263SPEC. TITLE
B4 PV190E0M-N10 Product Specification Rev.P0PAGE
26 OF 29

A4(210 X 297)



PRODUCT GROUP

REV

ISSUE DATE

TFT- LCD PRODUCT

Rev.P0

2019.1.11

Figure 3. Response Time Testing

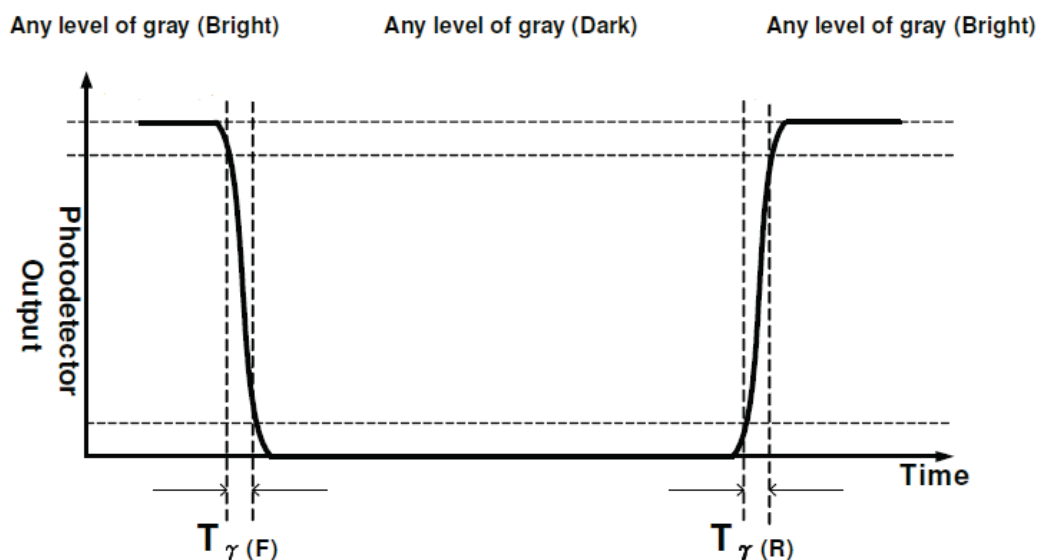
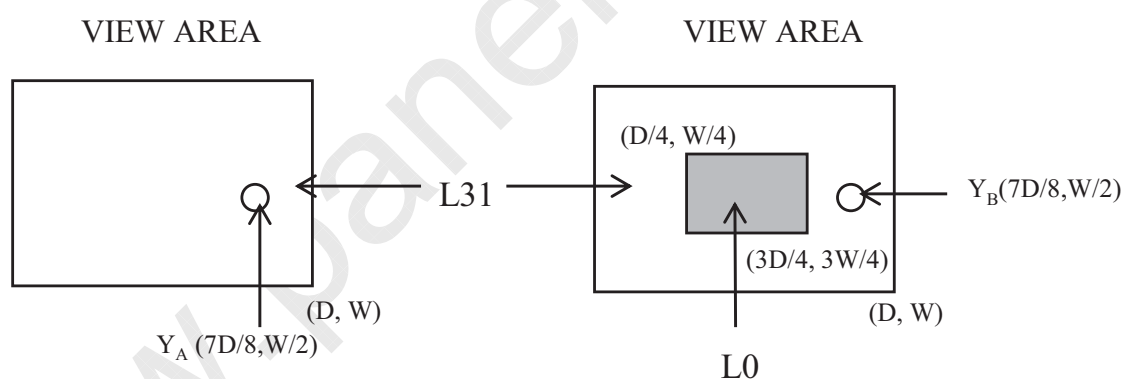


Figure 4. Cross Modulation Test Description



$$\text{Cross-Talk (\%)} = \left| \frac{Y_B - Y_A}{Y_A} \right| \times 100$$

Where: Y_A = Initial luminance of measured area (cd/m^2)

Y_B = Subsequent luminance of measured area (cd/m^2)

The location measured will be exactly the same in both patterns

SPEC. NUMBER

S8-65-8A-263

SPEC. TITLE

B4 PV190E0M-N10 Product Specification Rev.P0

PAGE

27 OF 29

A4(210 X 297)

2019.1.11

	10.48 ± 0.50
--	--------------

5. Unknown tolerance : $\pm 0.3\text{mm}$

PAGE
28 OF 29

BOE**PRODUCT GROUP**

REV

ISSUE DATE

TFT- LCD PRODUCT

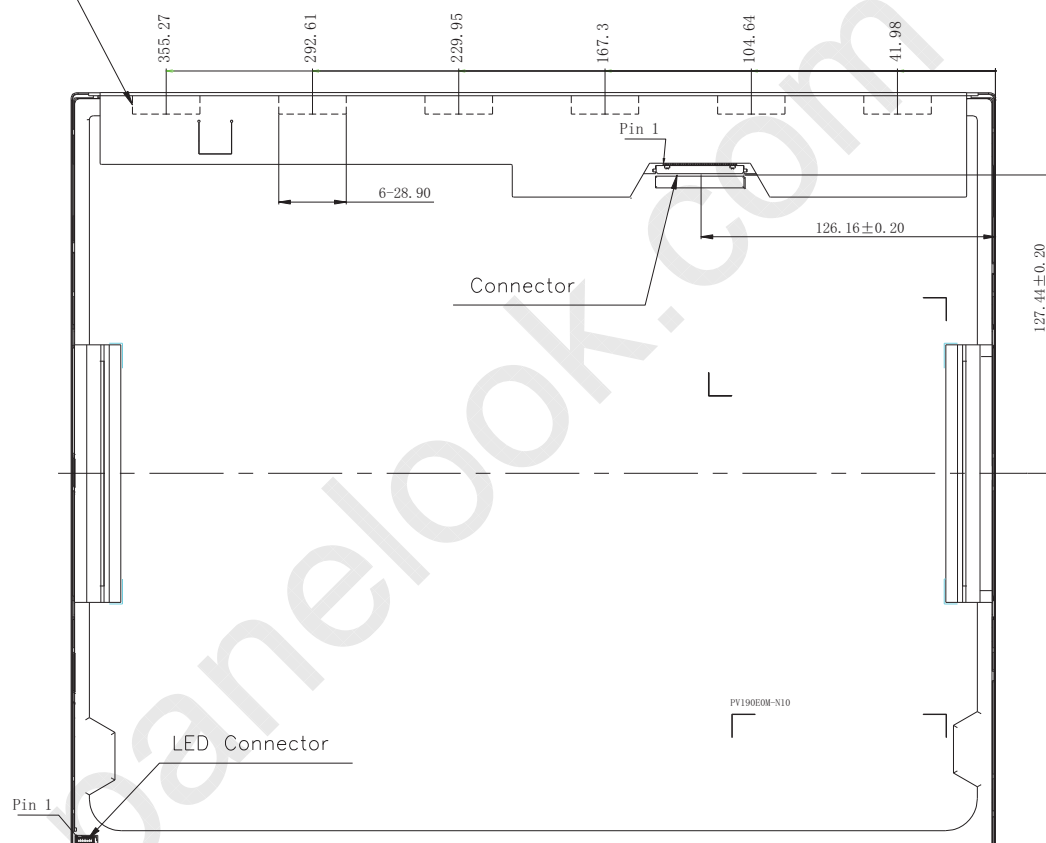
Rev.P0

2019.1.11

Figure 6. TFT-LCD Module Outline Dimensions (Rear view)

LCM Connector 30Pin Description		LED Connector 6Pin Description	
Pin No.	SYMBOL	Pin No.	SYMBOL
1	OON	1	K
2	OOP	2	K
3	O1N	3	A
4	O1P	4	A
5	O2N	5	K
6	O2P	6	K
7	GND		
8	OCKN		
9	OCKP		
10	O3N		
11	O3P		
12	EON		
13	EOP		
14	GND		
15	E1N		
16	E1P		
17	GND		
18	E2N		
19	E2P		
20	ECKN		
21	ECKP		
22	E3N		
23	E3P		
24	GND		
25	SCL_V		
26	SDA_V		
27	DUMMY		
28	VDD		
29	VDD		
30	VDD		

COF position
No press

**NOTE:**

1. CONFORMITY WITH ROHS & HALOGEN FREE;
2. OPERATING TEMP.: -10° C ~ +55° C; STORAGE TEMP.: -20° C ~ +60° C
3. Connector: IS100_L30R_C23 LED Connector: 3707K-S06N-00L3
4. UNSPECIFIED DIMENSIONS CAN USE CAD DATA
5. Unknown tolerance : $\pm 0.3\text{mm}$

SPEC. NUMBER
S8-65-8A-263

SPEC. TITLE
B4 PV190E0M-N10 Product Specification Rev.P0

PAGE
29 OF 29

A4(210 X 297)