

**BOE****PROPRIETARY NOTE**

THIS SPECIFICATION IS THE PROPERTY OF BOEFZ AND SHALL NOT BE REPRODUCED OR COPIED WITHOUT THE WRITTEN PERMISSION OF BOEFZ AND MUST BE RETURNED TO BOEFZ UPON ITS REQUEST

SPEC. NUMBER  
S8-64-8D-170PRODUCT GROUP  
TFT-LCD

Rev. 0

ISSUE DATE  
2022.03.21PAGE  
1 OF 32**TITLE :****QV185FHB-N82 Product Specification**

Fuzhou BOE Optoelectronics Technology Co.,Ltd



<b>BOE</b>		<b>PRODUCT GROUP</b>		REV	ISSUE DATE
		TFT- LCD PRODUCT		0	2022.03.21
SPEC. NUMBER S8-64-8D-170		SPEC. TITLE QV185FHB-N82 Product Specification			PAGE 2 OF 32
<b>REVISION HISTORY</b>					
REV.	ECN No.	DESCRIPTION OF CHANGES	DATE	PREPARED	
P0	-	Initial Release	2022.03.21	Qiming Li	
0		Update	2022.03.21	Qiming Li	

<b>BOE</b>	<b>PRODUCT GROUP</b>	REV	ISSUE DATE
	TFT- LCD PRODUCT	0	2022.03.21
SPEC. NUMBER S8-64-8D-170	SPEC. TITLE QV185FHB-N82 Product Specification		PAGE 3 OF 32

### Contents


No	ITEM	Page
	REVISIONS HISTORY	2
	CONTENTS	3
1	GENERAL DESCRIPTION	4
	1.1 Introduction	
	1.2 Features	
	1.3 Applications	
	1.4 General Specification	
2	ABSOLUTE MAXIMUM RATINGS	6
3	ELECTRICAL SPECIFICATIONS	7
	3.1 TFT LCD Open Cell	
4	INTERFACE CONNECTION	8
	4.1 Open Cell Input Signal & Power	
	4.2 LVDS Interface	
	4.3 LVDS Rx Interface Timing Parameter	
	4.4 LVDS Rx Interface Eye Diagram	
	4.5 LVDS Receiver Differential Input	
5	SIGNAL TIMING SPECIFICATIONS	14
	5.1 Timing Parameters (DE only mode)	
	5.2 Signal Timing Waveform	
	5.3 Input Signals, Basic Display Colors and Gray Scale of Colors	
	5.4 Power Sequence	
6	OPTICAL SPECIFICATIONS	18
7	MECHANICAL CHARACTERISTICS	20
8	RELIABILITY TEST	21
9	PRODCUT SERIAL NUMBER	22
10	PACKING INFORMATION	23
11	PRECAUTIONS	25
12	APPENDIX	26

<b>BOE</b>	<b>PRODUCT GROUP</b>	REV	ISSUE DATE
	TFT- LCD PRODUCT	0	2022.03.21
SPEC. NUMBER S8-64-8D-170	SPEC. TITLE QV185FHB-N82 Product Specification		PAGE 4 OF 32

## 1.0 GENERAL DESCRIPTION

### 1.1 Introduction

QV185FHB-N82 is a color active matrix TFT LCD Open Cell using amorphous silicon TFT's (Thin Film Transistors) as an active switching devices. This Open Cell has a 18.5 inch diagonally measured active area with FHD resolutions (1920 horizontal by 1080 vertical pixel array). Each pixel is divided into RED, GREEN, BLUE dots which are arranged in vertical stripe and this module can display 16.7M colors. The TFT-LCD Open Cell panel is adapted for a low reflection and higher color type.

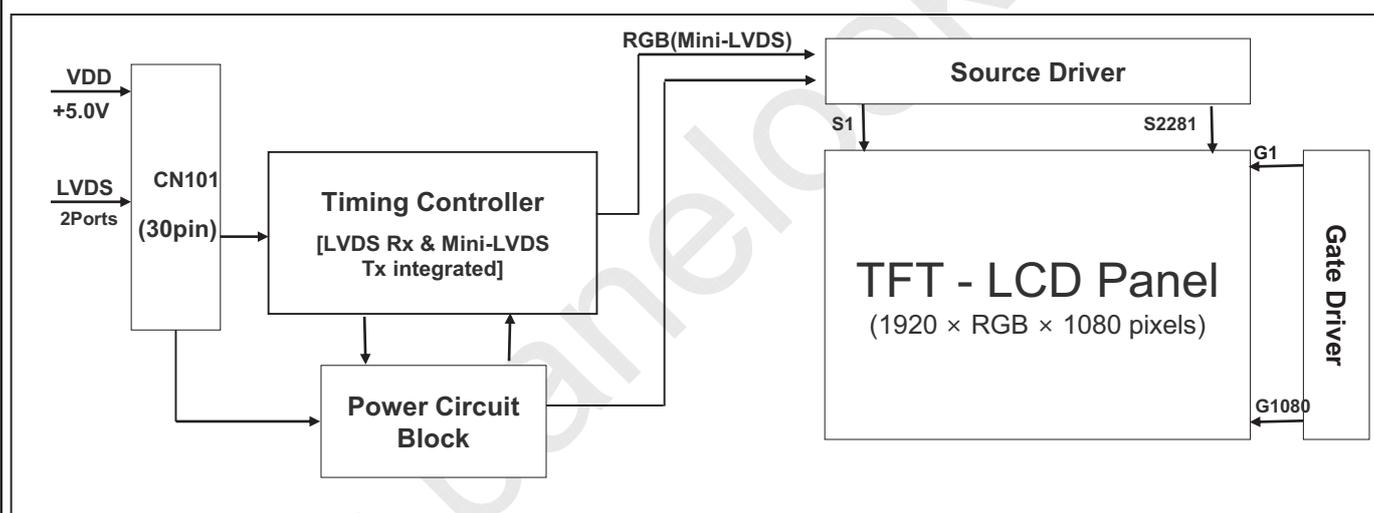

### 1.2 Features

- LVDS interface with 2 pixel / clock
- High-speed response
- Low color shift image quality
- 8-bit color depth, display 16.7M colors
- Wide viewing angle
- DE (Data Enable) only mode
- iHADS technology is applied for high display quality
- RoHS compliant

<b>BOE</b>	<b>PRODUCT GROUP</b>	REV	ISSUE DATE
	TFT- LCD PRODUCT	0	2022.03.21
SPEC. NUMBER S8-64-8D-170	SPEC. TITLE QV185FHB-N82 Product Specification		PAGE 5 OF 32

### 1.3 Application

- Commercial Digital Display
- Display Terminals for Control System
- Landscape Display

### 1.4 General Specification

< Table 1. General Specifications >

Parameter	Specification	Unit	Remarks
Active area	408.96(H) × 230.04(V)	mm	
Number of pixels	1920(H) × 1080(V)	pixels	
Pixel pitch	213(H) × 213(V)	um	
Pixel arrangement	Pixels RGB Vertical stripe		
Display colors	16.7M	colors	Real 8bits
Display mode	Normally Black		
Open Cell Transmittance	3.8%	%	At center point With BOE YR粉 BLU
Dimensional outline	422.2(H) × 244.1(V)	mm	Detail refer to drawing
Weight	330 (typ.)	g	
Power Consumption	17.15W typ. 23W max.	Watt	BLU Consumption 14.4W typ 17W max
Surface Treatment	Haze 25% , 3H		

<b>BOE</b>	<b>PRODUCT GROUP</b>	REV	ISSUE DATE
	TFT- LCD PRODUCT	0	2022.03.21
SPEC. NUMBER S8-64-8D-170	SPEC. TITLE QV185FHB-N82 Product Specification	PAGE 6 OF 32	


## 2.0 ABSOLUTE MAXIMUM RATINGS

The followings are maximum values which, if exceed, may cause faulty operation or damage to the unit. The operational and non-operational maximum voltage and current values are listed in Table 2.

< Table 2. Open Cell Electrical Specifications > [VSS=GND=0V]

Parameter	Symbol	Min.	Max.	Unit	Remark
Power Supply Voltage	VDD	VSS-0.3	6.5	V	Ta = 25 °C
Operating Temperature	T <sub>OP</sub>	0	+50	°C	
Storage Temperature	T <sub>SUR</sub>	-20	+60	°C	Note 1
	T <sub>ST</sub>	-20	+60	°C	
Operating Ambient Humidity	Hop	10	80	%RH	
Storage Humidity	Hst	10	80	%RH	

Note 1 : Temperature and relative humidity range are shown in the figure below.  
Wet bulb temperature should be 39 °C max. and no condensation of water.

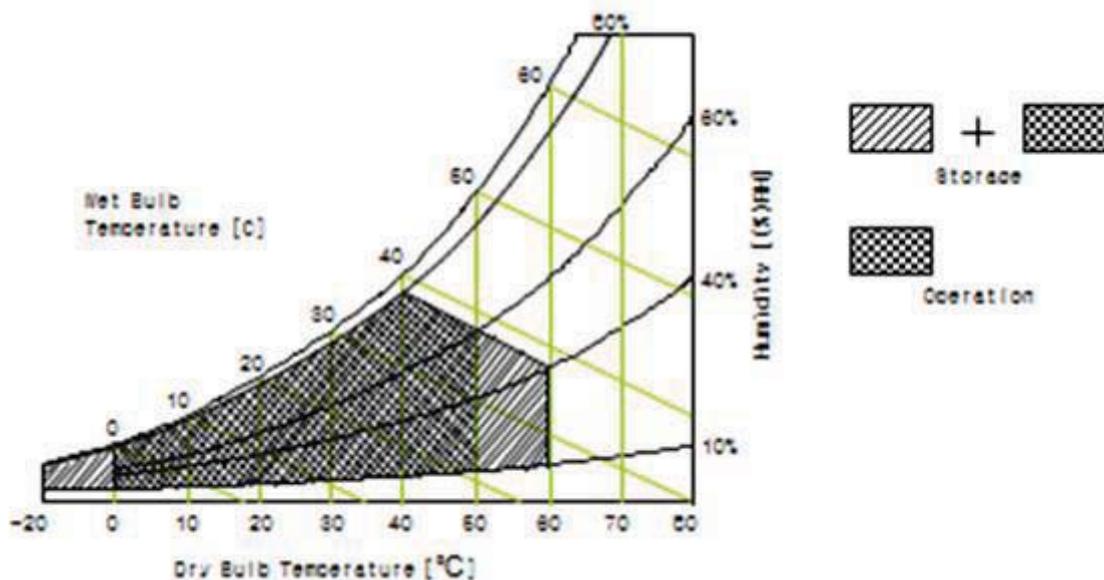

<b>BOE</b>	<b>PRODUCT GROUP</b>	REV	ISSUE DATE
	TFT- LCD PRODUCT	0	2022.03.21
SPEC. NUMBER S8-64-8D-170	SPEC. TITLE QV185FHB-N82 Product Specification		PAGE 7 OF 32

### 3.0 ELECTRICAL SPECIFICATIONS

#### 3.1 TFT LCD Open Cell

< Table 3. Open Cell Electrical Specifications >

[Ta =25±2 °C]

Parameter	Symbol	Values			Unit	Remark	
		Min	Typ	Max			
Power Supply Input Voltage	VDD	4.5	5.0	5.5	V		
Power Supply Ripple Voltage	VRP			200	mV		
Power Supply Current	IDD	-	550	1400	mA	Note 1	
Power Consumption	PDD	-	2.75	6.0	Watt		
Rush current	IRUSH	-	-	3.0	A	Note 2	
LVDS Interface	Differential Input High Threshold Voltage	VLVTH	-	-	+100	mV	
	Differential Input Low Threshold Voltage	VLVTL	-100	-	-	mV	
	Common Input Voltage	VLVC	1.0	1.2	1.4	V	
CMOS Interface	Input High Threshold Voltage	VIH	2.7	-	3.3	V	
	Input Low Threshold Voltage	VIL	0	-	0.6	V	

Note 1 : The supply voltage is measured and specified at the interface connector of LCM.

The current draw and power consumption specified is for VDD=5.0V,


Frame rate  $f_v=60\text{Hz}$  and Clock frequency = 74.25MHz.

Test Pattern of power supply current


a) Typ : Mosaic 7X5 (L0/L255)



b) Max Skip 1 dot Pattern (L255)

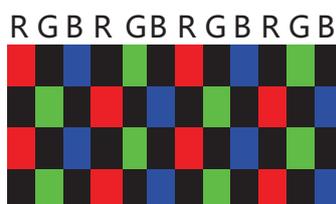

c) Flicker Pattern



Note 2 : The duration of rush current is about 2ms and rising time of Power Input is 1ms(min)


<b>BOE</b>	<b>PRODUCT GROUP</b>	REV	ISSUE DATE
	TFT- LCD PRODUCT	0	2022.03.21
SPEC. NUMBER S8-64-8D-170	SPEC. TITLE QV185FHB-N82 Product Specification		PAGE 8 OF 32

## 4.0 INTERFACE CONNECTION

### 4.1 Open Cell Input Signal & Power

- LVDS Connector : IS100-L30R-C23 (UJU) or Equivalent.

< Table 4. Open Cell Input Connector Pin Configuration >

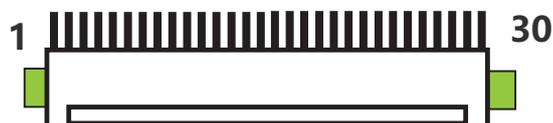

Pin No	Symbol	Description	Pin No	Symbol	Description
1	RXO0-	Negative Transmission data of Pixel 0 (ODD)	16	RXE1+	Positive Transmission data of Pixel 1 (EVEN)
2	RXO0+	Positive Transmission data of Pixel 0 (ODD)	17	GNG	Power Ground
3	RXO1-	Negative Transmission data of Pixel 1 (ODD)	18	RXE2-	Negative Transmission data of Pixel 2 (EVEN)
4	RXO1+	Positive Transmission data of Pixel 1 (ODD)	19	RXE2+	Positive Transmission data of Pixel 2 (EVEN)
5	RXO2-	Negative Transmission data of Pixel 2 (ODD)	20	RXEC-	Negative Transmission Clock (EVEN)
6	RXO2+	Positive Transmission data of Pixel 2 (ODD)	21	RXEC+	Positive Transmission Clock (EVEN)
7	GND	Power Ground	22	RXE3-	Negative Transmission data of Pixel 3 (EVEN)
8	RXOC-	Negative Transmission Clock (ODD)	23	RXE3+	Positive Transmission data of Pixel 3 (EVEN)
9	RXOC+	Positive Transmission Clock (ODD)	24	GND	Power Ground
10	RXO3-	Negative Transmission data of Pixel 3 (ODD)	25	NC	No. Connection
11	RXO3+	Positive Transmission data of Pixel 3 (ODD)	26	NC	No. Connection
12	RXE0-	Negative Transmission data of Pixel 0 (EVEN)	27	NC	No. Connection
13	RXE0+	Positive Transmission data of Pixel 0 (EVEN)	28	VDD	Power Supply: +5V
14	GND	Power Ground	29	VDD	
15	RXE1-	Negative Transmission data of Pixel 1 (EVEN)	30	VDD	

Note : 1.Pin 24 should be connected with GND.

2. NC(Not Connected) : This pins are only used for BOE internal operations.

3. Input Level of LVDS signal is based on the EIA-644 Standard.

4. Data format: VESA only.

<b>BOE</b>	<b>PRODUCT GROUP</b>	REV	ISSUE DATE
	TFT- LCD PRODUCT	0	2022.03.21
SPEC. NUMBER S8-64-8D-170	SPEC. TITLE QV185FHB-N82 Product Specification		PAGE 9 OF 32

#### 4.2 LVDS Interface

- LVDS Receiver : Timing Controller (LVDS Rx merged) / LVDS Data : Pixel Data

< Table 5. Open Cell Input Connector Pin Configuration >

Channel No.	Data No.	8-bit LVDS Type
		NS
0	Bit-0	R0
	Bit-1	R1
	Bit-2	R2
	Bit-3	R3
	Bit-4	R4
	Bit-5	R5
	Bit-6	G0
1	Bit-0	G1
	Bit-1	G2
	Bit-2	G3
	Bit-3	G4
	Bit-4	G5
	Bit-5	B0
	Bit-6	B1
2	Bit-0	B2
	Bit-1	B3
	Bit-2	B4
	Bit-3	B5
	Bit-4	HS
	Bit-5	VS
	Bit-6	DE
3	Bit-0	R6
	Bit-1	R7
	Bit-2	G6
	Bit-3	G7
	Bit-4	B6
	Bit-5	B7
	Bit-6	-


<b>BOE</b>	<b>PRODUCT GROUP</b>	REV	ISSUE DATE
	TFT- LCD PRODUCT	0	2022.03.21
SPEC. NUMBER S8-64-8D-170	SPEC. TITLE QV185FHB-N82 Product Specification		PAGE 10 OF 32

### 4.3 LVDS Rx Interface Timing Parameter

The specification of the LVDS Rx interface timing parameter is shown in Table 6.

<Table 6. LVDS Rx Interface Timing Specification>

Item	Symbol	Min	Typ	Max	Unit	Remark
CLKIN Period	tRCIP	12.83	13.47	16.66	nsec	
Input Data 0	tRIP1	-0.42	0.0	+0.42	nsec	
Input Data 1	tRIP0	tRCIP/7-0.42	tRCIP/7	tRCIP/7+0.42	nsec	
Input Data 2	tRIP6	2 × tRCIP/7-0.42	2 × tRCIP/7	2 × tRCIP/7+0.42	nsec	
Input Data 3	tRIP5	3 × tRCIP/7-0.42	3 × tRCIP/7	3 × tRCIP/7+0.42	nsec	
Input Data 4	tRIP4	4 × tRCIP/7-0.42	4 × tRCIP/7	4 × tRCIP/7+0.42	nsec	
Input Data 5	tRIP3	5 × tRCIP/7-0.42	5 × tRCIP/7	5 × tRCIP/7+0.42	nsec	
Input Data 6	tRIP2	6 × tRCIP/7-0.42	6 × tRCIP/7	6 × tRCIP/7+0.42	nsec	

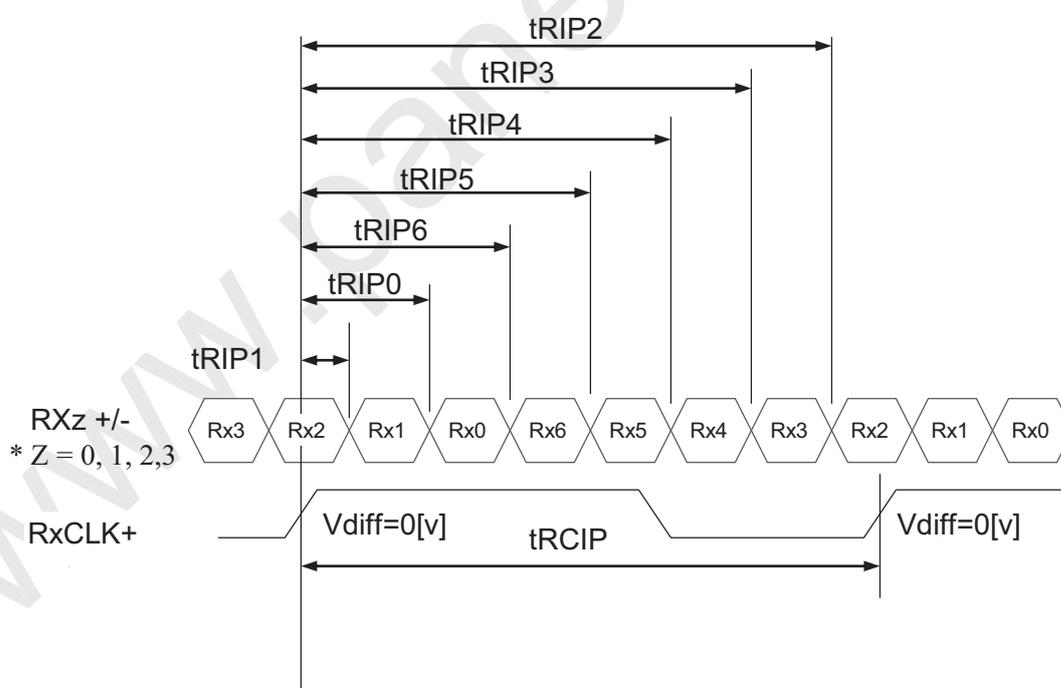


$$* V_{diff} = (RXz+) - (RXz-), \dots, (RXCLK+) - (RXCLK-)$$

<b>BOE</b>	<b>PRODUCT GROUP</b>	REV	ISSUE DATE
	TFT- LCD PRODUCT	0	2022.03.21
SPEC. NUMBER S8-64-8D-170	SPEC. TITLE QV185FHB-N82 Product Specification		PAGE 11 OF 32

#### 4.4 LVDS Rx Interface Eye Diagram

< Table 7. LVDS Rx Interface Eye Diagram >

Symbol	Min	Typ	Max	Unit	Note
A	-	150	-	mV	
B	-	150	-	mV	
C	-	0	-	mV	
D	-	-150	-	mV	
E	-	-150	-	mV	
F	-	0	-	mV	

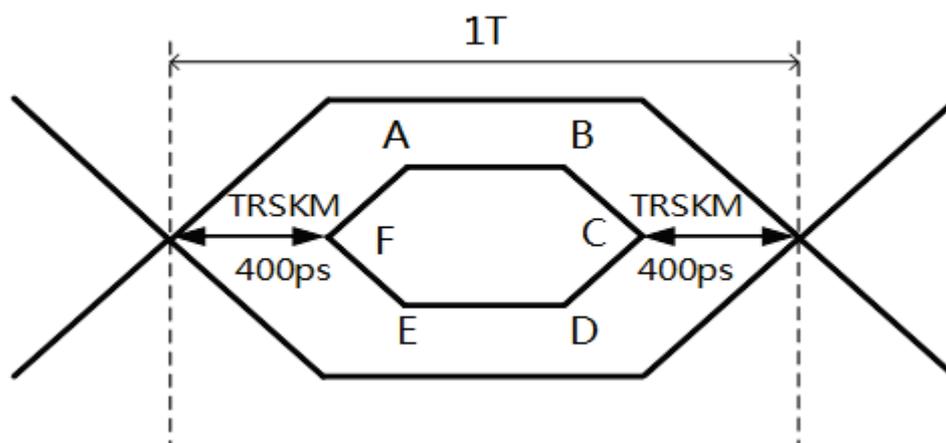

- Notes: 1. Time F to A,B to C,C to D,E to F is 150p second.  
 2. LVDS clock=85Mhz.  
 3. The time A to B=1T-2\*TRSKM-2\*150ps.


<b>BOE</b>	<b>PRODUCT GROUP</b>	REV	ISSUE DATE
	TFT- LCD PRODUCT	0	2022.03.21
SPEC. NUMBER S8-64-8D-170	SPEC. TITLE QV185FHB-N82 Product Specification		PAGE 12 OF 32

### 4.5 LVDS Receiver Differential Input


< Table 7-1. LVDS Receiver Differential Input >

Symbol	Parameter	Min	Typ	Max	Unit	Condition
$R_{xVTH}$	Differential input high threshold voltage	+0.1			V	$R_{xVCM} = 1.2V$
$R_{xVTL}$	Differential input low threshold voltage			-0.1	V	
$R_{xVIN}$	Input voltage range (singled-end)	0		2.4	V	
$R_{xVCM}$	Differential input common mode voltage	$ V_{ID} /2$		$2.4 -  V_{ID} /2$	V	
$ V_{ID} $	Differential input voltage	0.1		0.6	V	

#### Single-end Signals

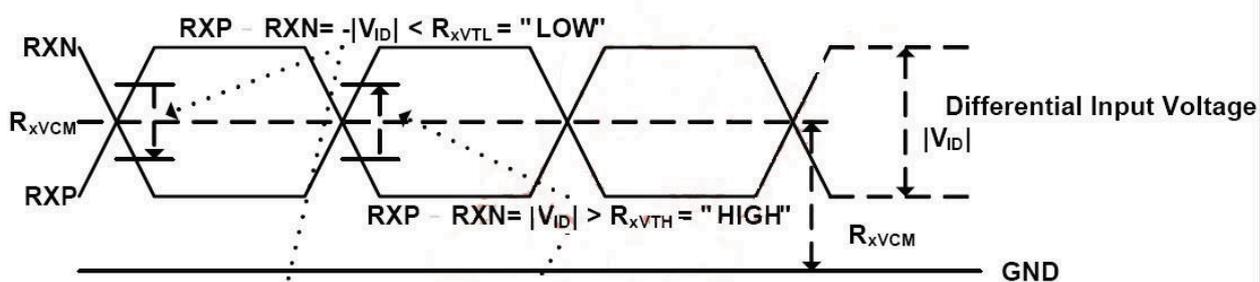

#### Differential Signal

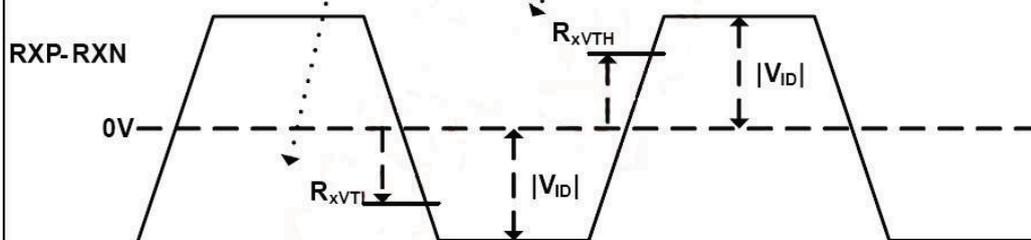

<b>BOE</b>	<b>PRODUCT GROUP</b>	REV	ISSUE DATE
	TFT- LCD PRODUCT	0	2022.03.21
SPEC. NUMBER S8-64-8D-170	SPEC. TITLE QV185FHB-N82 Product Specification		PAGE 13 OF 32

## 5.0 SIGNAL TIMING SPECIFICATION

### 5.1 Timing Parameters (DE only mode)

< Table 8. Timing Table >

Item		Symbols	Min	Typ	Max	Unit	
Clock	Frequency	1/Tc	60	74.25	78	MHz	
	High Time	Tch	-	4/7Tc	-		
	Low Time	Tcl	-	3/7Tc	-		
Frame Period		Tv	1100	1125	1149	lines	
			48.5	60	63	Hz	
Horizontal Active Display Term		Valid	t <sub>HV</sub>	-	960	-	t <sub>CLK</sub>
		Total	t <sub>HP</sub>	1060	1100	1200	t <sub>CLK</sub>
Vertical Active Display Term		Valid	t <sub>VV</sub>	-	1080	-	t <sub>HP</sub>
		Total	t <sub>VP</sub>	1100	1125	1149	t <sub>HP</sub>

Notes: This product is DE only mode. The input of Hsync & Vsync signal does not have an effect on normal operation.


< Table 9. LVDS Input SSCG >

Symbol	Parameter	Condition	Min	Typ	Max	Unit
F	LVDS Input frequency	-	60	74.25	78	MHz
T <sub>LVSK</sub>	LVDS channel to channel skew	F=100MHz V <sub>IC</sub> =1.2V V <sub>ID</sub> =±400mV	-380	-	+380	ps
F <sub>LVMOD</sub>	Modulating frequency of input clock during SSC		60	-	85	KHz
F <sub>LVDEV</sub>	Maximum deviation of input clock frequency during SSC		-3	-	+3	%
T <sub>CY-CY</sub>	Cycle to Cycle jitter		-	-	100	ps

<b>BOE</b>	<b>PRODUCT GROUP</b>	REV	ISSUE DATE
	TFT- LCD PRODUCT	0	2022.03.21
SPEC. NUMBER S8-64-8D-170	SPEC. TITLE QV185FHB-N82 Product Specification	PAGE 14 OF 32	


## 5.2 Signal Timing Waveform

### 5.2.1 Sync Timing Waveforms

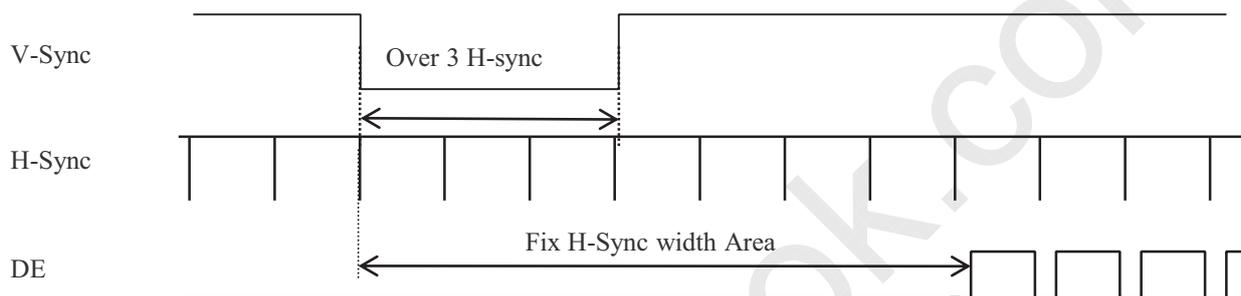



- 1) Need over 3 H-sync during V-Sync Low
- 2) Fix H-Sync width from V-Sync falling edge to first rising edge

### 5.2.2 Vertical Timing Waveforms

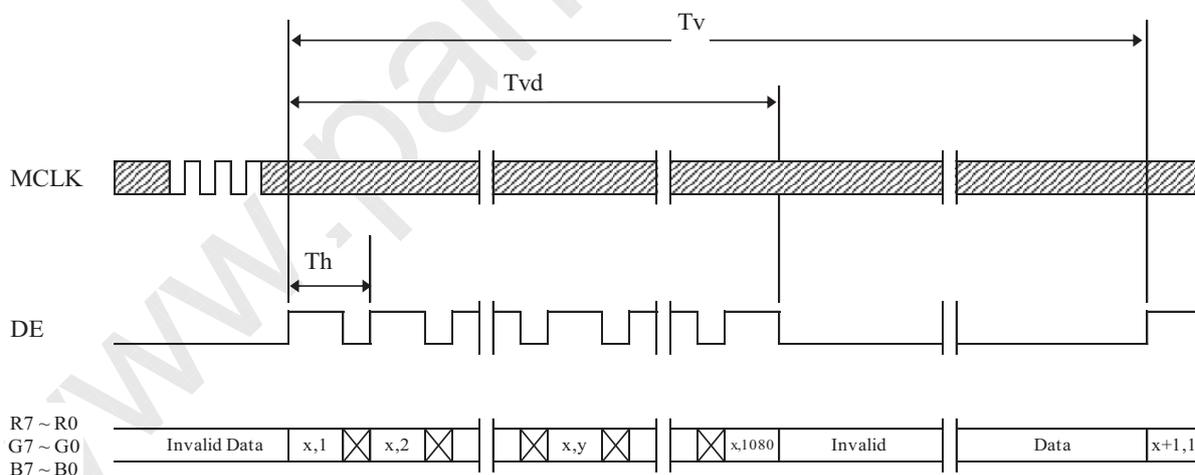

<b>BOE</b>	<b>PRODUCT GROUP</b>	REV	ISSUE DATE
	TFT- LCD PRODUCT	0	2022.03.21
SPEC. NUMBER S8-64-8D-170	SPEC. TITLE QV185FHB-N82 Product Specification		PAGE 15 OF 32

### 5.2.3 Horizontal Timing Waveforms

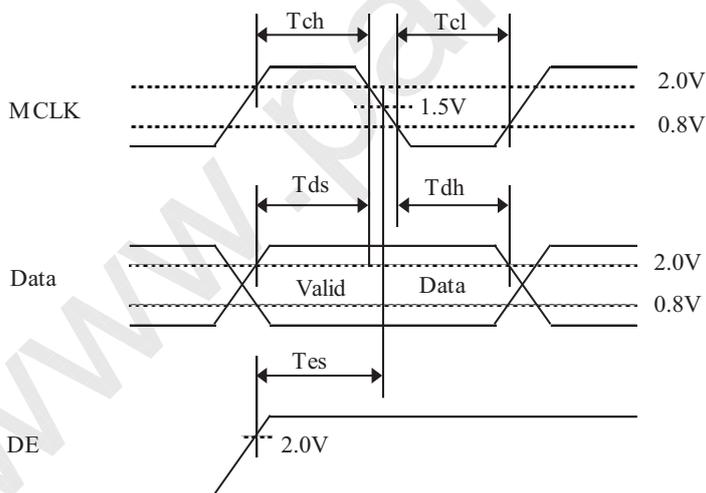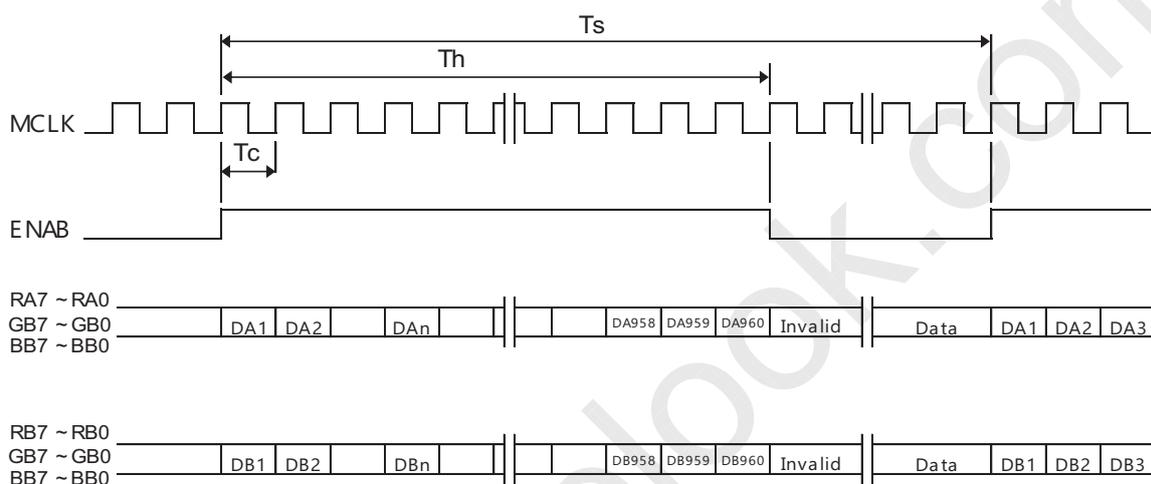

<b>BOE</b>	<b>PRODUCT GROUP</b>	REV	ISSUE DATE
	TFT- LCD PRODUCT	0	2022.03.21
SPEC. NUMBER S8-64-8D-170	SPEC. TITLE QV185FHB-N82 Product Specification	PAGE 16 OF 32	

### 5.3 Input Signals, Basic Display Colors and Gray Scale of Colors


< Table 10. Input Signal and Display Color Table >

Color & Gray Scale		Input Data Signal																							
		Red Data						Green Data						Blue Data											
		R7	R6	R5	R4	R3	R2	R1	R0	G7	G6	G5	G4	G3	G2	G1	G0	B7	B6	B5	B4	B3	B2	B1	B0
Basic Colors	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Blue	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1
	Green	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
	Cyan	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
	Red	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Magenta	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1
	Yellow	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
	White	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Gray Scale of Red	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
	△	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
	Darker	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
	△	↑						↑						↑											
	▽	↓						↓						↓											
	Brighter	1	1	1	1	1	1	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	▽	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Gray Scale of Green	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
	△	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	
	Darker	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	
	△	↑						↑						↑											
	▽	↓						↓						↓											
	Brighter	0	0	0	0	0	0	0	0	1	1	1	1	1	1	0	1	0	0	0	0	0	0	0	0
	▽	0	0	0	0	0	0	0	0	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0
	Green	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
Gray Scale of Blue	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
	△	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	
	Darker	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	
	△	↑						↑						↑											
	▽	↓						↓						↓											
	Brighter	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	0	1
	▽	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	0	
	Blue	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1
Gray Scale of White	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
	△	0	0	0	0	0	0	1	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	1	
	Darker	0	0	0	0	0	0	1	0	0	0	0	0	0	1	0	0	0	0	0	0	0	1	0	
	△	↑						↑						↑											
	▽	↓						↓						↓											
	Brighter	1	1	1	1	1	1	0	1	1	1	1	1	1	1	0	1	1	1	1	1	1	1	0	1
	▽	1	1	1	1	1	1	0	1	1	1	1	1	1	1	0	1	1	1	1	1	1	1	1	0
	White	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1

<b>BOE</b>	<b>PRODUCT GROUP</b>	REV	ISSUE DATE
	TFT- LCD PRODUCT	0	2022.03.21
SPEC. NUMBER S8-64-8D-170	SPEC. TITLE QV185FHB-N82 Product Specification		PAGE 17 OF 32

## 5.4 Power Sequence

To prevent a latch-up or DC operation of the Open Cell, the power on/off sequence shall be as shown in below

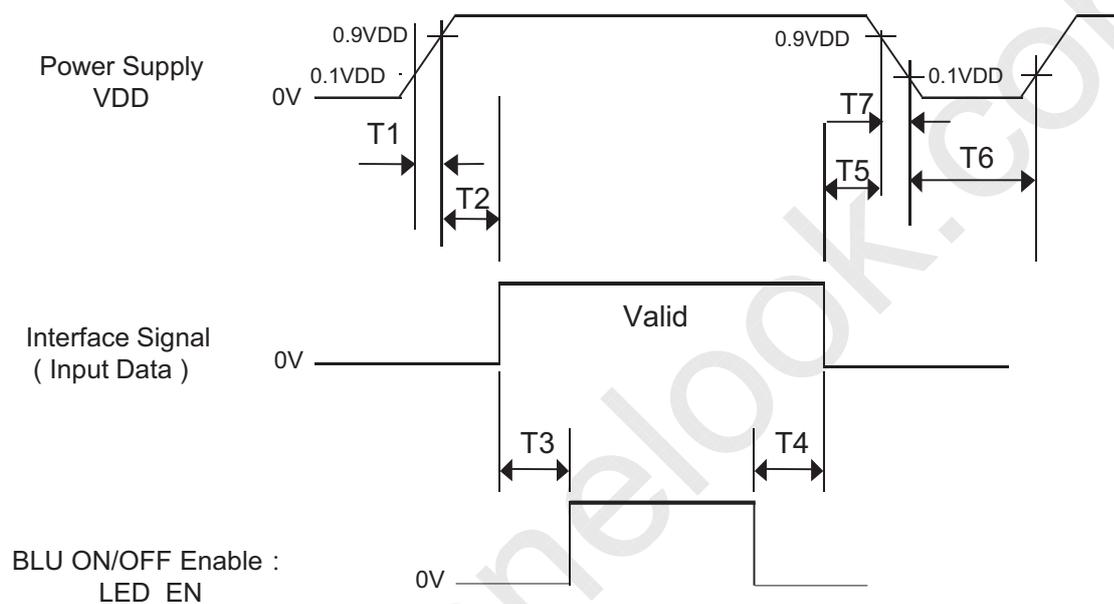

< Table 11. Sequence Table >

Parameter	Values			Units
	Min	Typ	Max	
T1	0.5	-	20	ms
T2	10	-	100	ms
T3	200	-	-	ms
T4	200	-	-	ms
T5	0	-	-	ms
T6	1	-	-	s

- Notes:
1. Back Light must be turn on after power for logic and interface signal are valid.
  2. Even though T1 is out of SPEC, it is still ok if the inrush current of VDD is below the limit.
  3. When  $VDD < 0.9VDD$  (Typ.), Power off.
  4. T7 decreases smoothly, if there were rebounding voltage, it must smaller than 5 volts.

<b>BOE</b>	<b>PRODUCT GROUP</b>	REV	ISSUE DATE
	TFT- LCD PRODUCT	0	2022.03.21
SPEC. NUMBER S8-64-8D-170	SPEC. TITLE QV185FHB-N82 Product Specification		PAGE 18 OF 32

## 6.0 OPTICAL SPECIFICATIONS

The test of optical specifications shall be measured in a dark room (ambient luminance $\leq$ 1 lux and temperature $=25\pm 2^{\circ}\text{C}$ ) with the equipment of Luminance meter system (Goniometer system and PR730) and test unit shall be located at an approximate distance 180cm from the LCD surface at a viewing angle of  $\theta$  and  $\Phi$  equal to  $0^{\circ}$ . We refer to  $\theta_{\Phi=0}$  ( $=\theta_3$ ) as the 3 o'clock direction (the "right"),  $\theta_{\Phi=90}$  ( $=\theta_{12}$ ) as the 12 o'clock direction ("upward"),  $\theta_{\Phi=180}$  ( $=\theta_9$ ) as the 9 o'clock direction ("left") and  $\theta_{\Phi=270}$  ( $=\theta_6$ ) as the 6 o'clock direction ("bottom"). While scanning  $\theta$  and/or  $\Phi$ , the center of the measuring spot on the Display surface shall stay fixed. The measurement shall be executed after 30 minutes warm-up period. VDD shall be 12.0V at  $25^{\circ}\text{C}$ . Optimum viewing angle direction is 6 'clock.

< Table 12. Optical Table >

[VDD = 12.0V, Frame rate = 60Hz, Ta =  $25\pm 2^{\circ}\text{C}$ ]

Parameter		Symbol	Condition	Min	Typ	Max	Unit	Remark
Viewing Angle	Horizontal	$\Theta_3$	CR > 10	80	89		Deg.	Note 1
		$\Theta_9$		80	89		Deg.	
	Vertical	$\Theta_{12}$		80	89		Deg.	
		$\Theta_6$		80	89		Deg.	
Contrast ratio		CR		800:1	1200:1	-		Note 2
Reproduction of color	White	$W_x$	$\Theta = 0^{\circ}$ (Center) Normal Viewing Angle	TYP. - 0.03	0.309	TYP. + 0.03		Note 3 With BOE YR粉 BLU
		$W_y$			0.310			
	Red	$R_x$			0.652			
		$R_y$			0.338			
	Green	$G_x$			0.314			
		$G_y$			0.606			
	Blue	$B_x$			0.149			
		$B_y$			0.059			
Color Gamut				67	72	-	%	
Response Time		GTG		-	14	-	ms	Note 4
Gamma Scale				2.0	2.2	2.4		
Cell Transmittance				3.4	3.8	-	%	

<b>BOE</b>	<b>PRODUCT GROUP</b>	REV	ISSUE DATE
	TFT- LCD PRODUCT	0	2022.03.21
SPEC. NUMBER S8-64-8D-170	SPEC. TITLE QV185FHB-N82 Product Specification		PAGE 19 OF 32

Note :

- Viewing angle is the angle at which the contrast ratio is greater than 10. The viewing are determined for the horizontal or 3, 9 o'clock direction and the vertical or 6, 12 o'clock direction with respect to the optical axis which is normal to the LCD surface.
- Contrast measurements shall be made at viewing angle of  $\theta = 0^\circ$  and at the center of the LCD surface. Luminance shall be measured with all pixels in the view field set first to white, then to the dark (black) state. Luminance Contrast Ratio (CR) is defined mathematically.

$$CR = \frac{\text{Luminance when displaying a white raster}}{\text{Luminance when displaying a black raster}}$$

- The color chromaticity coordinates specified in Table 12. shall be calculated from the spectral data measured with all pixels first in red, green, blue and white. Measurements shall be made at the center of the panel. The BLU is used by BOE.
- Response time  $T_r$  shall be measured by switching the signal from " 0 level of gray" to "255 level of gray". And response time  $T_f$  shall be measured by switching the signal from " 255 level of gray" to "0 level of gray".

Measured Response Time	Target																
	0	15	31	47	63	79	95	111	127	143	159	175	191	207	223	239	255
0																	
15																	
31																	
47																	
63																	
79																	
95																	
111																	
127																	
143																	
159																	
175																	
191																	
207																	
223																	
239																	
255																	

- Definition of Transmittance (T%) :

Module is with white(L255) signal input

$$\text{Transmittance} = \frac{\text{Luminance of LCD Module}}{\text{Luminance of BLU}} \times 100 \%$$

<b>BOE</b>	<b>PRODUCT GROUP</b>	REV	ISSUE DATE
	TFT- LCD PRODUCT	0	2022.03.21
SPEC. NUMBER S8-64-8D-170	SPEC. TITLE QV185FHB-N82 Product Specification		PAGE 20 OF 32

## 7.0 MECHANICAL CHARACTERISTICS

### 7.1 Dimensional Requirements

Figure 3(located in Appendix) shows mechanical outlines for the model QV185FHB-N81. Other parameters are shown in Table 13.

< Table 13. Dimensional Parameters >

Parameter	Specification	Unit
Dimensional outline	422.2(H) × 244.1(V)	mm
Weight	330(typ.)	gram
Active area	408.96 (H) × 230.04(V)	mm
Pixel pitch	213(H) × 213(V)	um
Number of pixels	1920(H)×1080(V) (1 pixel = R + G + B dots)	pixels

### 7.2 Mounting

See FIGURE 3.(shown in Appendix)

### 7.3 Anti-Glare and Polarizer Hardness.

The surface of the LCD has an anti-glare coating to minimize reflection and a coating to reduce scratching.

<b>BOE</b>	<b>PRODUCT GROUP</b>	REV	ISSUE DATE
	TFT- LCD PRODUCT	0	2022.03.21
SPEC. NUMBER S8-64-8D-170	SPEC. TITLE QV185FHB-N82 Product Specification		PAGE 21 OF 32

## 8.0 RELIABILITY TEST

The Reliability test items and its conditions are shown in below.


< Table 14. Reliability Test Parameters >

No	Test Items	Conditions
1	High temperature storage test	Ta = 70 °C, 240 hrs
2	Low temperature storage test	Ta = -20 °C, 240 hrs
3	High temperature & high humidity operation test	Ta = 50 °C, 80%RH, 240hrs
4	High temperature operation test	Ta = 70 °C, 240hrs
5	Low temperature operation test	Ta = -20 °C, 240hrs
6	Thermal shock	Ta = -20 °C ↔ 60 °C (per 0.5 hr), 100 cycle

This test condition is based on BOE module.

<b>BOE</b>	<b>PRODUCT GROUP</b>	REV	ISSUE DATE
	TFT- LCD PRODUCT	0	2022.03.21
SPEC. NUMBER S8-64-8D-170	SPEC. TITLE QV185FHB-N82 Product Specification		PAGE 22 OF 32

**9.0 PRODCUT SERIAL NUMBER**  
(标签规格: 40\*9mm, OC 专用)

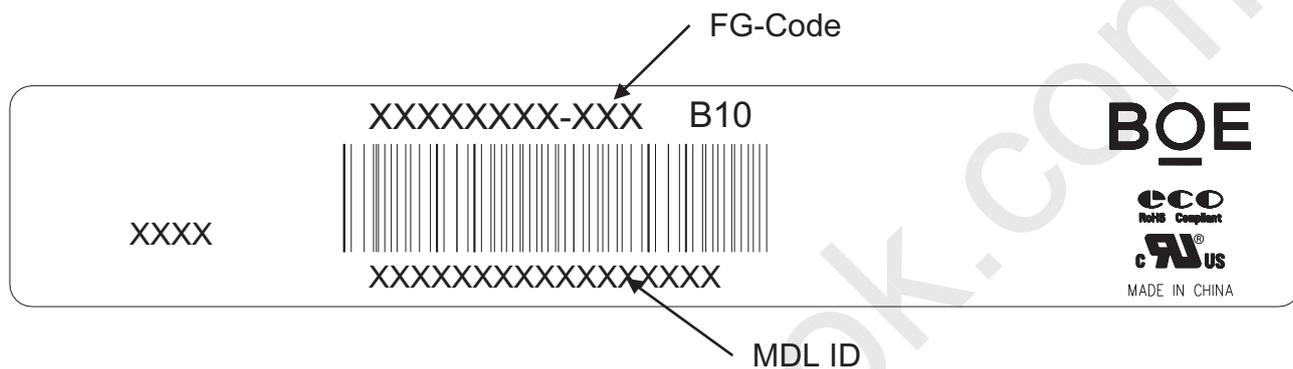

MDL ID Naming Rule:


Digit Code	1	2	3	4	5	6	7	8	9	10	11
Description	Model Code GBN		Grade	Line	Year		Month	Model Extension Code			
Digit Code	12	13	14	15	16	17	18				
Description	Serial No						扫码不显示, BOE厂内用				

<b>BOE</b>	<b>PRODUCT GROUP</b>	REV	ISSUE DATE
	TFT- LCD PRODUCT	0	2022.03.21
SPEC. NUMBER S8-64-8D-170	SPEC. TITLE QV185FHB-N82 Product Specification		PAGE 23 OF 32


## 10.0 PACKING INFORMATION

BOE provides the standard shipping container for customers, unless customer specifies their packing information. The standard packing method and Barcode information are shown in below.

### 10.1 Packing Order

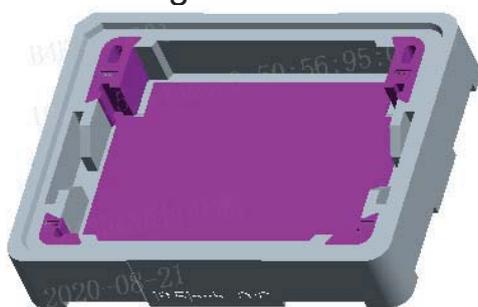



1pcs 2t EPE pad in one groove of box

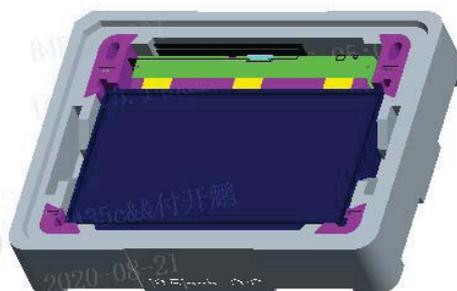

Put 1pcs Panel on the EPE Pad . Put one 2t EPE pad ... , totally 16 pcs Panel 、 16 pcs 2t EPE pads in one groove of box.



Put 36ea boxes per pallet ,9ea boxes per row ,  
4ea EPO cover on the top of the box,.  
Put 1ea top cover and 4ea corner on Box.  
Pack with 4 packing belts.

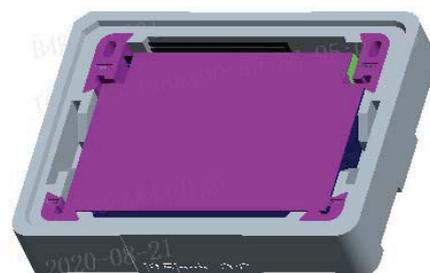

Then put 1pcs 2t pad on the panel,

<b>BOE</b>	<b>PRODUCT GROUP</b>	REV	ISSUE DATE
	TFT- LCD PRODUCT	0	2022.03.21
SPEC. NUMBER S8-64-8D-170	SPEC. TITLE QV185FHB-N82 Product Specification		PAGE 24 OF 32

### 10.2 Packing Note

- Box Dimension :555mm(L)×425mm(W)×112mm(H)
- Package Quantity in one Box : 16pcs

### 10.3 Box Label

- Label Size : 70mm (L) × 30 mm (W)
  - Contents
    - Model : QV185FHB-N81
    - Q`ty : OC 16 Q`ty in one box
    - Serial No. : Box Serial No.
    - Date : Packing Date

**BOE** FUZHOU BOE OPTOELECTRONICS TECHNOLOGY Co.,LTD

MODEL: XXXXXXXXX-XXX Q'TY: XXX

SERIAL NO: XXXXXXXXXXXXXXXX DATE: XXXX.XX.XX

XXXXXXXXXXXXXXXXXXXX XXXX

RoHS Mark

Internal CODE

Digit	1	2	3	4	5	6	7
Code	x	x	x	x	x	x	x
Des.	1. Model Code GBN 2. Grade 3. Line 4. Year(2016:16, 2017:17, ...) 5. Month(1, 2, 3, ..., 9, X, Y, Z) 6. Revision Code 7. Serial Number						

<b>BOE</b>	<b>PRODUCT GROUP</b>	REV	ISSUE DATE
	TFT- LCD PRODUCT	0	2022.03.21
SPEC. NUMBER S8-64-8D-170	SPEC. TITLE QV185FHB-N82 Product Specification		PAGE 25 OF 32

## 11.0 PRECAUTIONS

Please pay attention to the followings when you use this TFT LCD Panel.

### 11.1 Mounting Precautions

- Use finger-stalls with soft gloves in order to keep display clean during the incoming inspection and assembly process.
- You must mount a Panel using specified mounting holes (Details refer to the drawings)
- You should consider the mounting structure so that uneven force (ex. Twisted stress, Concentrated stress) is not applied to the Panel. And the case on which a Panel is mounted should have sufficient strength so that external force is not transmitted directly to the Panel.
- Do not apply mechanical stress or static pressure on Panel; Abnormal display cause by pressing some parts of Panel during assembly process, do not belong to product failure, the press should be agreed by two sides.
- Determine the optimum mounting angle, refer to the viewing angle range in the specification for each model.
- Do not apply mechanical stress or static pressure on Panel, and avoid impact, vibration and falling.
- Acetic acid type and chlorine type materials for the cover case are not desirable because the former generates corrosive gas of attacking the polarizer at high temperature and the latter causes circuit break by electro-chemical reaction.
- Protection film for polarizer on the Panel should be slowly peeled off before display.
- Be careful to prevent water & chemicals contact the Panel surface.
- You should adopt radiation structure to satisfy the temperature specification.
- Do not touch, push or rub the exposed polarizers with glass, tweezers or anything harder than HB pencil lead. And please do not rub with dust clothes with chemical treatment. Do not touch the surface of polarizer for bare hand or greasy cloth. (Some cosmetics are detrimental to the polarizer.)
- When the surface becomes dusty, please wipe gently with absorbent cotton or other soft materials like chamois soaks with petroleum benzine. Normal-hexane & alcohol is recommended for cleaning the adhesives used to attach front / rear polarizers. Do not use acetone, toluene, because they cause chemical damage to the polarizer.
- Wipe off saliva or water drops as soon as possible. Their long time contact with polarizer causes deformations and color fading..

<b>BOE</b>	<b>PRODUCT GROUP</b>	REV	ISSUE DATE
	TFT- LCD PRODUCT	0	2022.03.21
SPEC. NUMBER S8-64-8D-170	SPEC. TITLE QV185FHB-N82 Product Specification	PAGE 26 OF 32	
<ul style="list-style-type: none"> <li>• This Panel has its circuitry PCB's on the rear side and Driver IC, should be handled carefully in order not to be stressed.</li> <li>• Avoid impose stress on PCB and Driver IC during assembly process ,Do not drawing, bending, COF package &amp; wire</li> <li>• Do not disassemble the Panel.</li> </ul> <h3>11.2 Operating Precautions</h3> <ul style="list-style-type: none"> <li>• Do not connector or disconnect the cable to/from the Panel at the "Power On" Condition.</li> <li>• When the Panel is operating, do not lose CLK, ENAB signals. If any one of these signals is lost, the Panel would be damaged.</li> <li>• Obey the supply voltage sequence. If wrong sequence is applied, the Panel would be damaged.</li> <li>• Do not allow to adjust the adjustable resistance or switch</li> <li>• The electrochemical reaction caused by DC voltage will lead to LCD Panel degradation, so DC drive should be avoided.</li> <li>• The LCD Panels use C-MOS LSI drivers, so customers are recommended that any unused input terminal would be connected to Vdd or Vss, do not input any signals before power is turn on, and ground you body, work/assembly area, assembly equipment to protect against static electricity.</li> <li>• Do not exceed the absolute maximum rating value. (supply voltage variation, input voltage variation, variation in part contents and environmental temperature, and so on) Otherwise the Panel may be damaged.</li> <li>• Panel has high frequency circuits. Sufficient suppression to the electromagnetic interference shall be done by system manufacturers. Grounding and shielding methods may be important to minimized the interference.</li> <li>• Design the length of cable to connect between the connector for back-light and the converter as shorter as possible and the shorter cable shall be connected directly , The long cable between back-light and Converter may cause the Luminance of LED to lower and need a higher startup voltage</li> <li>• The cables should be as short as possible between System Board and PCB interface.</li> <li>• Connectors are precision devices to transmit electrical signals, and operators should plug in parallel</li> <li>• Be careful for condensation at sudden temperature change. Condensation makes damage to polarizer or electrical contacted parts. And after fading condensation, smear or spot will occur.</li> </ul>			

DAS-RD-2019029-O

A4(210 X 297)

<b>BOE</b>	<b>PRODUCT GROUP</b>	REV	ISSUE DATE
	TFT- LCD PRODUCT	0	2022.03.21
SPEC. NUMBER S8-64-8D-170	SPEC. TITLE QV185FHB-N82 Product Specification		PAGE 27 OF 32

### 11.3 Electrostatic Discharge Precautions

- Avoid the use work clothing made of synthetic fibers. We recommend cotton clothing or other conductivity-treated fibers.
- Since a Panel is composed of electronic circuits, it is not strong to electrostatic discharge. Make certain that treatment persons are connected to ground through wrist band etc.
- Do not close to static electricity to avoid product damage.
- Do not touch interface pin directly.

### 11.4 Precautions for Strong Light Exposure

- Do not leave the Panel operation or storage in Strong light . Strong light exposure causes degradation of polarizer and color filter.

### 11.5 Precautions for Storage

#### A. Atmosphere Requirement

ITEM	UNIT	MIN	MAX
Storage Temperature	(°C)	5	40
Storage Humidity	(%rH)	40	75
Storage Life	6 months		
Storage Condition	<ul style="list-style-type: none"> <li>• The storage room should be equipped with a dark and good ventilation facility.</li> <li>• Prevent products from being exposed to the direct sunlight, moisture and water.</li> <li>• The product need to keep away from organic solvent and corrosive gas.</li> <li>• Be careful for condensation at sudden temperature change.</li> <li>• Storage condition is guaranteed under packing conditions.</li> </ul>		

#### B. Package Requirement

- The product should be placed in a sealed polythene bag.
- Product Should be placed on the pallet, Which is away from the floor, Be cautions not to pile the product up.
- The polarizer surface should not come in contact with any other object. It is recommended that they be stored in the container in which they were shipped.
- As the original protective film, do not use the adhesive protective film to avoid change of Pol color and characteristic.

<b>BOE</b>	<b>PRODUCT GROUP</b>	REV	ISSUE DATE
	TFT- LCD PRODUCT	0	2022.03.21
SPEC. NUMBER S8-64-8D-170	SPEC. TITLE QV185FHB-N82 Product Specification		PAGE 28 OF 32

## 11.6 Precautions for protection film

- Remove the protective film slowly, keeping the removing direction approximate 30-degree not vertical from panel surface, If possible, under ESD control device like ion blower, and the humidity of working room should be kept over 50%RH to reduce the risk of static charge.
- People who peeled off the protection film should wear anti-static strap and grounded well.

## 11.7 Appropriate Condition for Commercial Display

-Generally large-sized LCD Panels are designed for consumer applications . Accordingly, long-term display like in Commercial Display application, can cause uneven display including image sticking. To optimize Panel's lifetime and function, several operating usages are required.

### 1. Normal operating condition

- Temperature:  $20 \pm 15^{\circ}\text{C}$
- Operating Ambient Humidity :  $55 \pm 20\%$
- Display pattern: dynamic pattern (Real display)
- Well-ventilated place is recommended to set up Commercial Display system

### 2. Special operating condition

#### a. Ambient condition

- Well-ventilated place is recommended to set up Commercial Display system.

#### b. Power and screen save

- Periodical power-off or screen save is needed after long-term display.

c. As the low temperature, the response time is greatly delayed. As the high temperatures (higher than the operating temperature) the LCD Panel may turn black screen. The above phenomenon cannot explain the failure of the display. When the temperature returns to the normal operating temperature, the LCD Panel will return to normal display.

d. When expose to drastic fluctuation of temperature (hot to cold or cold to hot ) ,the LCD Panel may be affected; Specifically, drastic temperature fluctuation from cold to hot ,produces dew on the LCD Panel 's surface which may affect the operation of the polarizer and LCD Panel

e. Do not exceed the absolute maximum rating value. (supply voltage variation, input voltage variation, variation in part contents and environmental temperature, and so on) Otherwise the Panel may be damaged.

<b>BOE</b>	<b>PRODUCT GROUP</b>	<b>REV</b>	<b>ISSUE DATE</b>
	TFT- LCD PRODUCT	0	2022.03.21
<b>SPEC. NUMBER</b> S8-64-8D-170	<b>SPEC. TITLE</b> QV185FHB-N82 Product Specification		<b>PAGE</b> 29 OF 32

f. Product reliability and functions are only guaranteed when the product is used under right operation usages. If product will be used in extreme conditions such as high temperature, high humidity, high altitude, special display images, running time, long time operation, outdoor operation, etc. It is strongly recommended to contact BOE for filed application engineering advice. Otherwise, its reliability and function may not be guaranteed. Extreme conditions are commonly found at airports, transit stations, banks, stock market and controlling systems.

3. Operating usages to protect against image sticking due to long-term static display.

a. Suitable operating time: under 20 hours a day.

b. Static information display recommended to use with moving image.

- Cycling display between 5 minutes' information(static) display and 10 seconds' moving image.

c. Background and character (image) color change

- Use different colors for background and character, respectively.

- Change colors themselves periodically.

d. Avoid combination of background and character with large different luminance.

1) Abnormal condition just means conditions except normal condition.

2) Black image or moving image is strongly recommended as a screen save

4. Lifetime in this spec. is guaranteed only when Commercial Display is used according to operating usages.

## 11.8 Other Precautions

### A. LC Leak

- If the liquid crystal material leaks from the panel, it is recommended to wash the LC with acetone or ethanol and then burn it.
- If the liquid crystal material leaks from the panel, it should be kept away from the eyes or mouth. In case of contact with hands, skin or clothes, it has to be washed away thoroughly with soap.
- If LC in mouth, mouth need to be washed, drink plenty of water to induce vomiting and follow medical advice.
- If LC touch eyes, eyes need to be washed with running water at least 15 minutes.


### B. Rework

- When returning the Panel for repair or etc., Please pack the Panel not to be broken. We recommend to use the original shipping packages.


<b>BOE</b>	<b>PRODUCT GROUP</b>	REV	ISSUE DATE
	TFT- LCD PRODUCT	0	2022.03.21
SPEC. NUMBER S8-64-8D-170	SPEC. TITLE QV185FHB-N82 Product Specification	PAGE 30 OF 32	

**12.0 APPENDIX**

< Figure 1. Measurement Set Up >

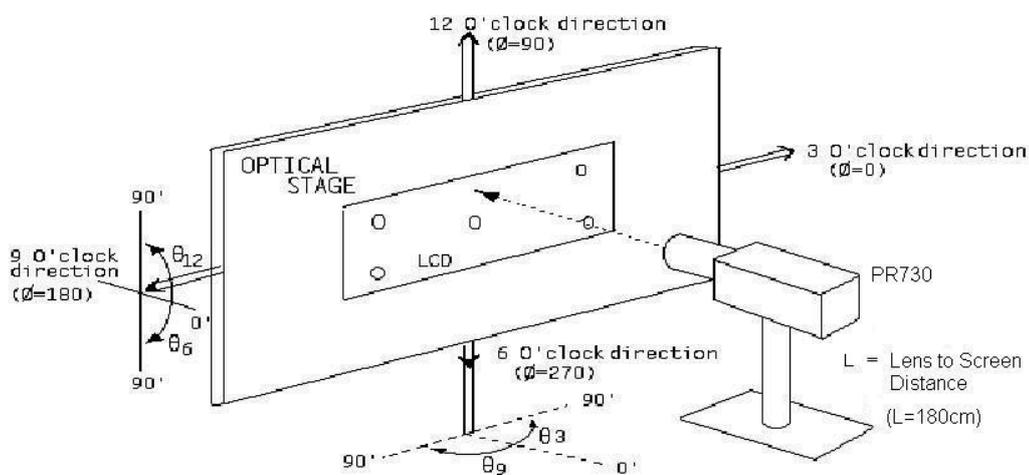


< Figure 2. Response Time Testing >

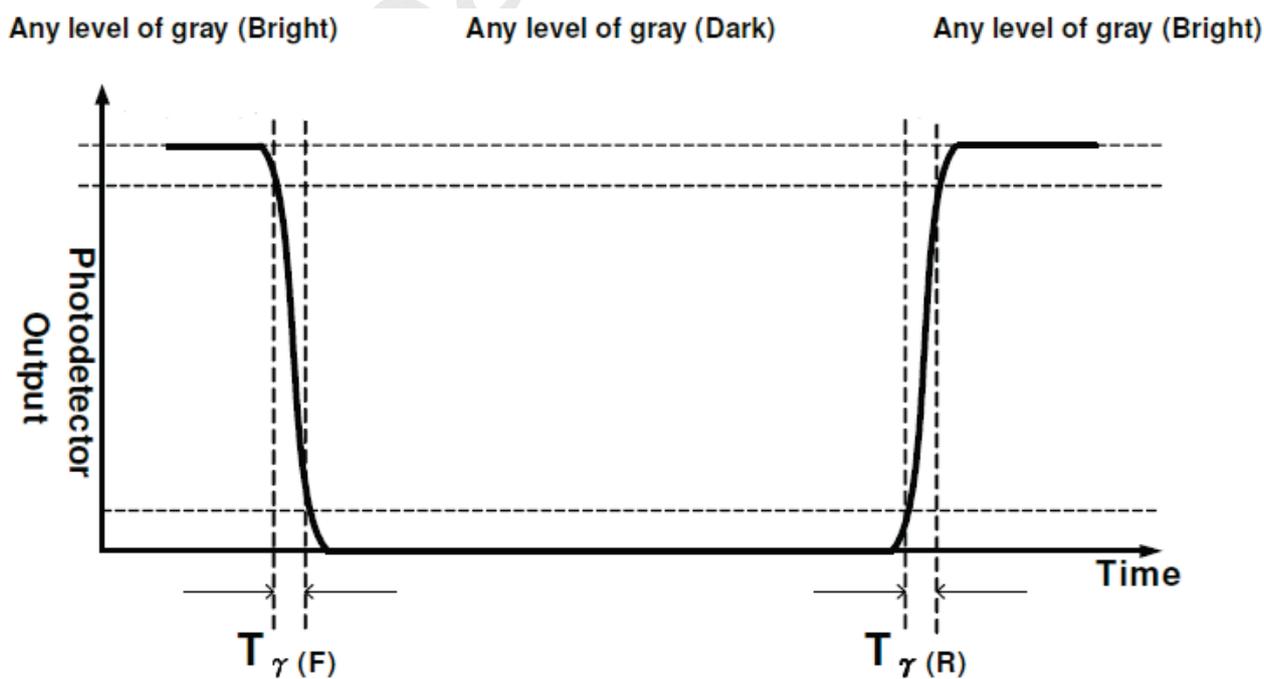

<b>BOE</b>	<b>PRODUCT GROUP</b>	REV	ISSUE DATE
	TFT- LCD PRODUCT	0	2022.03.21
SPEC. NUMBER S8-64-8D-170	SPEC. TITLE QV185FHB-N82 Product Specification	PAGE 31 OF 32	

&lt; Figure 3.TFT-LCD Open Cell Outline Dimensions (Front View) &gt;

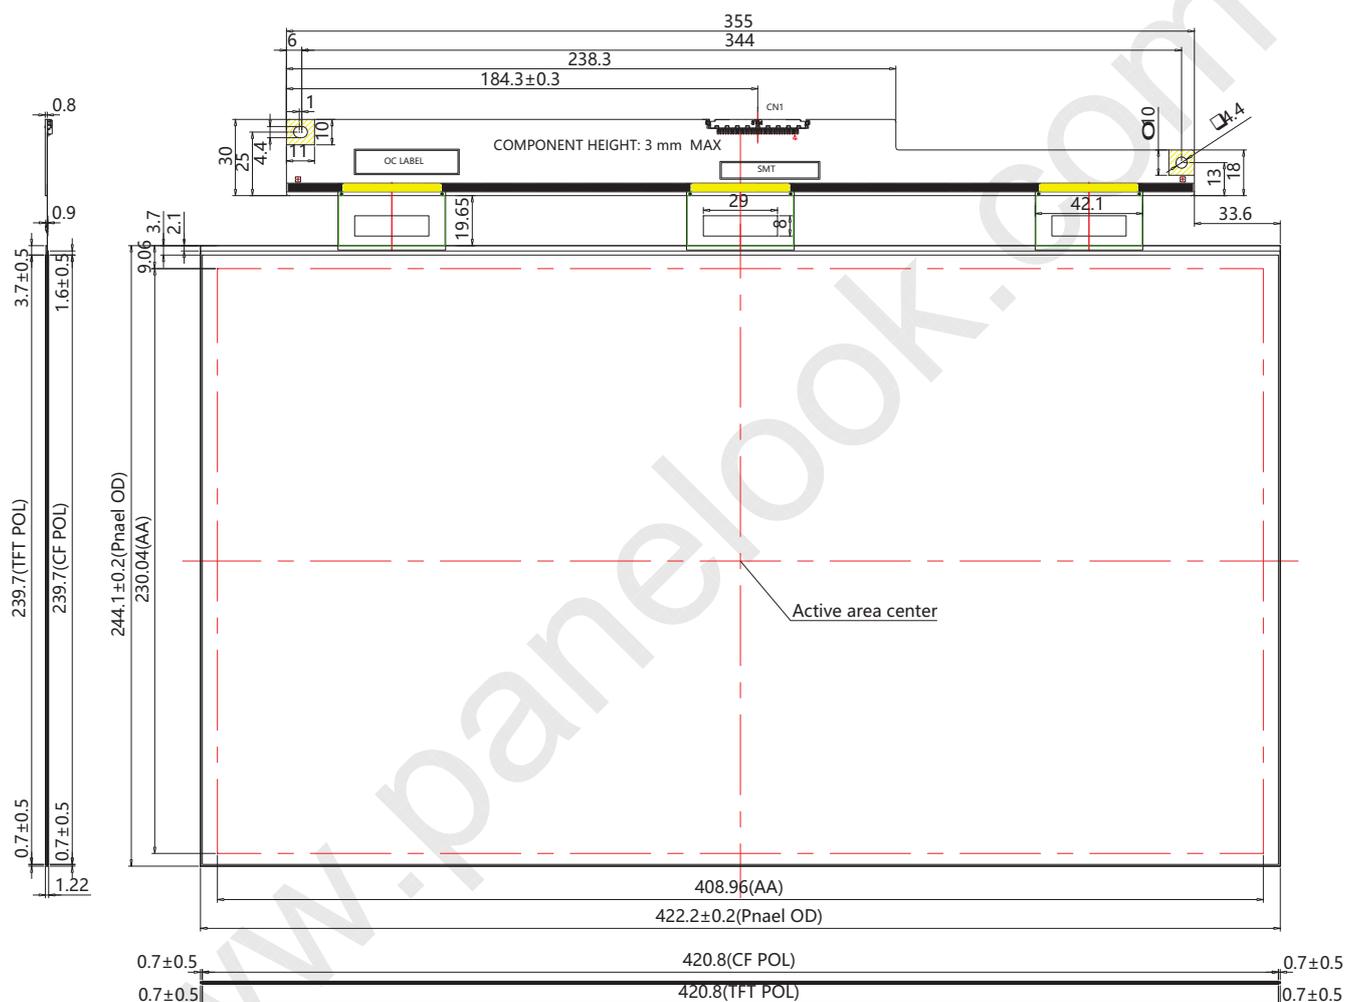

## 1. PANEL THICKNESS:

- TFT GLASS : 0.5T
- CF GLASS : 0.4T
- TFT POL : 0.16T
- CF POL : 0.16T

## 2. General Tolerance: ±0.2

## 3. NO COMPONENT AREA:

4. HATCHING AREA:  GROUND AREA.

## 5. PCBA CNT:

CN1 : IS100-L300-C23

<b>BOE</b>	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	0	2022.03.21
SPEC. NUMBER S8-64-8D-170	SPEC. TITLE QV185FHB-N82 Product Specification		PAGE 32 OF 32

< Figure 3.TFT-LCD Open Cell Outline Dimensions (Back View) >

