

# KOE

## JDI Group

Kaohsiung Opto-Electronics Inc.

FOR MESSRS : \_\_\_\_\_

DATE : Jul. 20<sup>th</sup> ,2017

### CUSTOMER'S ACCEPTANCE SPECIFICATIONS

## TX23D200VM0BPA

### Contents

No.	ITEM	SHEET No.	PAGE
1	COVER	7B64PS 2701-TX23D200VM0BPA-4	1-1/1
2	RECORD OF REVISION	7B64PS 2702-TX23D200VM0BPA-4	2-1/2~2/2
3	GENERAL DATA	7B64PS 2703-TX23D200VM0BPA-4	3-1/1
4	ABSOLUTE MAXIMUM RATINGS	7B64PS 2704-TX23D200VM0BPA-4	4-1/1
5	ELECTRICAL CHARACTERISTICS	7B64PS 2705-TX23D200VM0BPA-4	5-1/2~2/2
6	OPTICAL CHARACTERISTICS	7B64PS 2706-TX23D200VM0BPA-4	6-1/2~2/2
7	BLOCK DIAGRAM	7B64PS 2707-TX23D200VM0BPA-4	7-1/1
8	RELIABILITY TESTS	7B64PS 2708-TX23D200VM0BPA-4	8-1/1
9	LCD INTERFACE	7B64PS 2709-TX23D200VM0BPA-4	9-1/9~9/9
10	OUTLINE DIMENSIONS	7B64PS 2710-TX23D200VM0BPA-4	10-1/2~2/2
11	TOUCH PANEL	7B64PS 2711-TX23D200VM0BPA-4	11-1/2~2/2
12	APPEARANCE STANDARD	7B64PS 2712-TX23D200VM0BPA-4	12-1/4~4/4
13	PRECAUTIONS	7B64PS 2713-TX23D200VM0BPA-4	13-1/2~2/2
14	DESIGNATION OF LOT MARK	7B64PS 2714-TX23D200VM0BPA-4	14-1/1

ACCEPTED BY: \_\_\_\_\_

PROPOSED BY: Oblack Tsai

## 2. RECORD OF REVISION

DATE	SHEET No.	SUMMARY																																																																	
Aug.30,'16	7B64PS 2703 – TX23D200VM0BPA-2 Page 3-1/1	<b>3.1 DISPLAY FEATURES</b> Revised : <table border="1"> <tr> <td>Power Consumption</td> <td>1.4 W for LCD ; 7.0W for backlight</td> </tr> </table> <p style="text-align: center;">↓</p> <table border="1"> <tr> <td>Power Consumption</td> <td>1.4 W for LCD ; 4.4W for backlight</td> </tr> </table>	Power Consumption	1.4 W for LCD ; 7.0W for backlight	Power Consumption	1.4 W for LCD ; 4.4W for backlight																																																													
	Power Consumption	1.4 W for LCD ; 7.0W for backlight																																																																	
	Power Consumption	1.4 W for LCD ; 4.4W for backlight																																																																	
7B64PS 2705 – TX23D200VM0BPA-2 Page 5-2/2	<b>5.2 BACKLIGHT CHARACTERISTICS</b> Revised : <table border="1"> <thead> <tr> <th>Item</th> <th>Condition</th> <th>Min.</th> <th>Typ.</th> <th>Max.</th> </tr> </thead> <tbody> <tr> <td rowspan="2">LED Forward Current (Dim Control)</td> <td>0V; 0% duty</td> <td>540</td> <td>580</td> <td>620</td> </tr> <tr> <td>3.3VDC; 100% Duty</td> <td></td> <td></td> <td></td> </tr> <tr> <td>LED lifetime</td> <td>580 mA</td> <td>-</td> <td>70K</td> <td>-</td> </tr> </tbody> </table> <p style="text-align: center;">↓</p> <table border="1"> <thead> <tr> <th>Item</th> <th>Condition</th> <th>Min.</th> <th>Typ.</th> <th>Max.</th> </tr> </thead> <tbody> <tr> <td rowspan="2">LED Forward Current (Dim Control)</td> <td>0V; 0% duty</td> <td>330</td> <td>370</td> <td>410</td> </tr> <tr> <td>3.3VDC; 100% Duty</td> <td></td> <td></td> <td></td> </tr> <tr> <td>LED lifetime</td> <td>370 mA</td> <td>-</td> <td>70K</td> <td>-</td> </tr> </tbody> </table> Note1、3 : 580mA → 370mA	Item	Condition	Min.	Typ.	Max.	LED Forward Current (Dim Control)	0V; 0% duty	540	580	620	3.3VDC; 100% Duty				LED lifetime	580 mA	-	70K	-	Item	Condition	Min.	Typ.	Max.	LED Forward Current (Dim Control)	0V; 0% duty	330	370	410	3.3VDC; 100% Duty				LED lifetime	370 mA	-	70K	-																												
Item	Condition	Min.	Typ.	Max.																																																															
LED Forward Current (Dim Control)	0V; 0% duty	540	580	620																																																															
	3.3VDC; 100% Duty																																																																		
LED lifetime	580 mA	-	70K	-																																																															
Item	Condition	Min.	Typ.	Max.																																																															
LED Forward Current (Dim Control)	0V; 0% duty	330	370	410																																																															
	3.3VDC; 100% Duty																																																																		
LED lifetime	370 mA	-	70K	-																																																															
7B64PS 2706 – TX23D200VM0BPA-2 Page 6-1/2	<b>6. OPTICAL CHARACTERISTICS</b> Revised : <table border="1"> <thead> <tr> <th>Item</th> <th>Symbol</th> <th>Condition</th> <th>Min.</th> <th>Typ.</th> <th>Max.</th> </tr> </thead> <tbody> <tr> <td>Brightness of White</td> <td>-</td> <td rowspan="3"><math>\phi = 0^\circ, \theta = 0^\circ</math>, 580 mA</td> <td>320</td> <td>400</td> <td>-</td> </tr> <tr> <td>Brightness Uniformity</td> <td>-</td> <td>75</td> <td>-</td> <td>-</td> </tr> <tr> <td>Contrast Ratio</td> <td>CR</td> <td>500</td> <td>800</td> <td>-</td> </tr> <tr> <td rowspan="2">Color Chromaticity</td> <td>Green</td> <td rowspan="2"><math>\phi = 0^\circ, \theta = 0^\circ</math></td> <td>X</td> <td>0.27</td> <td>0.32</td> <td>0.37</td> </tr> <tr> <td>Y</td> <td>0.50</td> <td>0.55</td> <td>0.60</td> </tr> </tbody> </table> <p style="text-align: center;">↓</p> <table border="1"> <thead> <tr> <th>Item</th> <th>Symbol</th> <th>Condition</th> <th>Min.</th> <th>Typ.</th> <th>Max.</th> </tr> </thead> <tbody> <tr> <td>Brightness of White</td> <td>-</td> <td rowspan="3"><math>\phi = 0^\circ, \theta = 0^\circ</math>, 370 mA</td> <td>320</td> <td>400</td> <td>-</td> </tr> <tr> <td>Brightness Uniformity</td> <td>-</td> <td>75</td> <td>-</td> <td>-</td> </tr> <tr> <td>Contrast Ratio</td> <td>CR</td> <td>500</td> <td>800</td> <td>-</td> </tr> <tr> <td rowspan="2">Color Chromaticity</td> <td>Green</td> <td rowspan="2"><math>\phi = 0^\circ, \theta = 0^\circ</math></td> <td>X</td> <td>0.27</td> <td>0.32</td> <td>0.37</td> </tr> <tr> <td>Y</td> <td>0.53</td> <td>0.58</td> <td>0.63</td> </tr> </tbody> </table>	Item	Symbol	Condition	Min.	Typ.	Max.	Brightness of White	-	$\phi = 0^\circ, \theta = 0^\circ$ , 580 mA	320	400	-	Brightness Uniformity	-	75	-	-	Contrast Ratio	CR	500	800	-	Color Chromaticity	Green	$\phi = 0^\circ, \theta = 0^\circ$	X	0.27	0.32	0.37	Y	0.50	0.55	0.60	Item	Symbol	Condition	Min.	Typ.	Max.	Brightness of White	-	$\phi = 0^\circ, \theta = 0^\circ$ , 370 mA	320	400	-	Brightness Uniformity	-	75	-	-	Contrast Ratio	CR	500	800	-	Color Chromaticity	Green	$\phi = 0^\circ, \theta = 0^\circ$	X	0.27	0.32	0.37	Y	0.53	0.58	0.63
Item	Symbol	Condition	Min.	Typ.	Max.																																																														
Brightness of White	-	$\phi = 0^\circ, \theta = 0^\circ$ , 580 mA	320	400	-																																																														
Brightness Uniformity	-		75	-	-																																																														
Contrast Ratio	CR		500	800	-																																																														
Color Chromaticity	Green	$\phi = 0^\circ, \theta = 0^\circ$	X	0.27	0.32	0.37																																																													
	Y		0.50	0.55	0.60																																																														
Item	Symbol	Condition	Min.	Typ.	Max.																																																														
Brightness of White	-	$\phi = 0^\circ, \theta = 0^\circ$ , 370 mA	320	400	-																																																														
Brightness Uniformity	-		75	-	-																																																														
Contrast Ratio	CR		500	800	-																																																														
Color Chromaticity	Green	$\phi = 0^\circ, \theta = 0^\circ$	X	0.27	0.32	0.37																																																													
	Y		0.53	0.58	0.63																																																														
7B64PS 2714 – TX23D200VM0BPA-2 Page 14-1/1	<b>14. DESIGNATION of LOT MARK</b> Added : <table border="1"> <thead> <tr> <th>Rev.No</th> <th>Item</th> <th>Remarks</th> </tr> </thead> <tbody> <tr> <td>A</td> <td>-</td> <td>-</td> </tr> <tr> <td>B</td> <td>LED Change</td> <td>PCN0927</td> </tr> </tbody> </table> Revised : <div style="display: flex; align-items: center; justify-content: center;"> <div style="border: 1px solid black; padding: 5px; text-align: center;">               TX23D200VM0BPA REV:A              3071T (5D) 000001              KOE MODE IN TAIWAN           </div> <div style="margin: 0 20px;">→</div> <div style="border: 1px solid black; padding: 5px; text-align: center;">               TX23D200VM0BPA REV:B              3071T (5D) 000001              KOE MADE IN TAIWAN           </div> </div>	Rev.No	Item	Remarks	A	-	-	B	LED Change	PCN0927																																																									
Rev.No	Item	Remarks																																																																	
A	-	-																																																																	
B	LED Change	PCN0927																																																																	



DATE	SHEET No.	SUMMARY																
Mar.1,'17	7B64PS 2711 – TX23D200VM0BPA-3 Page 11-1/2	11.2 ELECTRICAL CHARACTERISTICS Revised : <table border="1" data-bbox="683 244 1412 387"> <thead> <tr> <th data-bbox="683 244 991 286">Item</th> <th colspan="2" data-bbox="991 244 1412 286">Specification</th> </tr> </thead> <tbody> <tr> <td data-bbox="683 286 991 329" rowspan="2">Circuit resistance</td> <td data-bbox="991 286 1150 329">X-axis</td> <td data-bbox="1150 286 1412 329">400~1220Ω</td> </tr> <tr> <td data-bbox="991 329 1150 387">Y-axis</td> <td data-bbox="1150 329 1412 387">190~600Ω</td> </tr> </tbody> </table> <p style="text-align: center;">↓</p> <table border="1" data-bbox="683 434 1412 577"> <thead> <tr> <th data-bbox="683 434 991 477">Item</th> <th colspan="2" data-bbox="991 434 1412 477">Specification</th> </tr> </thead> <tbody> <tr> <td data-bbox="683 477 991 519" rowspan="2">Circuit resistance</td> <td data-bbox="991 477 1150 519">X-axis</td> <td data-bbox="1150 477 1412 519">310~1400Ω</td> </tr> <tr> <td data-bbox="991 519 1150 577">Y-axis</td> <td data-bbox="1150 519 1412 577">100~800Ω</td> </tr> </tbody> </table>	Item	Specification		Circuit resistance	X-axis	400~1220Ω	Y-axis	190~600Ω	Item	Specification		Circuit resistance	X-axis	310~1400Ω	Y-axis	100~800Ω
Item	Specification																	
Circuit resistance	X-axis	400~1220Ω																
	Y-axis	190~600Ω																
Item	Specification																	
Circuit resistance	X-axis	310~1400Ω																
	Y-axis	100~800Ω																
Jul.20,'17	7B64PS 2710 – TX23D200VM0BPA-4 Page 10-1/2	Revised : 12.2 LCD APPEARANCE SPECIFICATION  Note 1 : Revise The definitions of dot defect																
		10.1 FRONT VIEW Revised : All Page																
KAOHSIUNG OPTO-ELECTRONICS INC.	SHEET NO.	7B64PS 2702-TX23D200VM0BPA-4	PAGE	2-2/2														

### 3. GENERAL DATA

#### 3.1 DISPLAY FEATURES

This module is a 9" WVGA of 16:9 format of amorphous silicon TFT. The pixel format is vertical stripe and sub pixels are arranged as R(red), G(green), B(blue) sequentially. This display is RoHS compliant, and COG (chip on glass) technology and LED backlight are applied on this display.

Part Name	TX23D200VM0BPA
Module Dimensions	218.0(W) mm x 135.0(H) mm x 12.65 (D) mm
LCD Active Area	196.8(W) mm x 118.08(H) mm
Pixel Pitch	0.246(W) mm x 0.246(H) mm
Resolution	800 x 3(RGB)(W) x 480(H) dots
Color Pixel Arrangement	R, G, B Vertical stripe
LCD Type	Transmissive Color TFT; Normally Black
Display Type	Active Matrix
Number of Colors	16.7M Colors(6-bit + FRC)
Backlight	7 LEDs parallel x 3 serial (21 LEDs in total)
Weight	415g (typ.)
Interface	1ch-LVDS/Receiver ; 20 pins
Power Supply Voltage	3.3V for LCD; 12V for Backlight
Power Consumption	1.4 W for LCD ;4.4W for backlight
Viewing Direction	Super Wide Version (In Plane Switching)
Touch Panel	Resistive type; Film on Glass, 4-wire type; Antiglare surface

## 4. ABSOLUTE MAXIMUM RATINGS

Item	Symbol	Min.	Max.	Unit	Remarks
Supply Voltage	$V_{DD}$	0	4.0	V	-
Input Voltage of Logic	$V_I$	-0.3	$V_{DD}+0.3$	V	Note 1
Operating Temperature	$T_{op}$	-20	70	$^{\circ}C$	Note 2
Storage Temperature	$T_{st}$	-30	80	$^{\circ}C$	Note 2
Backlight Input Voltage	$V_{LED}$	-	15	V	-

Note 1: The rating is defined for the signal voltages of the interface such as DCLK, DE, DIM and RGB data bus.

Note 2: The maximum rating is defined as above based on the chamber temperature, which might be different from ambient temperature after assembling the panel into the application. Moreover, some temperature-related phenomenon as below needed to be noticed:

- Background color, contrast and response time would be different in temperatures other than  $25^{\circ}C$ .
- Operating under high temperature will shorten LED lifetime.

## 5. ELECTRICAL CHARACTERISTICS


### 5.1 LCD CHARACTERISTICS

 $T_a = 25\text{ }^\circ\text{C}, V_{SS} = 0\text{V}$ 

Item	Symbol	Condition	Min.	Typ.	Max.	Unit	Remarks
Power Supply Voltage	$V_{DD}$	-	3.0	3.3	3.6	V	-
Differential Input Voltage for LVDS Receiver Threshold	$V_I$	"H" level	-	-	+100	mV	Note 1
		"L" level	-100	-	-		
DPS,FRC,AMODE Signal Input Voltage	$V_I$	"H" level	$0.7V_{DD}$	-	$V_{DD}$	V	CMOS Level
		"L" level	0	-	$0.3V_{DD}$		
Power Supply Current	$I_{DD}$	$V_{DD}-V_{SS}=3.3\text{V}$	-	430	560	mA	Note 2,3
Vsync Frequency	$f_v$	-	-	60	75	Hz	Note 4
Hsync Frequency	$f_H$	-	-	31.3	39.4	KHz	Note 4
DCLK Frequency	$f_{CLK}$	-	-	33.3	35	MHz	Note 4

Note 1:  $V_{CM}=V_{DD} / 2\text{V}$

$V_{CM}$  is common mode voltage of LVDS transmitter / receiver .The input terminal of LVDS transmitter is terminated with  $100\Omega$ .

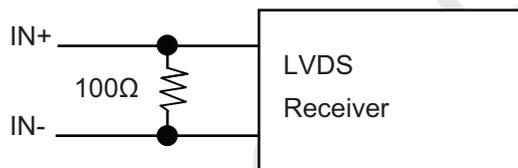

Note 2: An all white check pattern is used when measuring  $I_{DD}$ .  $f_v$  is set to 60 Hz

Note 3: 1.0A fuse is applied in the module for  $I_{DD}$ . For display activation and protection purpose, power supply is recommended larger than 2.5A to start the display and break fuse once any short circuit occurred.

Note 4: For LVDS Transmitter Input

## 5.2 BACKLIGHT CHARACTERISTICS

 $T_a = 25^\circ\text{C}$ 

Item	Symbol	Condition	Min.	Typ.	Max.	Unit	Remarks
LED Input Voltage	$V_{\text{LED}}$	-	11.5	12.0	12.5	V	Note1
LED Forward Current (Dim Control)	$I_{\text{LED}}$	0V; 0% duty	330	370	410	mA	Note 2
		3.3VDC; 100% duty	15	30	45		
LED lifetime	-	370 mA	-	70K	-	hrs	Note 3

Note 1: As Fig. 5.1 shown, LED current is constant, 370 mA, controlled by the LED driver when applying 12V  $V_{\text{LED}}$ .

Note 2: Dimming function can be obtained by applying DC voltage or PWM signal from the display interface CN1. The recommended PWM signal is 1K ~ 10K Hz with 3.3V amplitude.

Note 3: The estimated lifetime is specified as the time to reduce 50% brightness by applying 370 mA at  $25^\circ\text{C}$ .

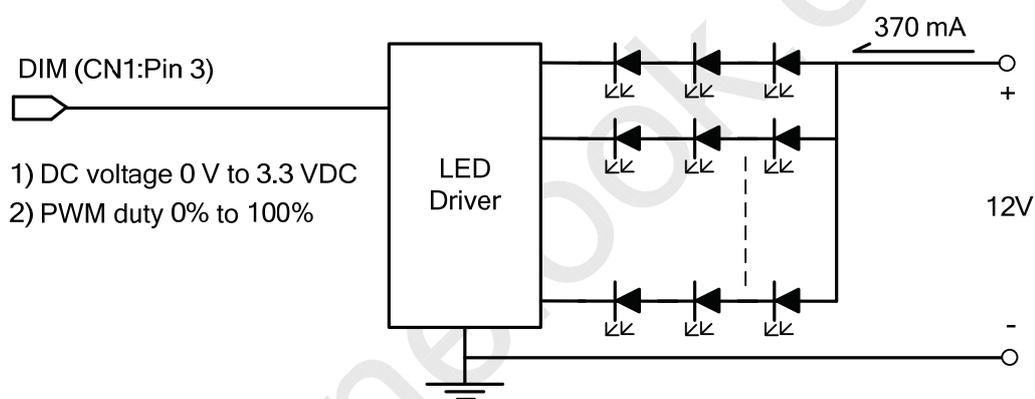


Fig. 5.1

## 6. OPTICAL CHARACTERISTICS

The optical characteristics are measured based on the conditions as below:

- Supplying the signals and voltages defined in the section of electrical characteristics.
- The backlight unit needs to be turned on for 30 minutes.
- The ambient temperature is 25°C.
- In the dark room around 500~1000 lx, the equipment has been set for the measurements as shown in Fig 6.1.

$$T_a = 25^\circ\text{C}, f_v = 60\text{ Hz}, V_{DD} = 3.3\text{V}$$



Item	Symbol	Condition	Min.	Typ.	Max.	Unit	Remarks	
Brightness of White	-	$\phi = 0^\circ, \theta = 0^\circ,$ $I_{LED} = 370\text{ mA}$	320	400	-	cd/m <sup>2</sup>	Note 1	
Brightness Uniformity	-		75	-	-	%	Note 2	
Contrast Ratio	CR		500	800	-	-	Note 3	
Response Time	Rise + Fall	$\phi = 0^\circ, \theta = 0^\circ$	-	40	50	ms	Note 4	
NTSC Ratio	-	$\phi = 0^\circ, \theta = 0^\circ$	-	50	-	%	-	
Viewing Angle	$\theta_x$	$\phi = 0^\circ, CR \geq 10$	-	85	-	Degree	Note 5	
	$\theta_{x'}$	$\phi = 180^\circ, CR \geq 10$	-	85	-			
	$\theta_y$	$\phi = 90^\circ, CR \geq 10$	-	85	-			
	$\theta_{y'}$	$\phi = 270^\circ, CR \geq 10$	-	85	-			
Color Chromaticity	Red	X	$\phi = 0^\circ, \theta = 0^\circ$	0.56	0.61	0.66	-	Note 6
		Y		0.28	0.33	0.38		
	Green	X		0.27	0.32	0.37		
		Y		0.53	0.58	0.63		
	Blue	X		0.10	0.15	0.20		
		Y		0.07	0.12	0.17		
	White	X		0.27	0.32	0.37		
		Y		0.26	0.31	0.36		

Note 1: The brightness is measured from the panel center point, P5 in Fig. 6.2, for the typical value.

Note 2: The brightness uniformity is calculated by the equation as below:

$$\text{Brightness uniformity} = \frac{\text{Min. Brightness}}{\text{Max. Brightness}} \times 100\%$$

, which is based on the brightness values of the 9 points measured by BM-5 as shown in Fig. 6.2.

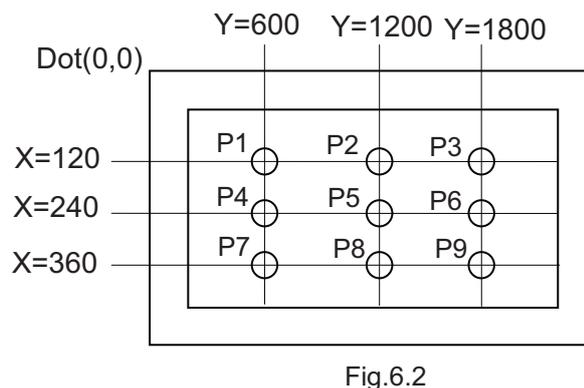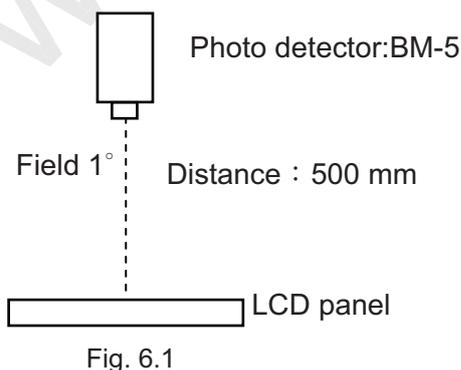

Note 3: The Contrast Ratio is measured from the center point of the panel, P5, and defined as the following equation:

$$CR = \frac{\text{Brightness of White}}{\text{Brightness of Black}}$$

Note 4: The definition of response time is shown in Fig. 6.3. The rising time is the period from 10% brightness to 90% brightness when the data is from black to white. Oppositely, Falling time is the period from 90% brightness rising to 10% brightness.

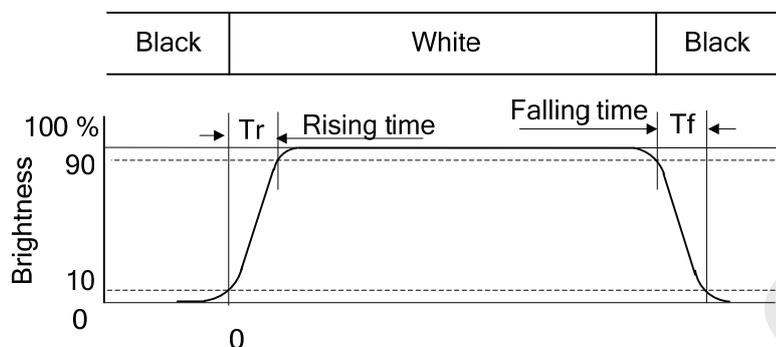


Fig. 6.3

Note 5: The definition of viewing angle is shown in Fig. 6.4. Angle  $\phi$  is used to represent viewing directions, for instance,  $\phi = 270^\circ$  means 6 o'clock, and  $\phi = 0^\circ$  means 3 o'clock. Moreover, angle  $\theta$  is used to represent viewing angles from axis Z toward plane XY.

The display is super wide viewing angle version;  $85^\circ$  viewing angle can be obtained from each viewing direction.


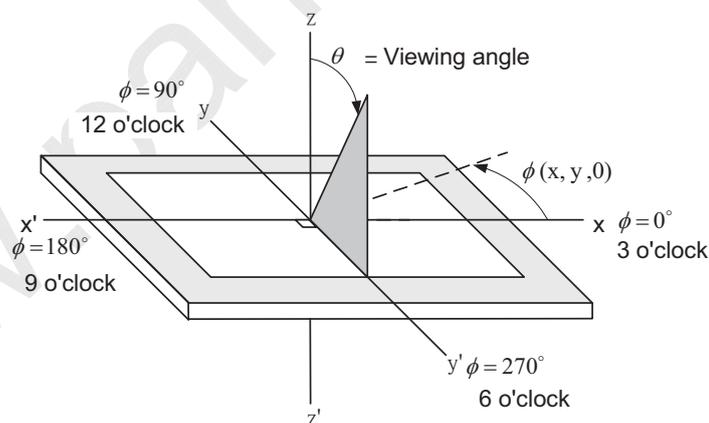


Fig 6.4

Note 6: The color chromaticity is measured from the center point of the panel, P5, as shown in Fig. 6.2.

## 7 BLOCK DIAGRAM

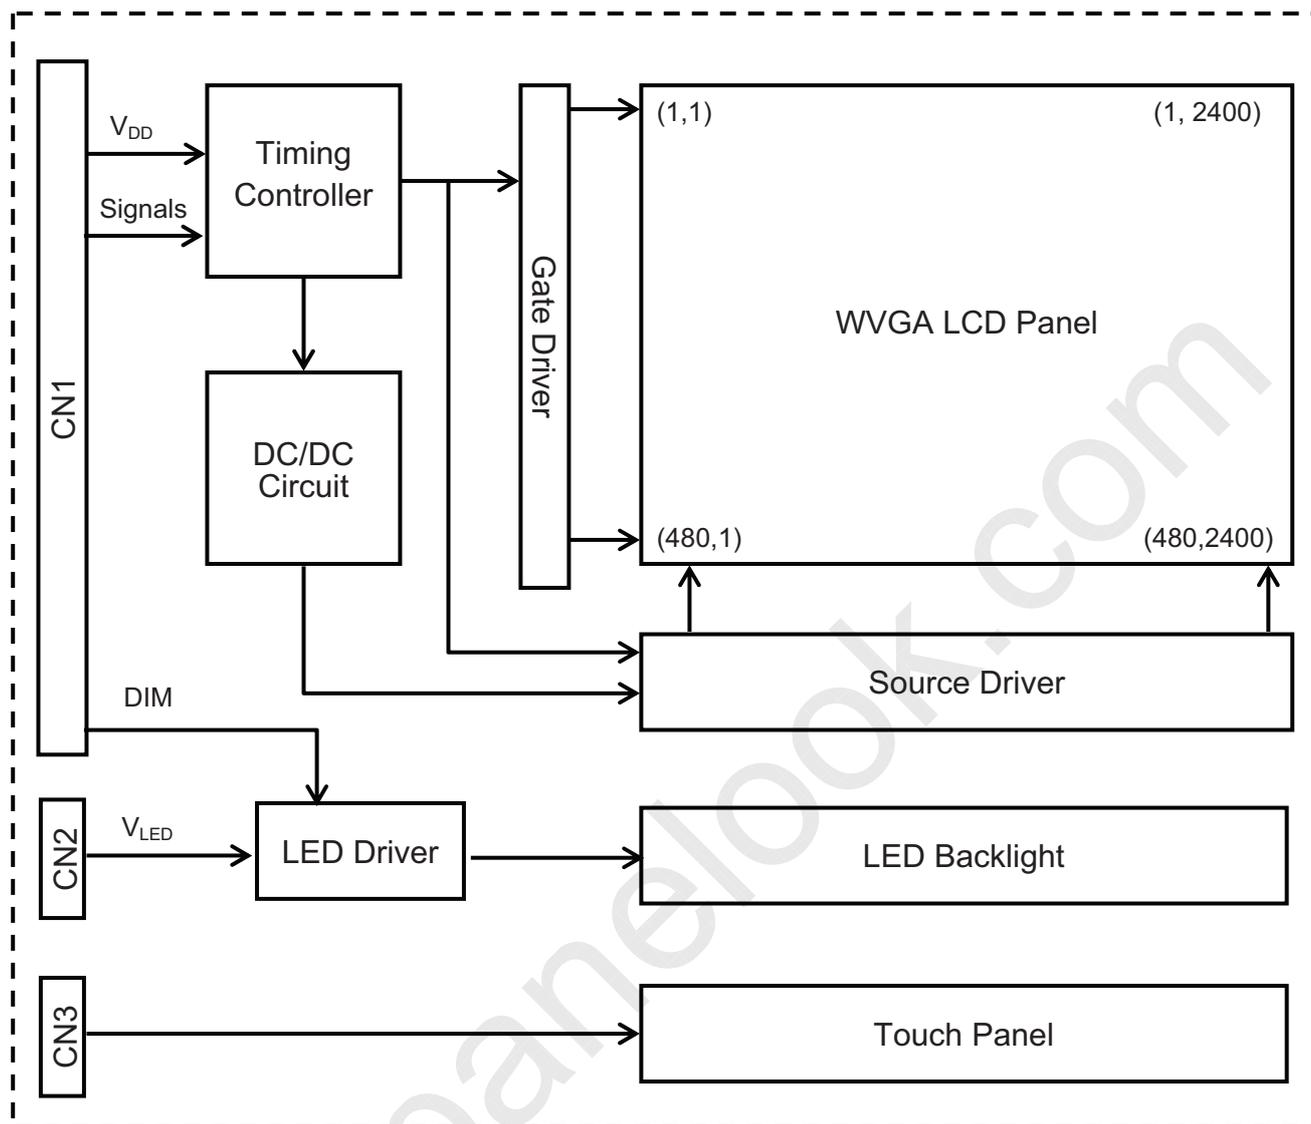

## 8. RELIABILITY TESTS

Test Item	Condition	
High Temperature	1) Operating 2) 70 °C	240 hrs
Low Temperature	1) Operating 2) -20 °C	240 hrs
High Temperature	1) Storage 2) 80 °C	240 hrs
Low Temperature	1) Storage 2) -30 °C	240 hrs
Heat Cycle	1) Operating 2) -20 °C ~70 °C 3) 3hrs~1hr~3hrs	240 hrs
Thermal Shock	1) Non-Operating 2) -35 °C ↔ 85 °C 3) 0.5 hr ↔ 0.5 hr	240 hrs
High Temperature & Humidity	1) Operating 2) 40 °C & 85%RH 3) Without condensation (Note3)	240 hrs
Vibration	1) Non-Operating 2) 20~200 Hz 3) 2G 4) X, Y, and Z directions	1 hr for each direction
Mechanical Shock	1) Non-Operating 2) 10 ms 3) 50G 4) ±X, ±Y and ±Z directions	Once for each direction
ESD	1) Operating 2) Tip: 200 pF, 250 Ω 3) Air discharge for glass: ± 8KV 4) Contact discharge for metal frame: ± 8KV	1) Glass: 9 points 2) Metal frame: 8 points (Note4)

Note 1: Display functionalities are inspected under the conditions defined in the specification after the reliability tests.

Note 2: The display is not guaranteed for use in corrosive gas environments.

Note 3: Under the condition of high temperature & humidity, if the temperature is higher than 40°C, the humidity needs to be reduced as Fig. 8.1 shown.

Note 4: All pins of LCD interface(CN1) have been tested by ± 100V contact discharge of ESD under non-operating condition.

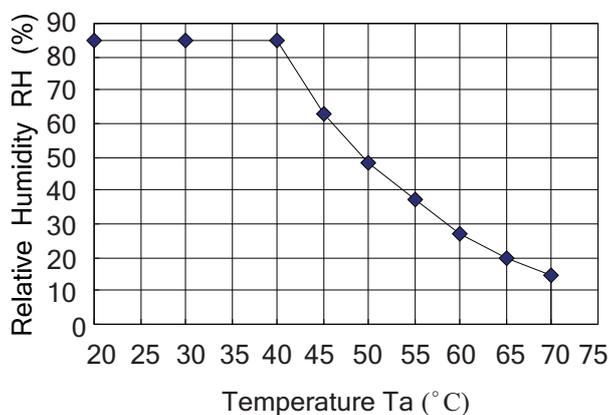


Fig. 8.1

## 9. LCD INTERFACE

### 9.1 INTERFACE PIN CONNECTIONS

The display interface connector (CN1) is FI-SEB20P-HF13E made by JAE and more details of the connector are shown in the section of outline dimension. Pin assignment of LCD interface is as below:

Pin No.	Symbol	Description	Remarks
1	V <sub>DD</sub>	Power Supply (typ.+3.3V)	Note 1
2	V <sub>DD</sub>		
3	DIM	Backlight diming	Note 4
4	V <sub>SS</sub>	GND (0V)	Note 2
5	IN0-	Pixel Data	Note 3
6	IN0+		
7	V <sub>SS</sub>	GND (0V)	Note 2
8	IN1-	Pixel Data	Note 3
9	IN1+		
10	V <sub>SS</sub>	GND (0V)	Note 2
11	IN2-	Pixel Data	Note 3
12	IN2+		
13	V <sub>SS</sub>	GND (0V)	Note 2
14	CLK IN-	Clock	Note 3
15	CLK IN+		
16	V <sub>SS</sub>	GND (0V)	Note 2
17	IN3-	Pixel Data	Note 3
18	IN3+		
19	V <sub>SS</sub>	GND (0V)	Note 2
20	AMODE	L: 8bit (default) ,.H : 8bit / 6bit	-

Note 1: All V<sub>DD</sub> pins should be connected to +3.3V.

Note 2: All V<sub>SS</sub> pins should be connected to GND(0V),Metal bezel is connected internally to V<sub>SS</sub>.

Note 3: In n- and n+ (n=0,1,2,3), CLK IN- and CLK IN+ should be wired by twist-pairs or side by side FPC patterns, respectively.


Note 4: Normal brightness: 0V or 0% PWM duty; Brightness control: 0V to 3.3V DC or 0% to 100% PWM duty.

The backlight interface connector (CN2) is SM08B-SRSS-TB made by JST, and pin assignment of backlight is as below:

Pin No.	Signal	Function
1~3	V <sub>LED+</sub>	Power Supply for LED(12V)
4~5	NC	No Connection
6~8	V <sub>LED-</sub>	GND


## 9.2 LVDS INTERFACE

### 1) 8Bit Mode ( AMODE = LOW )

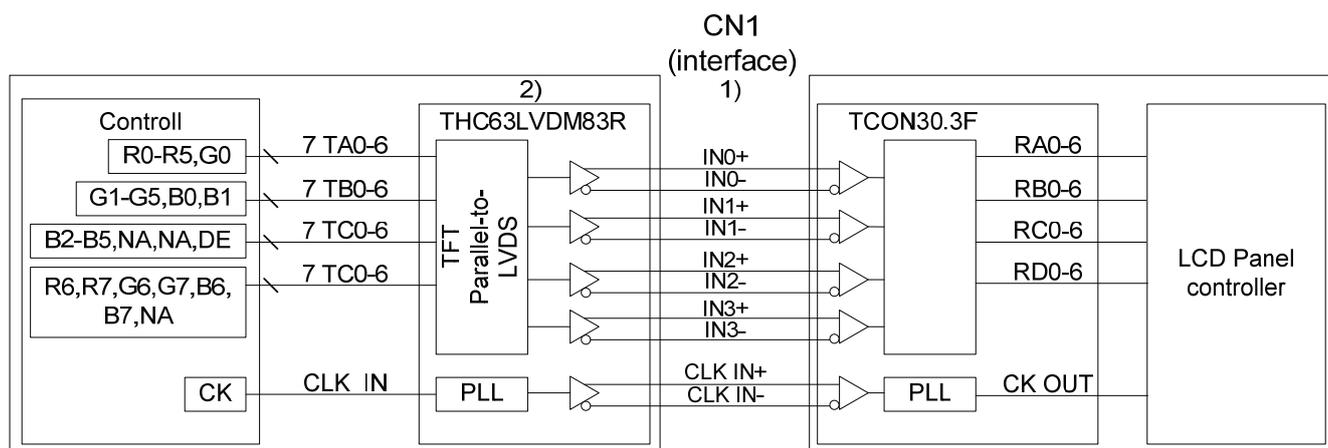


### 2) 8Bit / 6Bit Mode( AMODE = HIGH )

#### ① 8Bit Mode

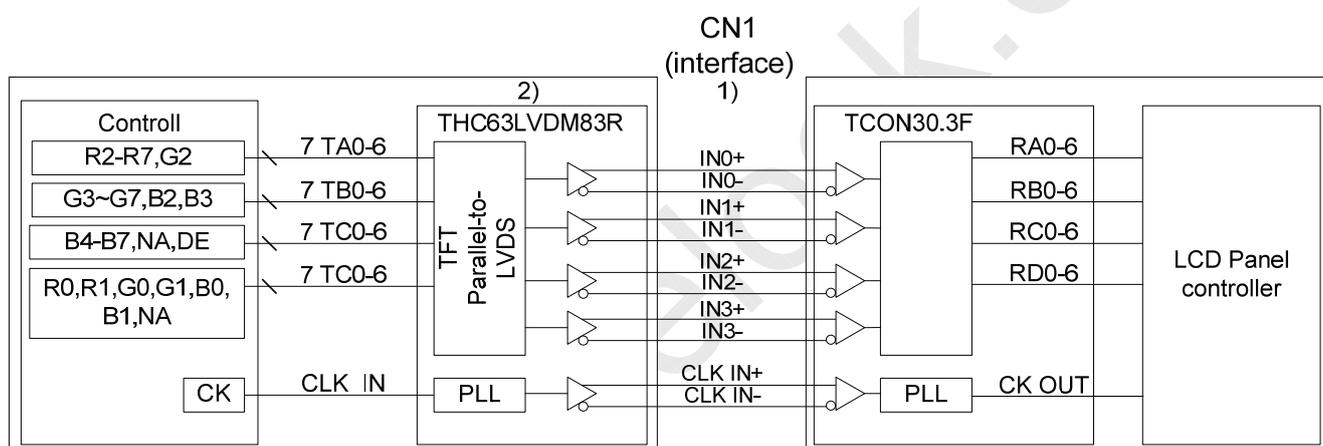

#### ② 6Bit Mode

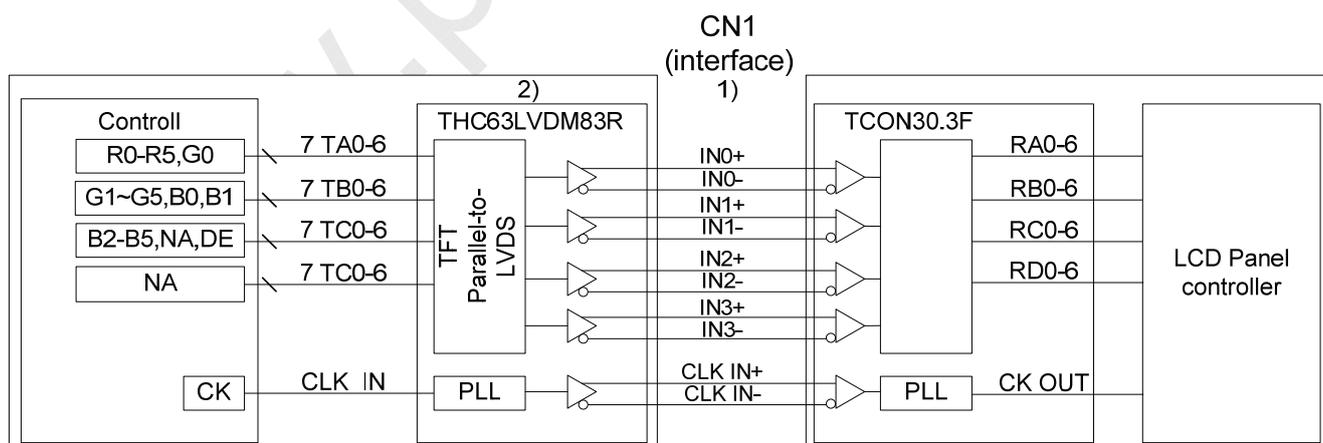


Note 1: 100Ω impedance of LVDS cable is recommended for best optical performance.

Note 2: Transmitter Made by Thine : THC63LVDM83R or equivalent.


## 9.3 DATA MAPPING

Transmitter		8Bit Mode	8Bit Mode	6Bit Mode
Pin No.	Pin name	AMODE		
		LOW	HIGH	
51	TA0	R0(LSB)	R2	R0(LSB)
52	TA1	R1	R3	R1
54	TA2	R2	R4	R2
55	TA3	R3	R5	R3
56	TA4	R4	R6	R4
3	TA5	R5	R7(MSB)	R5(MSB)
4	TA6	G0(LSB)	G2	G0(LSB)
6	TB0	G1	G3	G1
7	TB1	G2	G4	G2
11	TB2	G3	G5	G3
12	TB3	G4	G6	G4
14	TB4	G5	G7(MSB)	G5(MSB)
15	TB5	B0(LSB)	B2	B0(LSB)
19	TB6	B1	B3	B1
20	TC0	B2	B4	B2
22	TC1	B3	B5	B3
23	TC2	B4	B6	B4
24	TC3	B5	B7(MSB)	B5(MSB)
27	TC4	(NA)	(NA)	(NA)
28	TC5	(NA)	(NA)	(NA)
30	TC6	DE	DE	DE
50	TD0	R6	R0(LSB)	(NA)
2	TD1	R7(MSB)	R1	(NA)
8	TD2	G6	G0(LSB)	(NA)
10	TD3	G7(MSB)	G1	(NA)
16	TD4	B6	B0(LSB)	(NA)
18	TD5	B7(MSB)	B1	(NA)
25	TD6	(NA)	(NA)	(NA)


## (1) 8Bit Mode (Amode=Low)

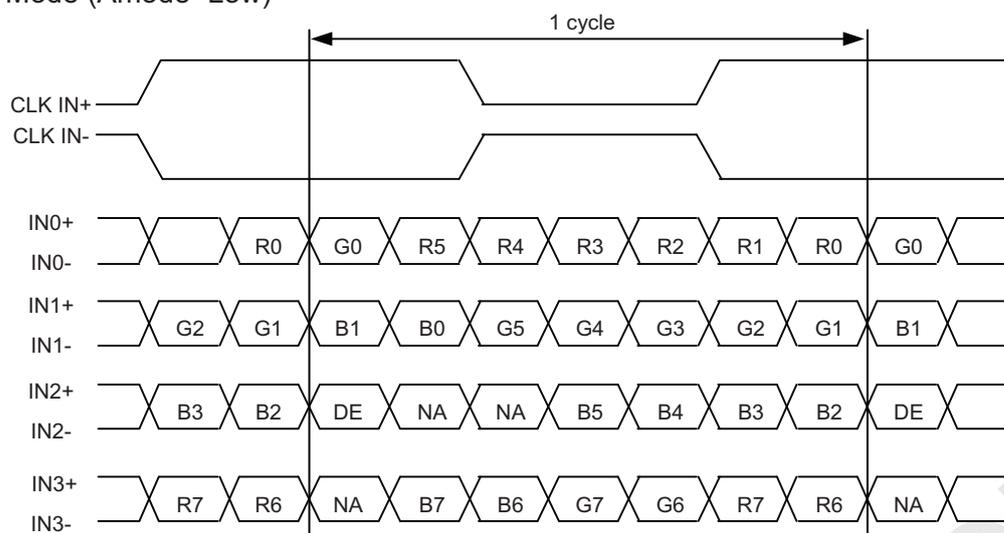

## (2) 8Bit Mode (Amode=High)

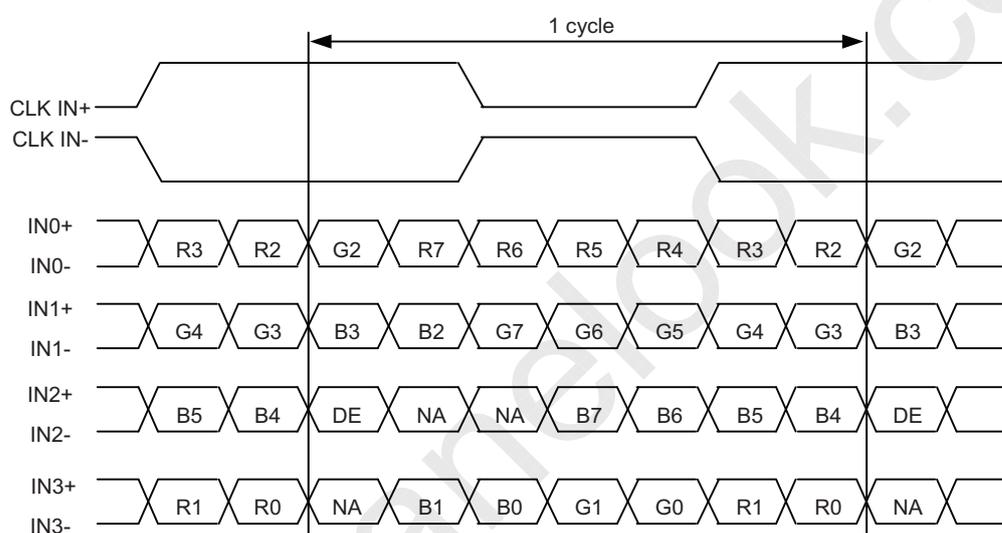

## (3) 6Bit Mode (Amode=High)

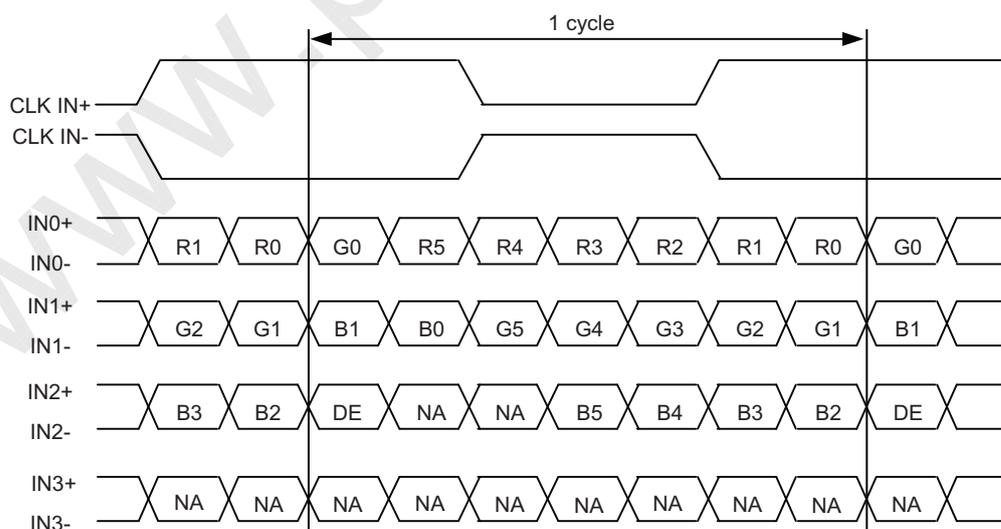

DE : Display Enable

NA : Not Available

## 9.4 DATA INPUT for DISPLAY COLOR

(8BIT MODE)

Input color		Red Data								Green Data								Blue Data							
		R7	R6	R5	R4	R3	R2	R1	R0	G7	G6	G5	G4	G3	G2	G1	G0	B7	B6	B5	B4	B3	B2	B1	B0
		MSB							LSB	MSB							LSB	MSB							LSB
Basic Color	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
	Red(255)	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
	Green(255)	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	
	Blue(255)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	
	Cyan	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	
	Magenta	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	
	Yellow	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	
	White	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	
Red	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
	Red(1)	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
	Red(2)	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
	Red(253)	1	1	1	1	1	1	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
	Red(254)	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
	Red(255)	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
Green	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
	Green(1)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0		
	Green(2)	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0		
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
	Green(253)	0	0	0	0	0	0	0	0	1	1	1	1	1	0	1	0	0	0	0	0	0	0		
	Green(254)	0	0	0	0	0	0	0	0	1	1	1	1	1	1	0	0	0	0	0	0	0	0		
	Green(255)	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	0	0	0	0	0	0	0		
Blue	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
	Blue(1)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1		
	Blue(2)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1		
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
	Blue(253)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	0		
	Blue(254)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	0		
	Blue(255)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1		

Note 1: Definition of gray scale : Color(n) Number in parenthesis indicates gray scale level. Larger number corresponds to brighter level.

Note 2: Data Signal : 1 : High, 0 : Low

## (6BIT MODE)

Input color		Red Data						Green Data						Blue Data					
		R5	R4	R3	R2	R1	R0	G5	G4	G3	G2	G1	G0	B5	B4	B3	B2	B1	B0
		MSB			LSB			MSB			LSB			MSB			LSB		
Basic Color	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red(63)	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0
	Green(63)	0	0	0	0	0	0	1	1	1	1	1	1	0	0	0	0	0	0
	Blue(63)	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1
	Cyan	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1
	Magenta	1	1	1	1	1	1	0	0	0	0	0	0	1	1	1	1	1	1
	Yellow	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0
	White	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Red	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red(1)	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0
	Red(2)	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	Red(61)	1	1	1	1	0	1	0	0	0	0	0	0	0	0	0	0	0	0
	Red(62)	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red(63)	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0
Green	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Green(1)	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0
	Green(2)	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	Green(61)	0	0	0	0	0	0	1	1	1	1	0	1	0	0	0	0	0	0
	Green(62)	0	0	0	0	0	0	1	1	1	1	1	0	0	0	0	0	0	0
	Green(63)	0	0	0	0	0	0	1	1	1	1	1	1	0	0	0	0	0	0
Blue	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Blue(1)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1
	Blue(2)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	Blue(61)	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	0	1
	Blue(62)	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	0
	Blue(63)	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1


Note 1: Definition of gray scale : Color(n) Number in parenthesis indicates gray scale level. Larger number corresponds to brighter level.

Note 2: Data Signal : 1 : High, 0 : Low

## 9.5 INTERFACE TIMING

### (1) LVDS Receiver Timing

(Interface of TFT module)

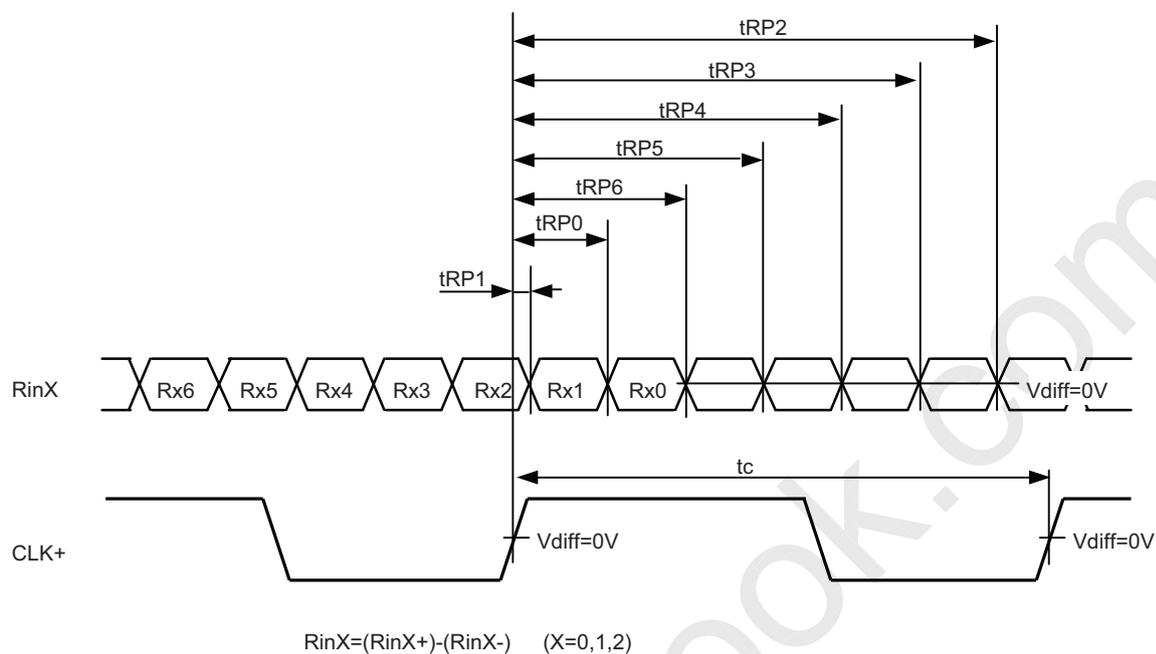


Item	Symbol	Min.	Typ.	Max.	Unit	
DCLK	FREQUENCY	$1/tc$	25.0	28.0 1)   33.3 2)	35.0	MHz
RinX (X=0,1,2)	0 data position	$t_{RP0}$	$1/7t_{CLK}-0.65$	$1/7*t_{CLK}$	$1/7t_{CLK}+0.65$	ns
	1st data position	$t_{RP1}$	-0.65	0	-0.65	
	2nd data position	$t_{RP2}$	$6/7t_{CLK}-0.65$	$6/7*t_{CLK}$	$6/7t_{CLK}+0.65$	
	3rd data position	$t_{RP3}$	$5/7t_{CLK}-0.65$	$5/7*t_{CLK}$	$5/7t_{CLK}+0.65$	
	4th data position	$t_{RP4}$	$4/7t_{CLK}-0.65$	$4/7*t_{CLK}$	$4/7t_{CLK}+0.65$	
	5th data position	$t_{RP5}$	$3/7t_{CLK}-0.65$	$3/7*t_{CLK}$	$3/7t_{CLK}+0.65$	
	6th data position	$t_{RP6}$	$2/7t_{CLK}-0.65$	$2/7*t_{CLK}$	$2/7t_{CLK}+0.65$	

Note 1:  $f_v=50\text{Hz}$

Note 2:  $f_v=60\text{Hz}$

## (2) Timing converter timing

(Input timing for transmitter)

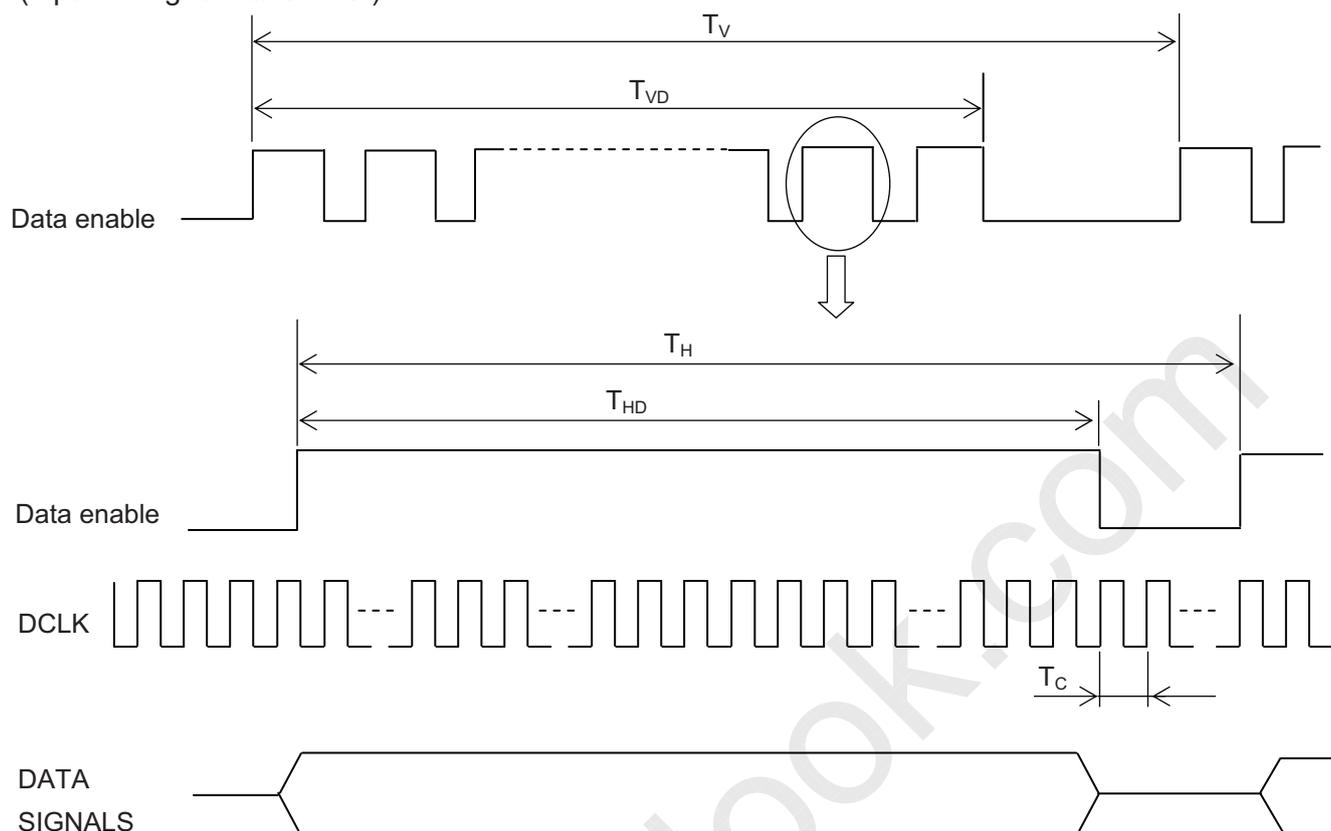


The timings except mentioned above are referred to the specifications of your transmitter.

	Item	Symbol	Min.	Typ.	Max.	Unit	Remarks
DCLK	Cycle time	$T_C$	28.6	30.0	40.0	ns	
Data Enable	Duty	D	0.45	0.5	0.55	-	
	Horizontal period	$T_H$	845	1056	1500	$T_C$	
	Horizontal width-Active	$T_{HD}$	800	800	800	$T_C$	
	Vertical period	$T_V$	483	525	640	$T_H$	
	Vertical width-Active	$T_{VD}$	480	480	480	$T_H$	
	Frame frequency	$f_v$	42	60	75	Hz	

## (3) Timing between interface signal and power supply

Power Supply, Input Signal and Backlight Voltage should comply with the following sequence.

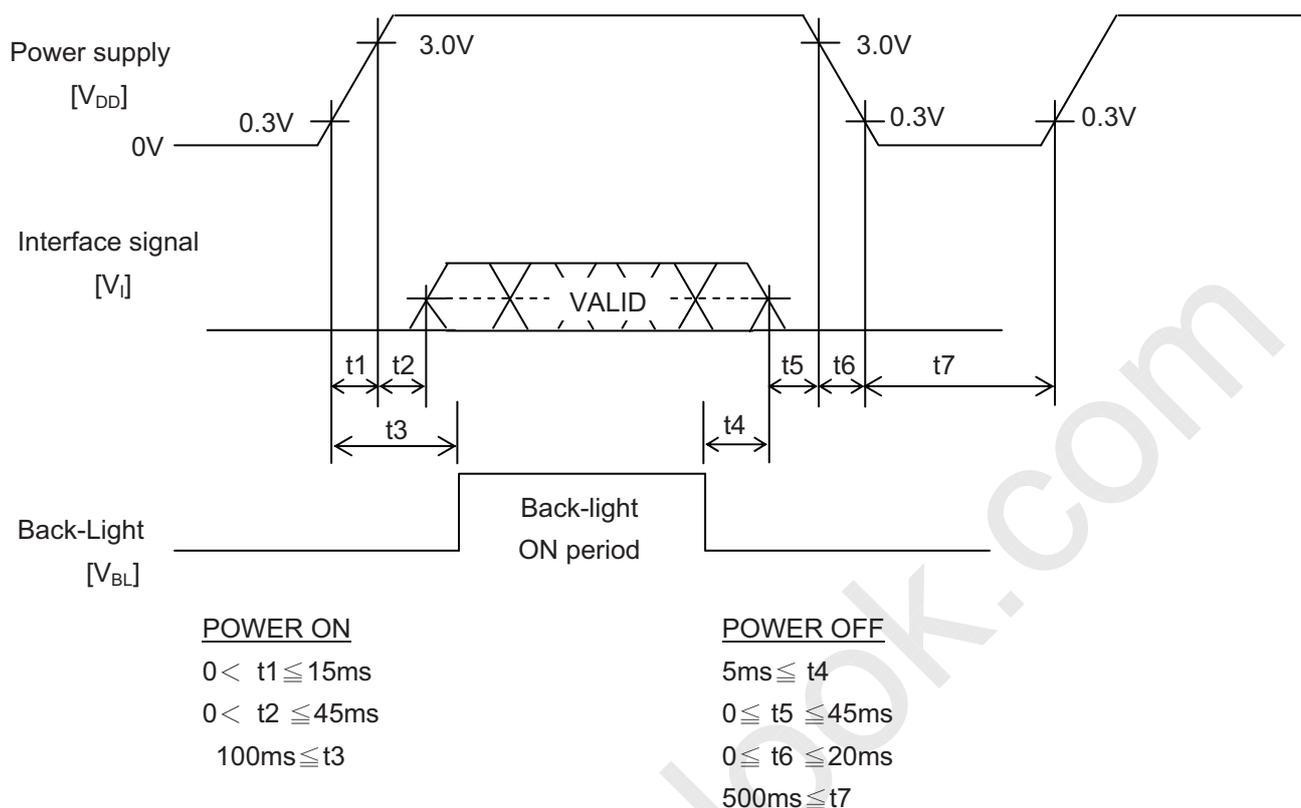


Note 1: In order to prevent electronic parts from destruction caused by latch-up, please input signal after Power Supply Voltage ON. In addition, please turn off signals before power supply voltage OFF.

Note 2: In order to prevent from function error due to residual charge, please reenter power supply voltage after time stipulated with  $t_7$ .

Note 3: Please turn on Backlight after signals fix and turn off before signals down, otherwise noise appears in the display. The noise cause no problem with display performance in case of timing sequence comply with the spec.

# 10. OUTLINE DIMENSIONS


## 10.1 FRONT VIEW

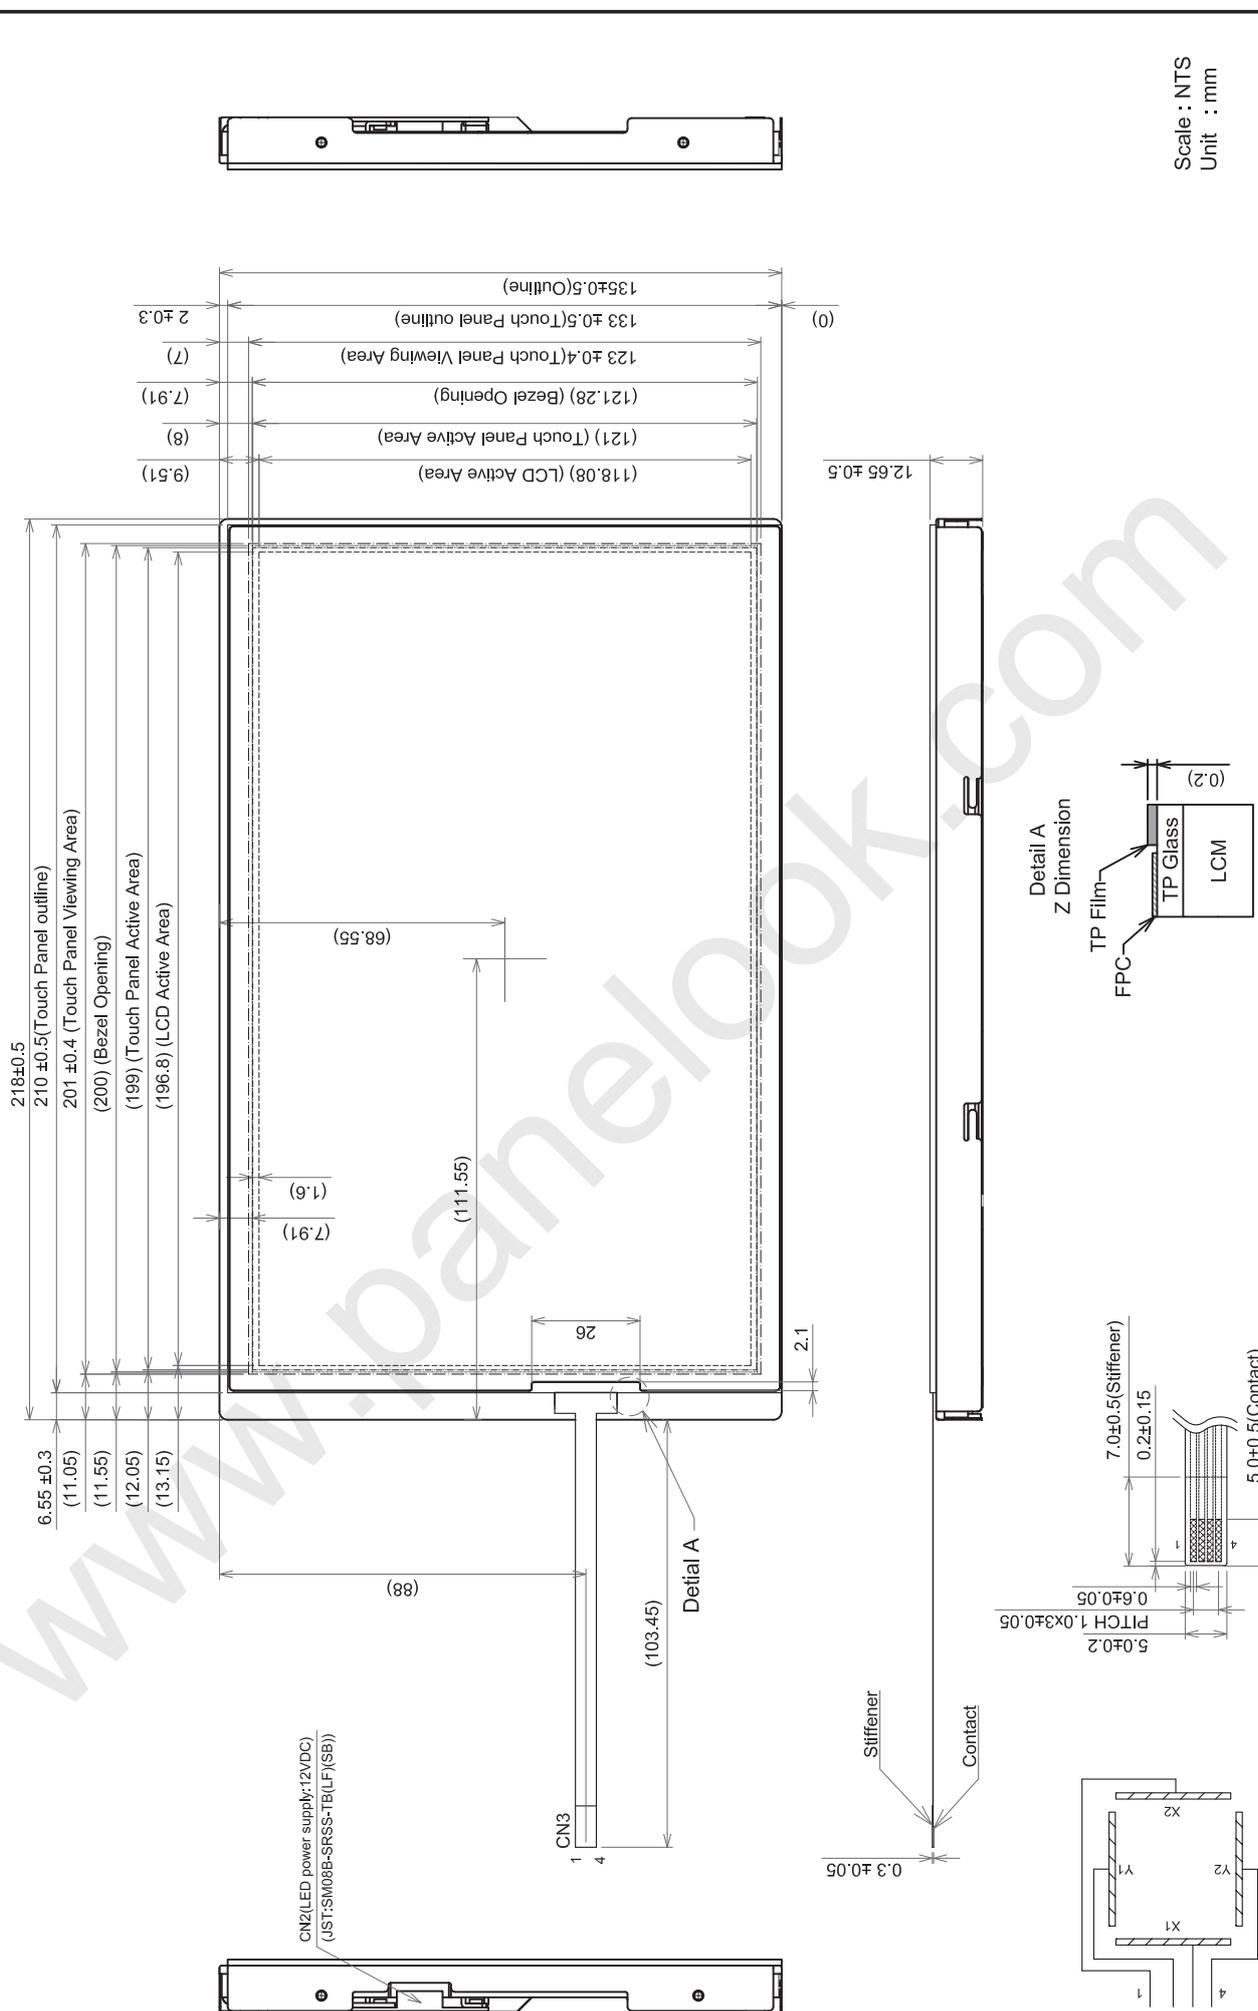

Scale : NTS  
Unit : mm

Detail of CN3

## 10.2 REAR VIEW

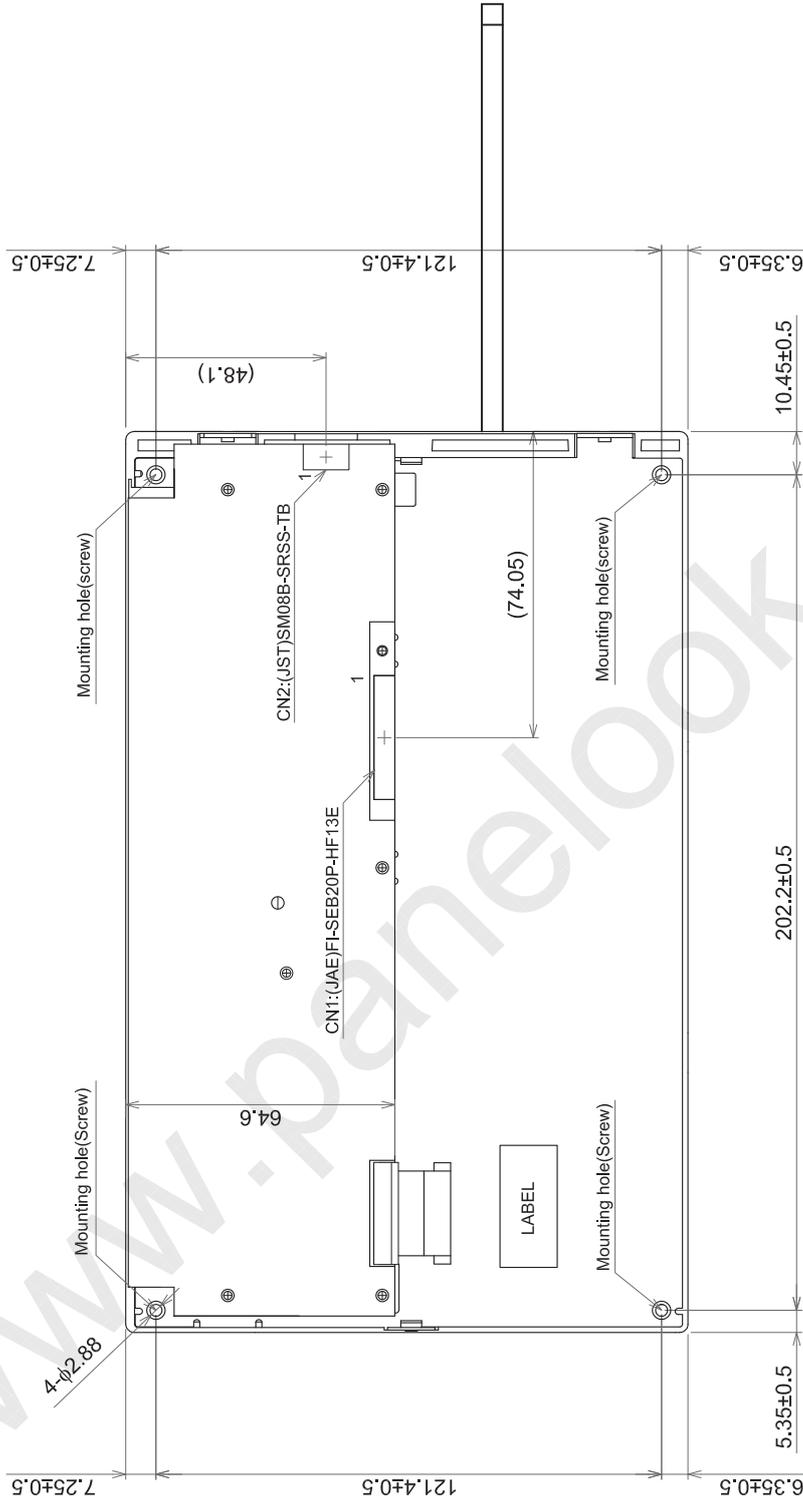

Note 1: Maximum length of screw for the mounting hole is 3.3mm

Scale : NTS  
Unit : mm

## 11. TOUCH PANEL

The type of touch panel used on this display is resistive, analog, 4-wire and film on glass, and more characteristics are shown as below:

### 11.1 OPERATING CONDITIONS

Item	Specification	Remarks
Operating Voltage	DC 5V	DC 7V Max.
Operating Current	20mA	-

### 11.2 ELECTRICAL CHARACTERISTICS

Item	Specification	Remarks
Circuit resistance	X-axis	310~1400Ω
	Y-axis	100~800Ω
Insulation Resistance	X-Y	>20MΩ
Linearity	X	≤ ± 1.5%
	Y	≤ ± 1.5%
Chattering	≤ 10ms	-

Note 1: The test conditions and equipments of linearity are as below:

- Material of pen: poly-acetal resin
- End shape: R 0.8 mm
- Test force: 150 gf
- Pitch: 10 mm
- Test area is shown in Fig. 11.1

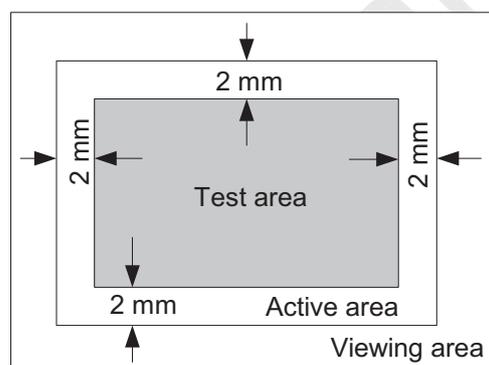


Fig. 11.1

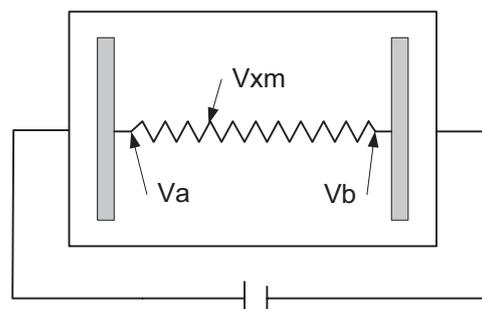


Fig. 11.2

As shown in Fig. 11.2, applying voltage meter to measure  $V_a$ ,  $V_b$  and  $V_{xm}$ , where  $V_a$  is the maximum voltage in the active area;  $V_b$  is the minimum voltage in the active area;  $V_{xm}$  is the measured voltage of point  $x$  selected by random. Afterwards, the linearity can be calculated by following equation:

$$Linearity = \frac{|V_{xi} - V_{xm}|}{V_a - V_b} \times 100\%$$

where  $V_{xi}$  is the idea voltage of point  $x$ .

The method to measure the linearity of Y-axis is the same as above.

### 11.3 MECHANICAL CHARACTERISTICS

Item		Specification	Remarks
Activation force	Finger	1.2N Max	End shape: R8.0 mm
	Pen	1.2N Max	End shape: R0.8 mm
Surface Hardness		3H	JIS K 5400

### 11.4 OPTICAL CHARACTERISTICS

Item	Specification	Remarks
Transmittance	>77%	-

### 11.5 SAFETY AND ATTENTIONS

- 1) Do not put heavy shock or stress on the touch panel.
- 2) Please use soft cloth or absorbent cotton with ethanol to clean the touch panel by gently wiping. Moreover, please wipe it by horizontal or vertical direction instead of circling to prevent leaving scars on the touch panel's surface.
- 3) Do not use any harmful chemicals such as acetone, toluene, and isopropyl alcohol to clean the display's surface.
- 4) UV protection is recommended to avoid the possibility of performance degrading when touch panel is likely applied under UV environment for a long period of time.

## 12. APPEARANCE STANDARD

The appearance inspection is performed in a dark room around 1200 lx based on the conditions as below:

- The distance between inspector's eyes and display is 30 cm.
- The viewing zone is defined with angle  $\theta$  shown in Fig. 12.1 The inspection should be performed within  $45^\circ$  when display is shut down. The inspection should be performed within  $5^\circ$  when display is power on.

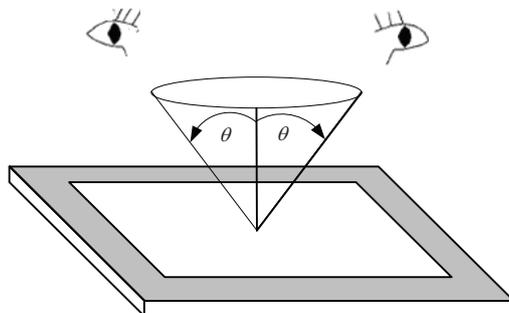


Fig. 11.1

### 12.1 THE DEFINITION OF LCD ZONE

LCD panel is divided into 3 areas as shown in Fig.12.2 for appearance specification in next section. A zone is the LCD active area (dot area); B zone is the area, which extended 1 mm out from LCD active area; C zone is the area between B zone and metal frame.

In terms of housing design, B zone is the recommended window area customers' housing should be located in.

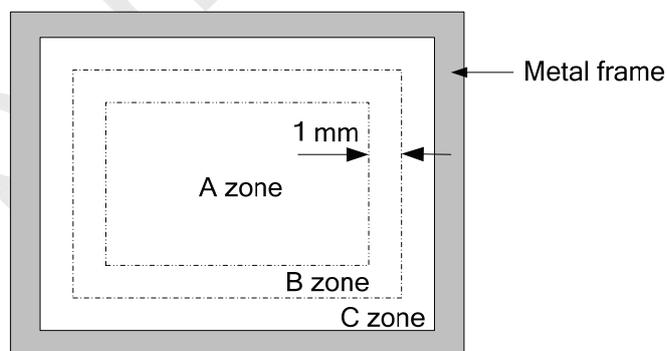


Fig. 11.2

## 12.2 LCD APPEARANCE SPECIFICATION

The specification as below is defined as the amount of unexpected phenomenon or material in different zones of LCD panel. The definitions of length, width and average diameter using in the table are shown in Fig. 12.3 and Fig. 12.4.

No	Item			Max. acceptable number	Unit	Applied Zone
				A-ZONE		
1	Dot defect (Note 1)	Bright dot-defect	1-dot	0	pcs	A
			Dark dot-defect	1-dot	3	
		2-dots		2	Units	
		3-dots		0		
		Total		3		
		Total		Density	1	
			Total	3	Units	
2	Line defect			Serious one is not allowed	-	-
3	Uneven brightness				-	-
4	Stain inclusion	$W \leq 0.02$	L : Ignore	Ignore	pcs	A,B
	Line shape W : width (mm)	$W \leq 0.03$	$L \leq 2.0$	10		
			$L > 2.0$	0		
	L : length (mm)	$W \leq 0.06$	$L \leq 1.0$	10		
			$L > 1.0$	0		
	$W > 0.06$	-	(See dot shape)			
5	Stain inclusion	$D \leq 0.22$		Ignore	pcs	A,B
	Dot shape D : ave. dia (mm)	$D \leq 0.33$		5		
		$D > 0.33$		0		
6	Scratch on polarizer	$W \leq 0.01$	L : Ignore	Ignore	pcs	A,B
	Line shape W : width (mm)	$W \leq 0.02$	$L \leq 40$	10		
			$L > 40$	0		
	L : length (mm)	$W \leq 0.04$	$L \leq 20$	10		
			$L > 20$	0		
7	Scratch on polarizer	$D \leq 0.2$		Ignore	pcs	A,B
	Dot shape D : ave. dia (mm)	$D \leq 0.4$		10		
		$D > 0.4$		0		
8	Bubbles, peeling In polarizer D:ave.dia(mm)	$D \leq 0.3$		Ignore	pcs	A
		$D \leq 0.5$		10		
		$D \leq 1.0$		5		
		$D > 1.0$		0		
9	Wrinkles on polarizer			Serious one is not allowed	-	-

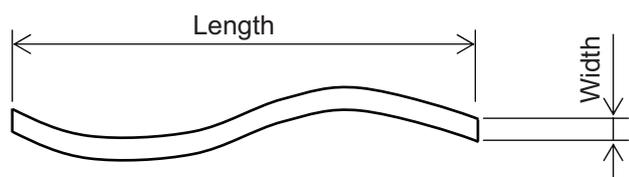


Fig 12.3



Fig 12.4

Note 1: The definitions of dot defect are as below:

- For bright dot-defect, showing black pattern, visible with 5% ND filter is defined.
- For dark dot-defect, showing white pattern, defect size over 1/2 dot area is defined.
- The definition of 1-dot-defect is the defect-dot, which is isolated and no adjacent defect-dot.
- The definition of adjacent dot is shown as Fig. 12.5.
- The Density of dot defect is defined in the area within diameter  $\phi = 10\text{mm}$ .

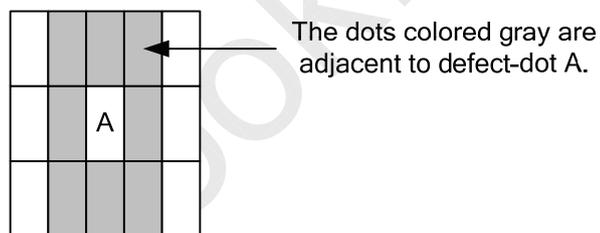





Fig. 12.5

### 12.3 TOUCH PANEL APPEARANCE SPECIFICATION

The specification as below is defined by the amount of unexpected material in different zones of touch panel.

Item	Criteria			Applied zone
	Width (mm)	Length (mm)	Maximum number	
Scratches	$W > 0.1$	$L \geq 10$	Not allowed	A, B
	$0.10 > W \geq 0.05$	$L < 10$	4 pcs max.	
	$0.05 \geq W$	$L < 10$	Ignored	
Foreign Materials	Filamentous (Line shape)			A, B
	Width (mm)	Length (mm)	Maximum number	
	$W > 0.10$	-	Dust (circular)	
	$0.10 \geq W > 0.05$	$3 < L$	Not allowed	
	$0.05 \geq W$	$L \leq 3$	Ignored	A, B
	Round (Dot shape)			
	Average diameter (mm)	Maximum number		
	$D > 0.3$	Not allowed		
	$0.3 \geq D > 0.2$	3 pcs max.		
$D \leq 0.2$	Ignored			

The limitation of glass flaw occurred on touch panel is defined in the table as below.

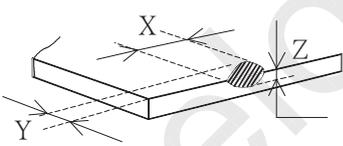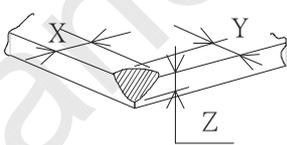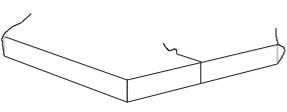Item	Specifications	
Edge flaw		$X \leq 5.0 \text{ mm}$ $Y \leq 1.0 \text{ mm}$ $Z \leq \text{Thickness}$
Corner flaw		$X \leq 3.0 \text{ mm}$ $Y \leq 3.0 \text{ mm}$ $Z \leq \text{Thickness}$
Progressive flaw		Not allowed

## 13. PRECAUTIONS

### 13.1 PRECAUTIONS OF TOUCH PANEL

1) Please refer to Fig. 13.1 for housing the display with touch panel into applications. The Fig. 13.1 shows some points as below:

- The cushion needs to be designed between housing and touch panel in order to avoid unexpected pressure to cause any wrong reactions, and the cushion should be located in the cushion area.
- The housing should not cover the active area of touch panel as the figure shown.

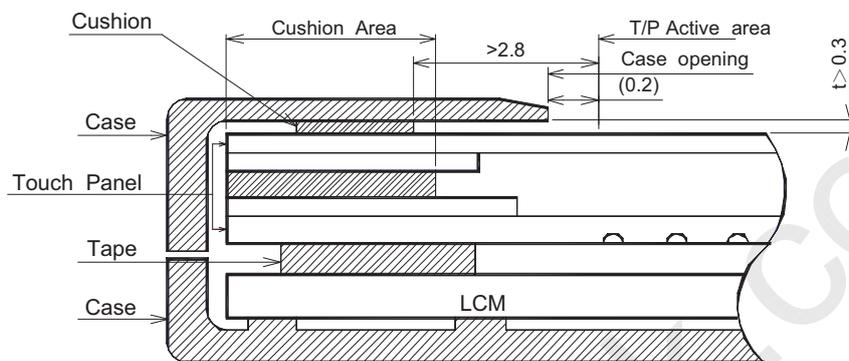


Fig. 13.1

### 13.2 PRECAUTIONS OF ESD

- 1) Before handling the display, please ensure your body has been connected to ground to avoid any damages by ESD. Also, do not touch display's interface directly when assembling.
- 2) Please remove the protection film very slowly before turning on the display to avoid generating ESD.

### 13.3 PRECAUTIONS OF HANDLING

- 1) In order to keep the appearance of display in good condition, please do not rub any surfaces of the displays by using sharp tools harder than 3H, especially touch panel, metal frame and polarizer.
- 2) Please do not stack the displays as this may damage the surface. In order to avoid any injuries, please avoid touching the edge of the glass or metal frame and wore gloves during handling.
- 3) Touching the polarizer or terminal pins with bare hand should be avoided to prevent staining and poor electrical contact.
- 4) Do not use any harmful chemicals such as acetone, toluene, and isopropyl alcohol to clean display's surfaces.
- 5) Please use soft cloth or absorbent cotton with ethanol to clean the display by gently wiping. Moreover, when wiping the display, please wipe it by horizontal or vertical direction instead of circling to prevent leaving scars on the display's surface, especially polarizer.
- 6) Please wipe any unknown liquids immediately such as saliva, water or dew on the display to avoid color fading or any permanent damages.
- 7) Maximum pressure to the surface of the display must be less than  $1.96 \times 10^4$  Pa. If the area of applied pressure is less than  $1 \text{ cm}^2$ , the maximum pressure must be less than 1.96N.


### 13.4 PRECAUTIONS OF STORAGE

If the displays are going to be stored for years, please be aware the following notices.

- 1) Please store the displays in a dark room to avoid any damages from sunlight and other sources of UV light.
- 2) The recommended long term storage temperature is between 10 C° ~35 C° and 55%~75% humidity to avoid causing bubbles between polarizer and LCD glasses, and polarizer peeling from LCD glasses.
- 3) It would be better to keep the displays in the container, which is shipped from KOE, and do not unpack it.
- 4) Please do not stick any labels on the display surface for a long time, especially on the polarizer.

## 14. DESIGNATION of LOT MARK

1) The lot mark is showing in Fig.14.1. First 4 digits are used to represent production lot, T represented made in Taiwan, and the last 6 digits are the serial number.

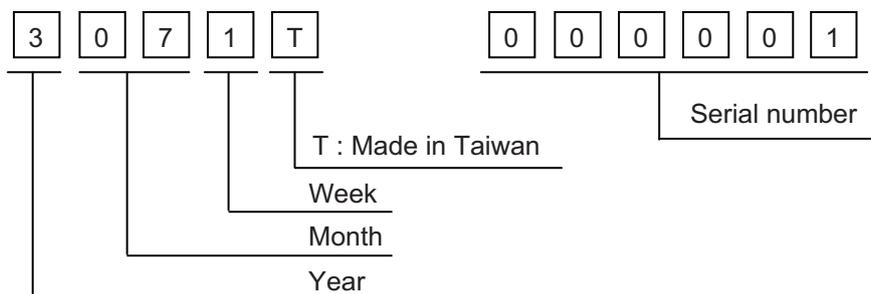

2) The tables as below are showing what the first 4 digits of lot mark are shorted for.

Year	Mark
2013	3
2014	4
2015	5
2016	6
2017	7

Month	Mark	Month	Mark
1	01	7	07
2	02	8	08
3	03	9	09
4	04	10	10
5	05	11	11
6	06	12	12

Week (Days)	Mark
1~7	1
8~14	2
15~21	3
22~28	4
29~31	5

3) Except letters I and O, revision number will be shown on lot mark and following letters A to Z.

Rev.No	Item	Remarks
A	-	-
B	LED Change	PCN0927

4) The location of the lot mark is on the back of the display shown in Fig. 14.1.

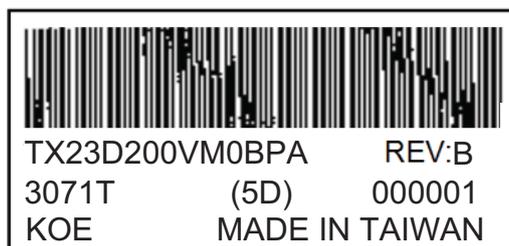


Fig 14.1