



CHIMEI INNOLUX DISPLAY CORPORATION

LCD FOG

SPECIFICATION

Customer: _____

Model Name: **ZE090NA-01B**

Date: **2013/08/27**

Version: **1.0**

☐ **Preliminary Specification**

☒ **Final Specification**

For Customer's Acceptance

Approved by	Comment

Approved by	Reviewed by	Prepared by
Stanley.CW.Leung	Green Fu	Sunny Sun



CHIMEI InnoLux copyright
2004
All rights reserved,
Copying forbidden.

Record of Revision

Version	Revise Date	Page	Content
Pre-Spec.01	2012/07/18		Initial Release.
Fin-Spec.1.0	2013/08/27	1	Update surface treatment and weight.
		6	V-COM tolerance change to +/-0.3
		19	Update packaging weight
		20~21	Update packaging drawing

CHIMEI INNOLUX

Contents

1. General Specifications	1
2. Pin Assignment	2
3. Operation Specifications	5
3.1. Absolute Maximum Ratings	5
3.1.1. Typical Operation Conditions	6
3.1.2. Current Consumption	7
3.2. Power Sequence	8
3.3. Timing Characteristics	9
3.3.1. AC Electrical Characteristics	9
3.3.2. Input Clock and Data Timing Diagram	9
3.3.3. DC Electrical Characteristics	10
3.3.4. Timing	11
3.3.5. Data Input Format	12
4. Optical Specifications	13
5. Reliability Test Items	16
6. General Precautions	17
6.1. Safety	17
6.2. Handling	17
6.3. Static Electricity	17
6.4. Storage	17
6.5. Cleaning	17
7. Mechanical Drawing	18
8. Package Drawing	19
8.1. Packaging Material Table	19
8.2. Packaging Quantity	19
8.3. Packaging Drawing	20



CHIMEI INNOLUX

Date :2013/08/27

Page:1/21

1. General Specifications

No.	Item	Specification	Remark
1	LCD size	9.0 inch(Diagonal)	
2	Driver element	a-Si TFT active matrix	
3	Resolution	1280 × 3(RGB) × 800	
4	Display mode	Normally White, Transmissive	
5	Dot pitch	0.0505(W) × 0.1515(H) mm	
6	Active area	193.920(W) × 121.200(H) mm	
7	Panel size	201.46(W) x 130.66(H) x 1.43 (D) mm	Note 1
8	Surface treatment	Plain	
9	Color arrangement	RGB-stripe	
10	Interface	Digital	
11	View direction(Gray Inversion)	12 O'Clock	
12	Panel power consumption	0.65W(typ)	
13	Weight	0.0835Kg	

Note 1: Refer to Mechanical Drawing.



CHIMEI INNOLUX

2. Pin Assignment

Date :2013/08/27

Page:2/21

FPC Connector is used for the module electronics interface. The model is F62240-H1210A manufactured by Vigorconn

Pin No.	Symbol	I/O	Function	Remark
1	VCOM	P	Common Voltage	
2	VDD	P	Power Voltage for digital circuit	
3	VDD	P	Power Voltage for digital circuit	
4	NC	---	No connection	
5	Reset	I	Global reset pin	
6	STBYB	I	Standby mode, Normally pulled high STBYB = "1", normal operation STBYB = "0", timing controller, source driver will turn off, all output are High-Z	
7	GND	P	Ground	
8	RXIN0-	I	- LVDS differential data input	
9	RXIN0+	I	+ LVDS differential data input	
10	GND	P	Ground	
11	RXIN1-	I	- LVDS differential data input	
12	RXIN1+	I	+ LVDS differential data input	
13	GND	P	Ground	
14	RXIN2-	I	- LVDS differential data input	
15	RXIN2+	I	+ LVDS differential data input	
16	GND	P	Ground	
17	RXCLKIN-	I	- LVDS differential clock input	
18	RXCLKIN+	I	+ LVDS differential clock input	
19	GND	P	Ground	
20	RXIN3-	I	- LVDS differential data input	
21	RXIN3+	I	+ LVDS differential data input	
22	GND	P	Ground	
23	NC	---	No connection	
24	NC	---	No connection	
25	GND	P	Ground	



CHIMEI INNOLUX

Date :2013/08/27

Page:3/21

26	NC	---	No connection	
27	DIMO	O	Backlight CABC controller signal output	
28	SELB	I	6bit/8bit mode select	Note1
29	AVDD	P	Power for Analog Circuit	
30	GND	P	Ground	
31	LED-	P	LED Cathode	
32	LED-	P	LED Cathode	
33	L/R	I	Horizontal inversion	Note3
34	U/D	I	Vertical inversion	Note3
35	VGL	P	Gate OFF Voltage	
36	CABCEN1	I	CABC H/W enable	Note2
37	CABCEN0	I	CABC H/W enable	Note2
38	VGH	P	Gate ON Voltage	
39	LED+	P	LED Anode	
40	LED+	P	LED Anode	

I: input, O: output, P: Power

Note1: If LVDS input data is 6 bits ,SELB must be set to High;
If LVDS input data is 8 bits ,SELB must be set to Low.

Note2: When CABC_EN="00", CABC OFF.
When CABC_EN="01", user interface image.
When CABC_EN="10", still picture.
When CABC_EN="11", moving image.
When CABC off, don't connect DIMO, else connect it to backlight.

Note3: When L/R="0", set right to left scan direction.
When L/R="1", set left to right scan direction.
When U/D="0", set top to bottom scan direction.
When U/D="1", set bottom to top scan direction.


CHIMEI INNOLUX

Date :2013/08/27

Page:4/21

Note: Definition of scanning direction.

Refer to the figure as below:

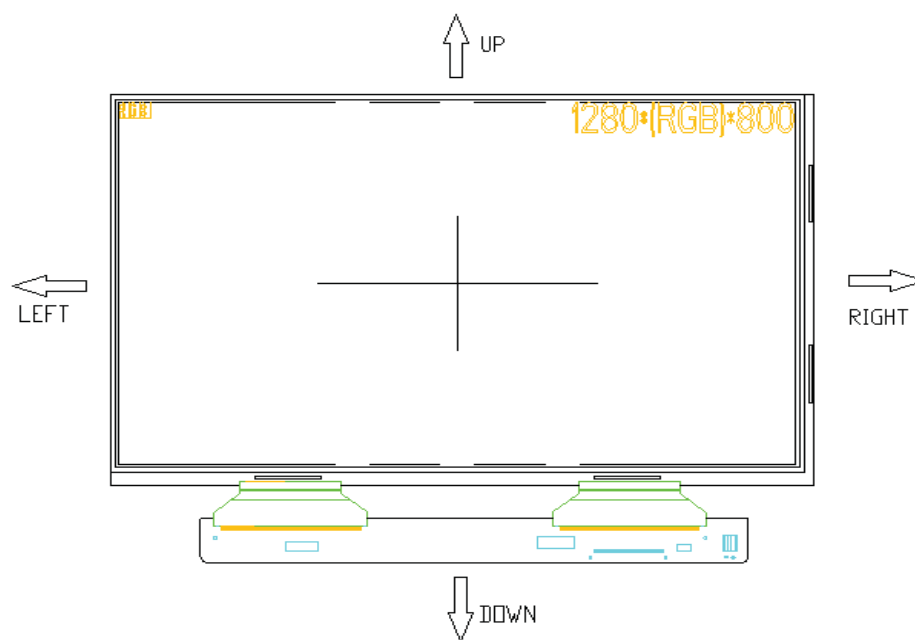

www.panelook.com



CHIMEI INNOLUX

Date :2013/08/27

Page:5/21

3. Operation Specifications

3.1. Absolute Maximum Ratings

(Note 1)

Item	Symbol	Values		Unit	Remark
		Min.	Max.		
Power voltage	V_{DD}	-0.3	5.0	V	
	AV_{DD}	6.5	15	V	
	V_{GH}	-0.3	42.0	V	
	V_{GL}	-20.0	0.3	V	
	$V_{GH}-V_{GL}$	-	40.0	V	
Operation Temperature	T_{OP}	-10	50	°C	
Storage Temperature	T_{ST}	-20	60	°C	

Note 1: The absolute maximum rating values of this product are not allowed to be exceeded at any times. Should a module be used with any of the absolute maximum ratings exceeded, the characteristics of the module may not be recovered, or in an extreme case, the module may be permanently destroyed.


3.1.1. Typical Operation Conditions

Item	Symbol	Values			Unit	Remark
		Min.	Typ.	Max.		
Power voltage	V_{DD}	3.1	3.3	3.5	V	Note 1
	AV_{DD}	10.8	11	11.2	V	
	V_{GH}	19.7	20	20.3	V	
	V_{GL}	-6.5	-6.8	-7.1	V	
Input signal voltage	V_{COM}	3.2	3.5	3.8	V	Note 3
Input logic high voltage	V_{IH}	$0.8V_{DD}$	-	V_{DD}	V	Note 2
Input logic low voltage	V_{IL}	0	-	$0.2 V_{DD}$	V	

Note 1: V_{DD} setting should match the signals output voltage (refer to Note 2) of customer's system board.

Note 2: LVDS, Reset.

Note 3: Typical V_{COM} is only a reference value, it must be optimized according to each LCM. Be sure to use VR.

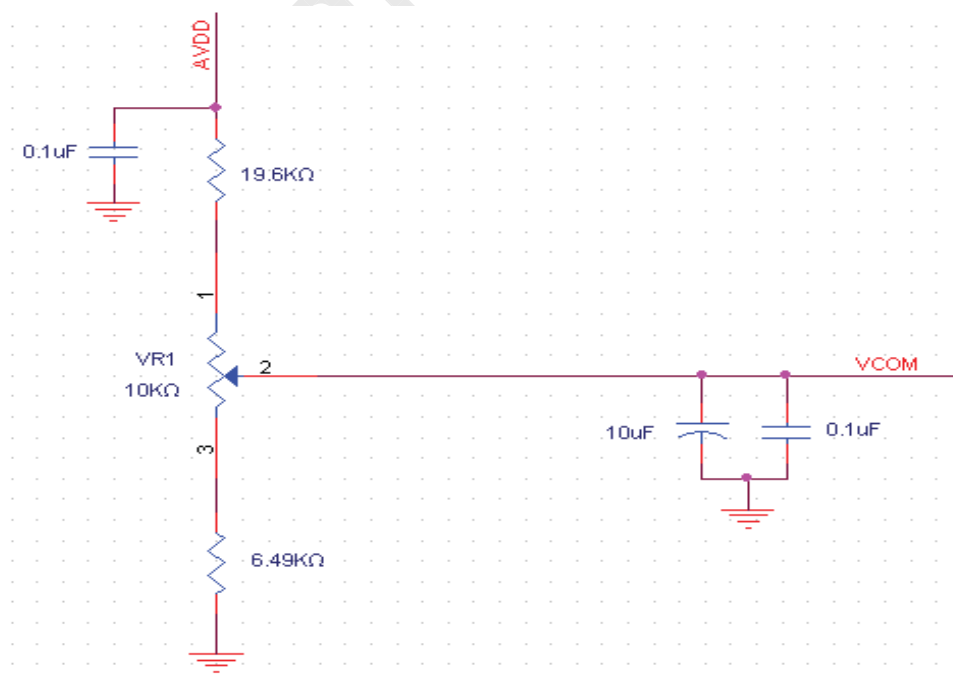



CHIMEI INNOLUX

Date :2013/08/27

Page:7/21

3.1.2. Current Consumption

Item	Symbol	Values			Unit	Remark
		Min.	Typ.	Max.		
Current for Driver	I_{GH}	-	0.52	1	mA	$V_{GH} = 20V$
	I_{GL}	-	0.52	1	mA	$V_{GL} = -6.8V$
	$I_{V_{DD}}$	-	62.5	95	mA	$V_{DD} = 3.3V$
	$I_{AV_{DD}}$	-	38.5	60	mA	$AV_{DD} = 11V$


CHIMEI INNOLUX

Date :2013/08/27


Page:8/21

3.2. Power Sequence

a. Power on:

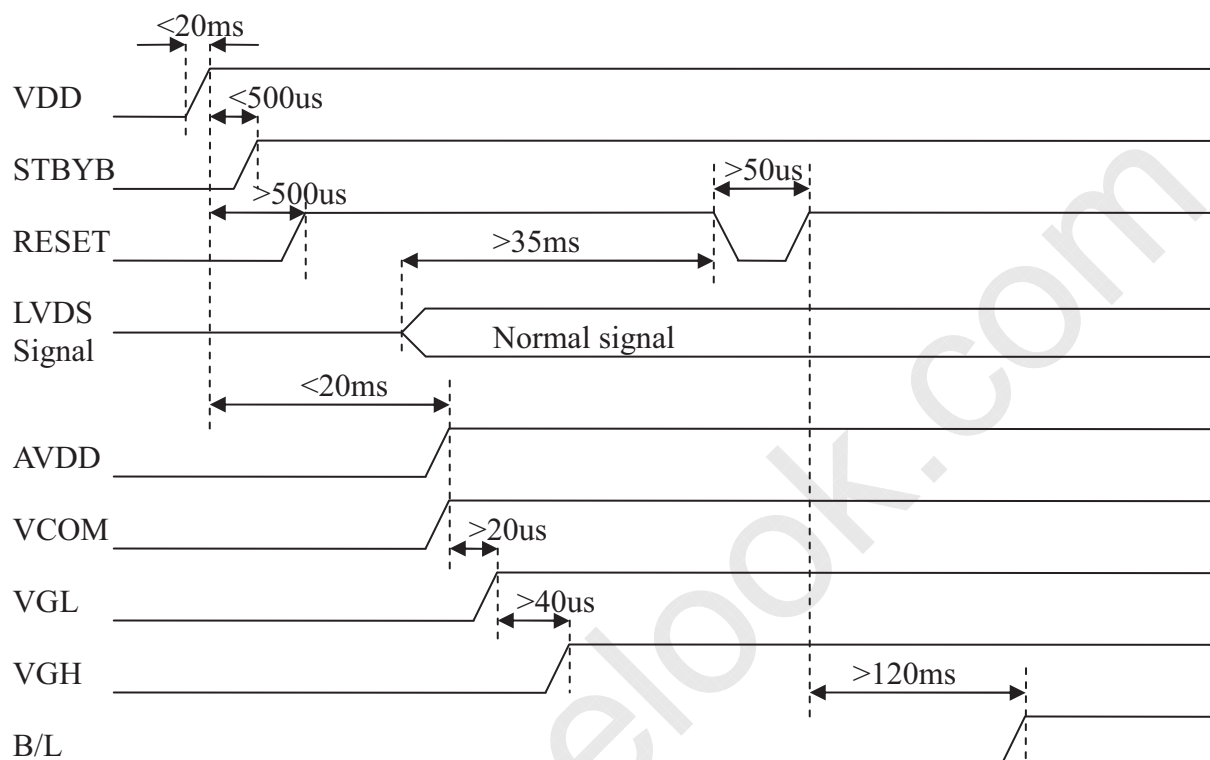

b. Power off:


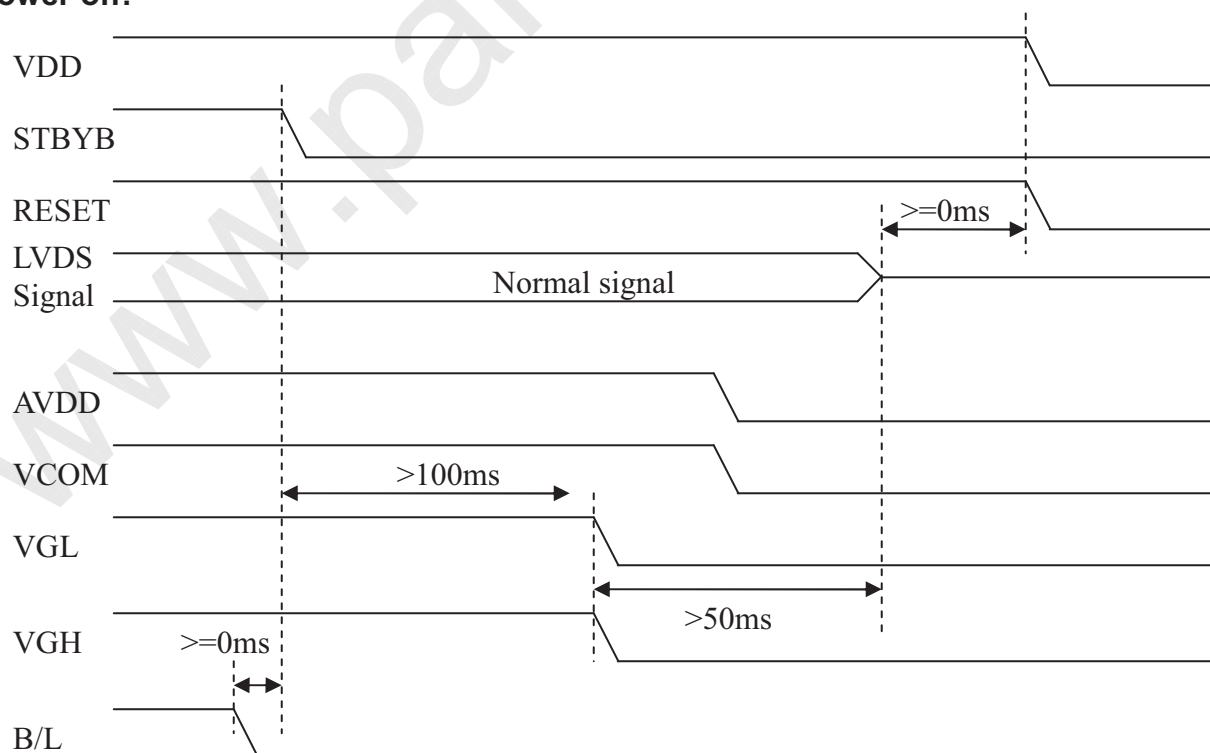


3.3. Timing Characteristics

3.3.1. AC Electrical Characteristics


Parameter	Symbol	Values			Unit	Remark
		Min.	Typ.	Max.		
Clock frequency	R_{xFCLK}	20	-	81	MHz	
Input data skew margin	T_{RSKM}	500	-	-	ps	
Clock high time	T_{LVCH}	-	$4/(7 * R_{xFCLK})$	-	ns	
Clock low time	T_{LVCL}	-	$3/(7 * R_{xFCLK})$	-	ns	

3.3.2. Input Clock and Data Timing Diagram

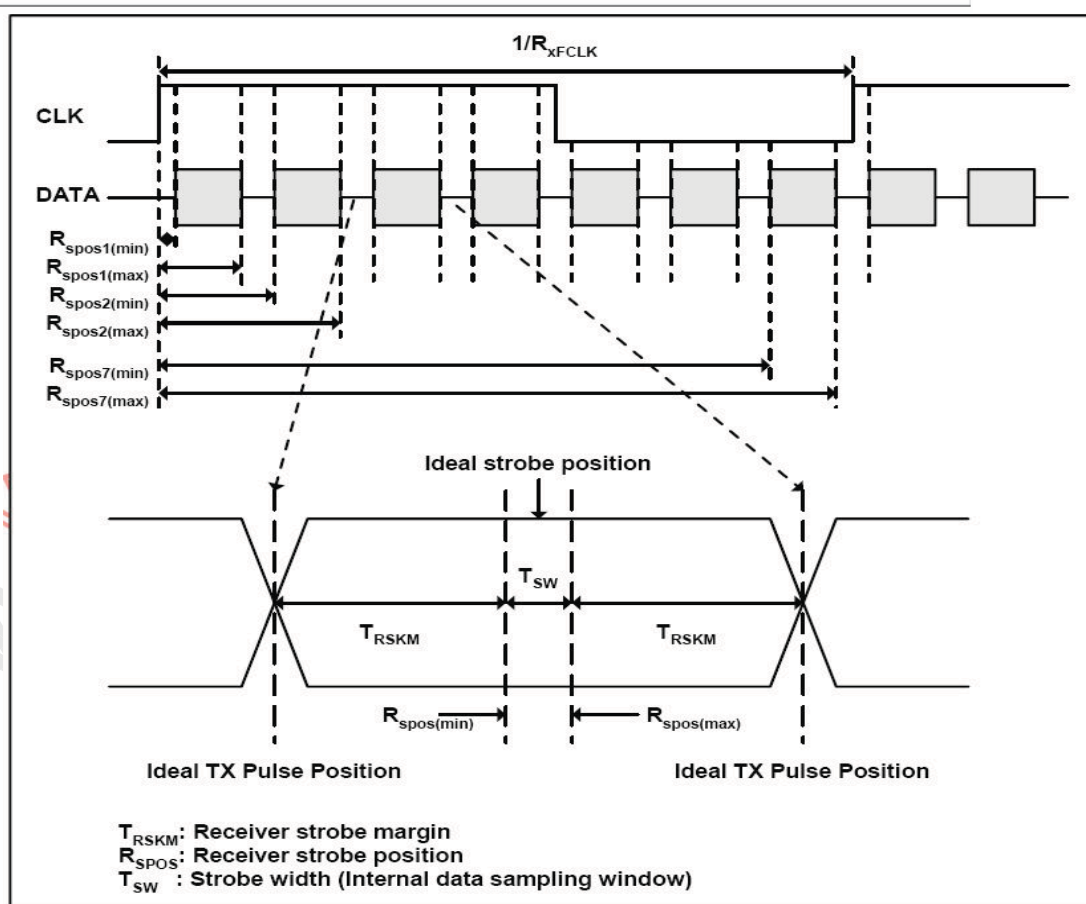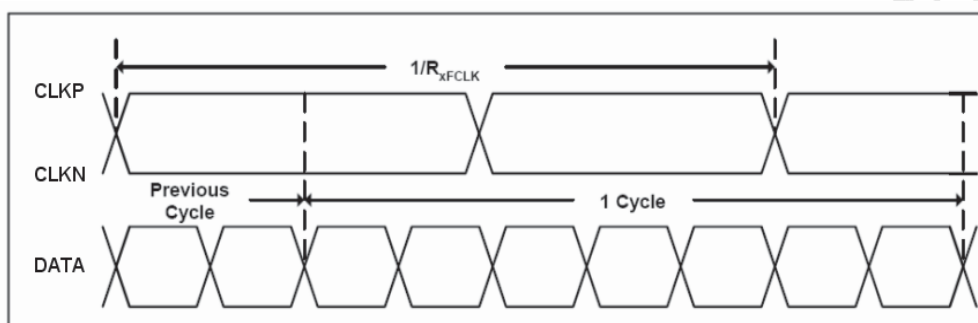

3.3.3. DC Electrical Characteristics

Parameter	Symbol	Values			Unit	Remark
		Min.	Typ.	Max.		
Differential input high Threshold voltage	RxVTH	-	-	+0.1	V	R _{xVCM} =1.2V
Differential input low Threshold voltage	RxVTL	-0.1	-	-	V	
Input voltage range (singled-end)	R _{xVIN}	0	-	2.4	V	
Differential input common mode voltage	R _{xVCM}	V _{ID} /2	-	2.4- V _{ID} /2	V	
Differential voltage	V _{ID}	0.25	-	0.6	V	
Differential input leakage current	RV _{xliz}	-10	-	+10	uA	

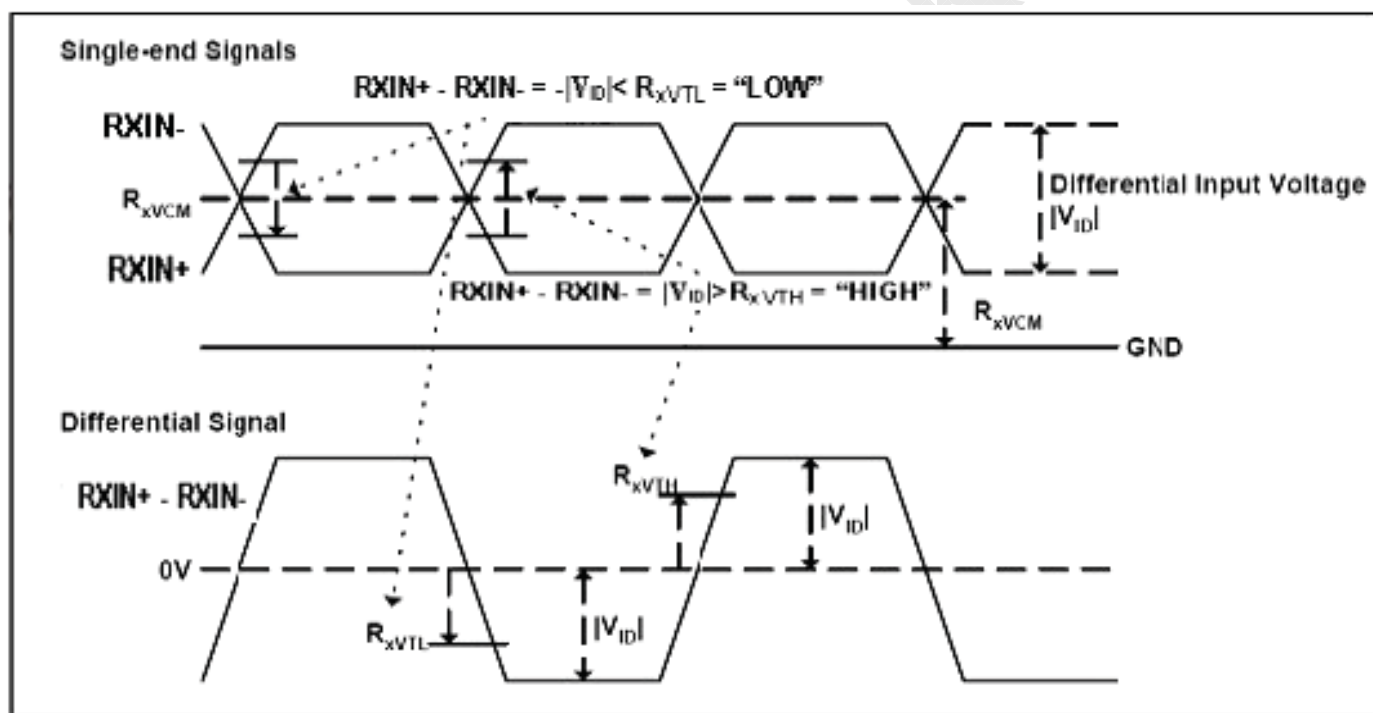



CHIMEI INNOLUX

Date :2013/08/27

Page:11/21

3.3.4. Timing

Item	Symbol	Values			Unit	Remark
		Min.	Typ.	Max.		
Clock Frequency	fclk	66.6	72.4	78.9	MHz	Frame rate =60Hz
Horizontal display area	thd	1280				
HS period time	th	1370	1440	1500	DCLK	
HS Blanking	thb	90	160	220	DCLK	
Vertical display area	tvd	800				
VS period time	tv	810	838	877	H	
VS Blanking	thb	10	38	77	H	


CHIMEI INNOLUX

Date :2013/08/27


Page:12/21

3.3.5. Data Input Format

6bit LVDS input

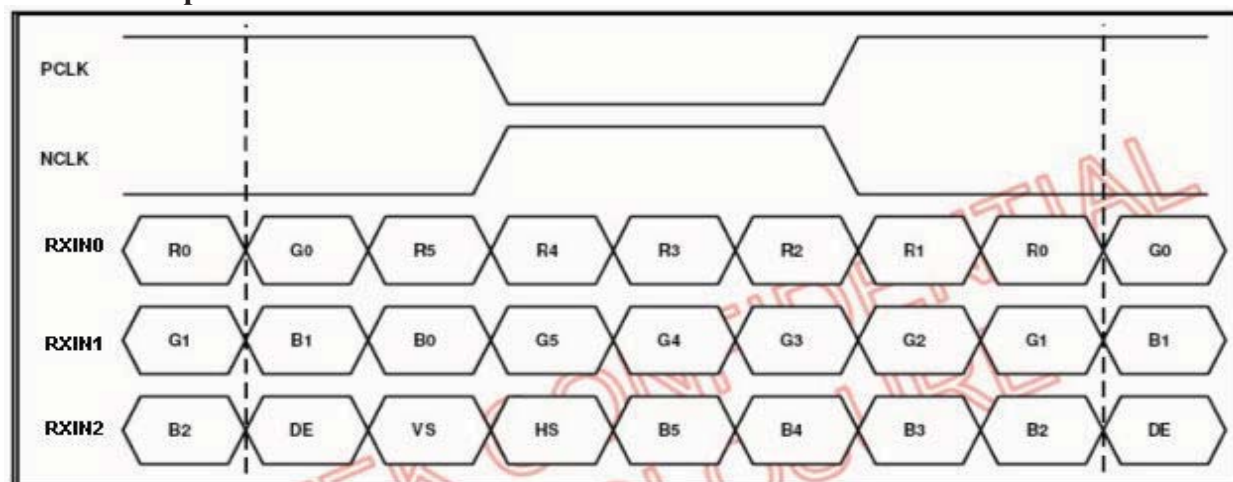

8bit LVDS input

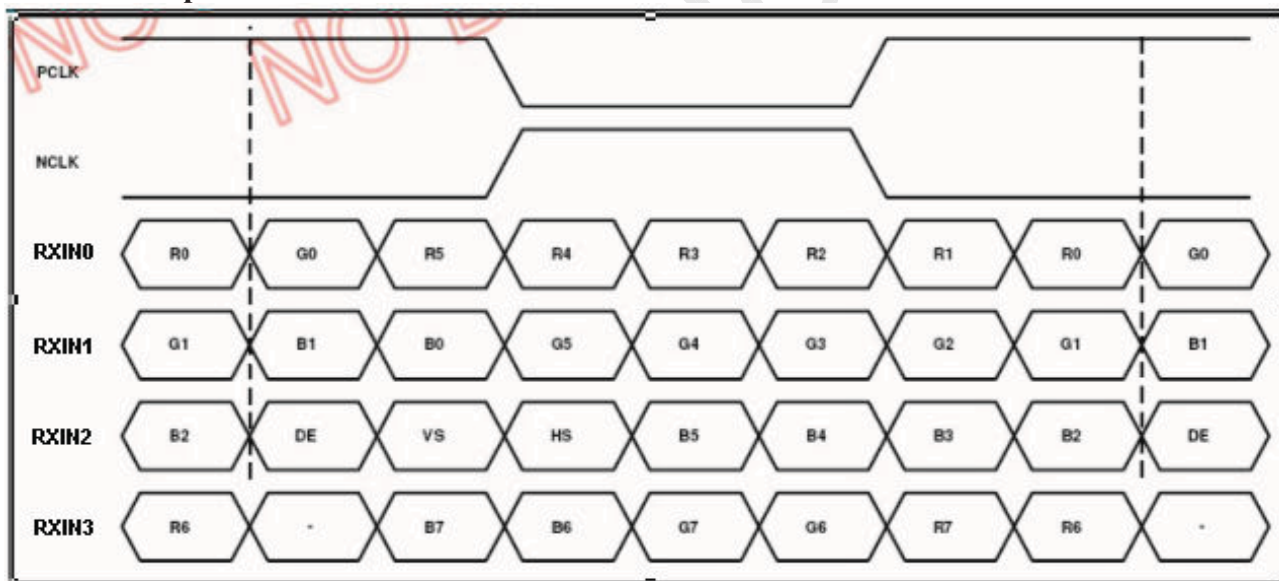

Note: Support DE timing mode only, SYNC mode not supported.

4. Optical Specifications

Note; Base on INNOLUX LCM

Item	Symbol	Condition	Values			Unit	Remark
			Min.	Typ.	Max.		
Viewing angle (CR≥ 10)	θ_L	$\Phi=180^\circ$ (9 o'clock)	60	70	-	degree	Note 1
	θ_R	$\Phi=0^\circ$ (3 o'clock)	60	70	-		
	θ_T	$\Phi=90^\circ$ (12 o'clock)	60	70	-		
	θ_B	$\Phi=270^\circ$ (6 o'clock)	40	50	-		
Response time	T_{ON}	Normal $\theta=\Phi=0^\circ$	-	10	20	msec	Note 3
	T_{OFF}		-	15	30	msec	Note 3
Contrast ratio	CR		500	700	-	-	Note 4
Color chromaticity	W_X		0.26	0.31	0.36	-	Note 2
	W_Y		0.28	0.33	0.38	-	Note 5 Note 6
Transmittance	Tr		2.89	3.39	-	%	

Test Conditions:

1. $V_{DD}=3.3V$, the ambient temperature is $25^\circ C$.
2. The test systems refer to Note 2.

Note 1: Definition of viewing angle range

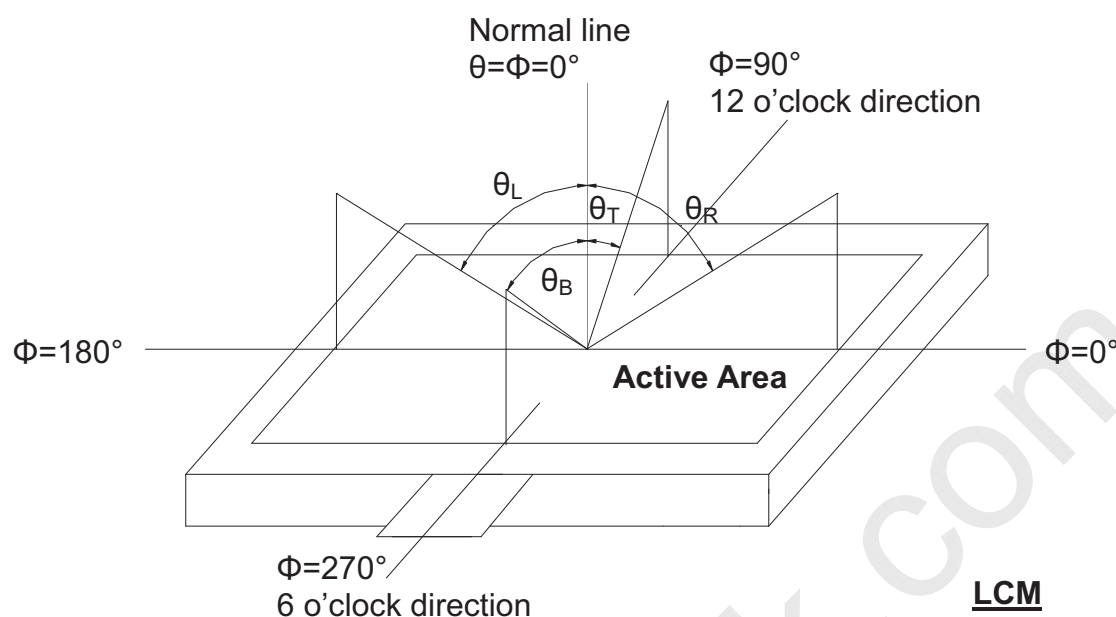


Fig. 4-1 Definition of viewing angle

Note 2: Definition of optical measurement system.

The optical characteristics should be measured in dark room. After 30 minutes operation, the optical properties are measured at the center point of the LCD screen. (Response time is measured by Photo detector TOPCON BM-7, other items are measured by BM-5A/Field of view: 1° /Height: 500mm.)

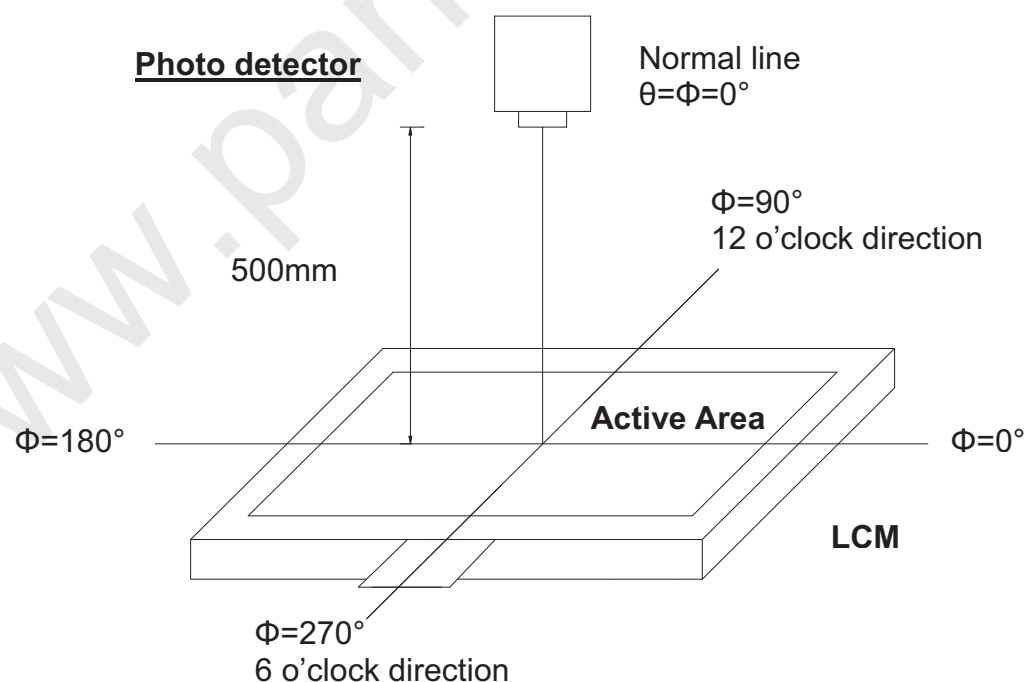


Fig. 4-2 Optical measurement system setup

Note 3: Definition of Response time

The response time is defined as the LCD optical switching time interval between "White" state and "Black" state. Rise time (T_{ON}) is the time between photo detector output intensity changed from 90% to 10%. And fall time (T_{OFF}) is the time between photo detector output intensity changed from 10% to 90%.

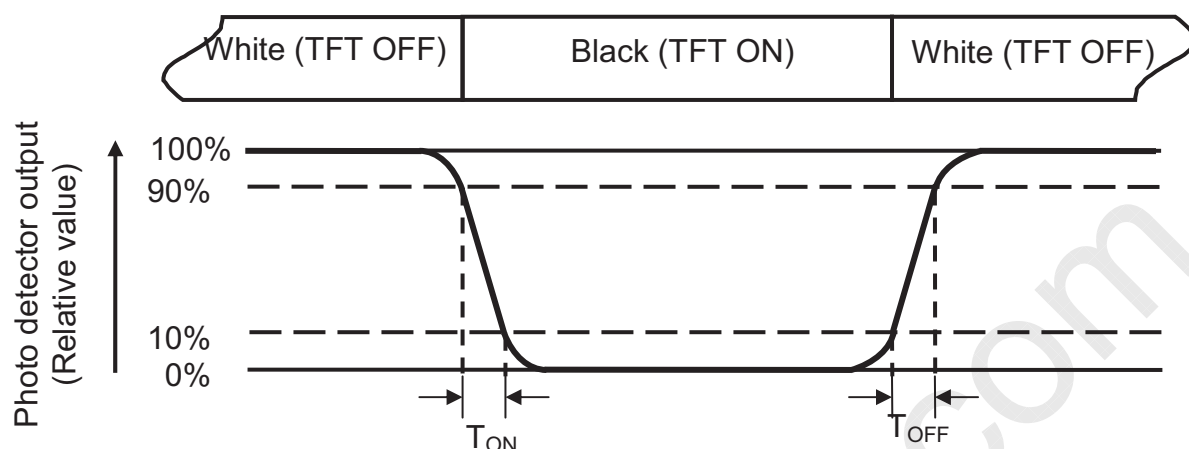


Fig. 4-3 Definition of response time

Note 4: Definition of contrast ratio

$$\text{Contrast ratio (CR)} = \frac{\text{Luminance measured when LCD on the "White" state}}{\text{Luminance measured when LCD on the "Black" state}}$$

Note 5: Definition of color chromaticity (CIE1931)

Color coordinates measured at center point of LCD.

Note 6: All input terminals LCD panel must be ground while measuring the center area of the panel.

5. Reliability Test Items

(Note3)

Item	Test Conditions		Remark
High Temperature Storage	Ta = 60℃	120hrs	Note 1, Note 4
Low Temperature Storage	Ta = -20℃	120hrs	Note 1, Note 4
High Temperature Operation	Ts = 50℃	120hrs	Note 2, Note 4
Low Temperature Operation	Ta = -10℃	120hrs	Note 1, Note 4
Operate at High Temperature and Humidity	+40℃, 90%RH	120hrs	Note 4
Thermal Shock	-10℃/30 min ~ +50℃/30 min for a total 100 cycles, Start with cold temperature and end with high temperature.		Note 4

Note 1: Ta is the ambient temperature of samples.

Note 2: Ts is the temperature of panel's surface.

Note 3: In the standard condition, there shall be no practical problem that may affect the display function. After the reliability test, the product only guarantees operation, but don't guarantee all of the cosmetic specification.

Note 4: Before cosmetic and function test, the product must have enough recovery time, at least 2 hours at room temperature.



6. General Precautions

6.1. Safety

Liquid crystal is poisonous. Do not put it in your mouth. If liquid crystal touches your skin or clothes, wash it off immediately by using soap and water.

6.2. Handling

1. The LCD panel is plate glass. Do not subject the panel to mechanical shock or to excessive force on its surface.
2. The polarizer attached to the display is easily damaged. Please handle it carefully to avoid scratch or other damages.
3. To avoid contamination on the display surface, do not touch the module surface with bare hands.
4. Keep a space so that the LCD panels do not touch other components.
5. Put cover board such as acrylic board on the surface of LCD panel to protect panel from damages.
6. Transparent electrodes may be disconnected if you use the LCD panel under environmental conditions where the condensation of dew occurs.
7. Do not leave module in direct sunlight to avoid malfunction of the ICs.

6.3. Static Electricity

1. Be sure to ground module before turning on power or operating module.
2. Do not apply voltage which exceeds the absolute maximum rating value.

6.4. Storage

1. Store the module in a dark room where must keep at $25\pm 10^{\circ}\text{C}$ and 65%RH or less.
2. Do not store the module in surroundings containing organic solvent or corrosive gas.
3. Store the module in an anti-electrostatic container or bag.

6.5. Cleaning

1. Do not wipe the polarizer with dry cloth. It might cause scratch.
2. Only use a soft sloth with IPA to wipe the polarizer, other chemicals might permanent damage to the polarizer.



CHIMEI INNOLUX

Date :2013/08/27 Page:19/21

8. Package Drawing

8.1. Packaging Material Table

No.	Item	Model (Material)	Dimensions(mm)	Unit Weight (kg)	Quantity	Remark
1	LCM Module	ZE090NA-01B	201.46 × 130.66 × 1.43	0.0835	44pcs	
2	Tray	PET	505 × 338 × 16	0.22	23pcs	
3	Vacuum	PET	372 × 905	0.176	1pcs	
4	Partition	Corrugated paper	512 × 1154	0.3	1pcs	
5	Carton	Corrugated paper	530 × 355 × 255	0.82	1pcs	
6	Total weight	10.03Kg±5%				

8.2. Packaging Quantity

Total LCM quantity in Carton: 2 pcs/tray × 22 trays = 44pcs


CHIMEI INNOLUX

Date :2013/08/27

Page:20/21


8.3. Packaging Drawing

Step A.




Put products into the trays.
The top surface of product is face to us.
There are 2 pcs modules in one tray.

Step B.

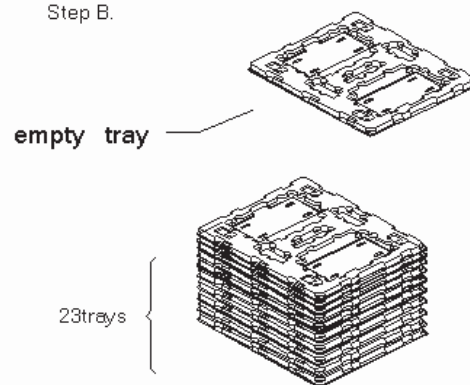


There are total 44modules in 22 trays.
Top tray(the 23 tray) is empty
Notes:
Every second tray turn 180 degrees to stack up.
The top tray is empty.

Step C.

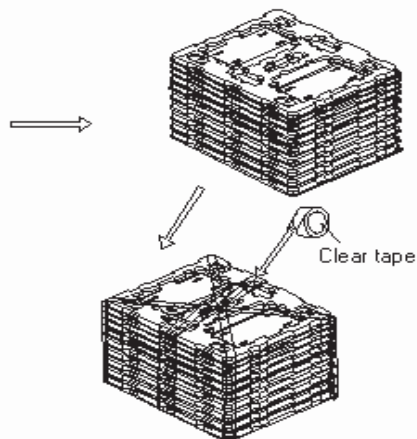


Step D.



Put trays into Vacuum Bag.
Seal the Vacuum Bag.


Notes:
Air leakage can't allowed after vacuum packaging

Step E.

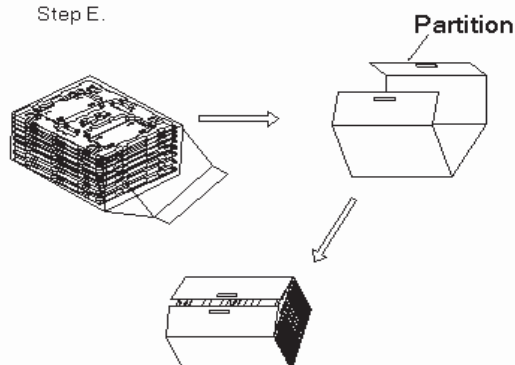

Put it into the Partition

Step F.

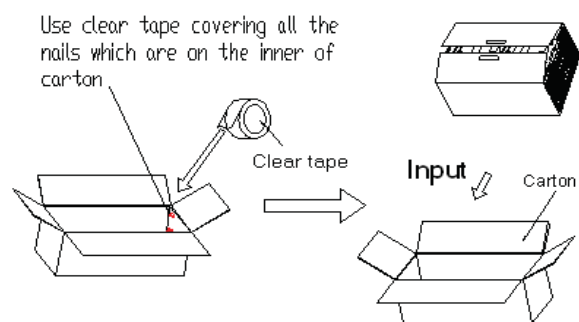

Put it into the Carton.

Step G.



Seal the Carton.

Step H.



Paste the label on Carton

Step I.



Put the 30 loaded packages on a pallet.
There are 6 packages on a storey, 5 stores on a
pallet.