

**PROPRIETARY NOTE**

THIS SPECIFICATION IS THE PROPERTY OF BOE DT AND SHALL NOT BE REPRODUCED OR COPIED WITHOUT THE WRITTEN PERMISSION OF BOE DT AND MUST BE RETURNED TO BOE DT UPON ITS REQUEST

TITLE : ZV190E0M-N10

Product Specification

Rev.A

BEIJING BOE Display TECHNOLOGY CO. LTD

SPEC. NUMBER

PRODUCT GROUP

Rev.A

ISSUE DATE

PAGE

S

TFT-LCD

2019.08.2

1 OF 30

BOE**PRODUCT GROUP**

REV

ISSUE DATE

TFT- LCD PRODUCT

Ver.A

2019.08.02

Contents

No.	Item	Page
1.0	General Description	4
2.0	Absolute Maximum Ratings	6
3.0	Electrical Specifications	7
4.0	Optical Specifications	9
5.0	Interface Connection	11
6.0	Signal Timing Specifications	14
7.0	Signal Timing Waveforms of Interface Signal	16
8.0	Input Signals, Display Colors & Gray Scale of Colors	18
9.0	Power Sequence	19
10.0	Mechanical Characteristics	21
11.0	Reliability Test	22
12.0	Handling& Cautions	23
13.0	Product Serial Number	25
14.0	Packing	26
15.0	Appendix	28

SPEC. NUMBER

SPEC. TITLE

PAGE

S

B4 ZV190E0M-N10 Product Specification Rev.A

3 OF 30

DAS-RD-2019015-O

A4(210 X 297)

BOE**PRODUCT GROUP**

REV

ISSUE DATE

TFT- LCD PRODUCT


Ver.A

2019.08.02

1.0 GENERAL DESCRIPTION

1.1 Introduction

ZV190E0M-N10 is a color active matrix TFT LCD module using amorphous silicon TFT's (Thin Film Transistors) as an active switching devices. This module has a 19 inch diagonally measured active area with SXGA resolutions (1280 horizontal by 1024 vertical pixel array). Each pixel is divided into RED, GREEN, BLUE dots which are arranged in vertical stripe and this module can display 16.7M colors. The TFT-LCD panel used for this module is adapted for a low reflection and higher color type.

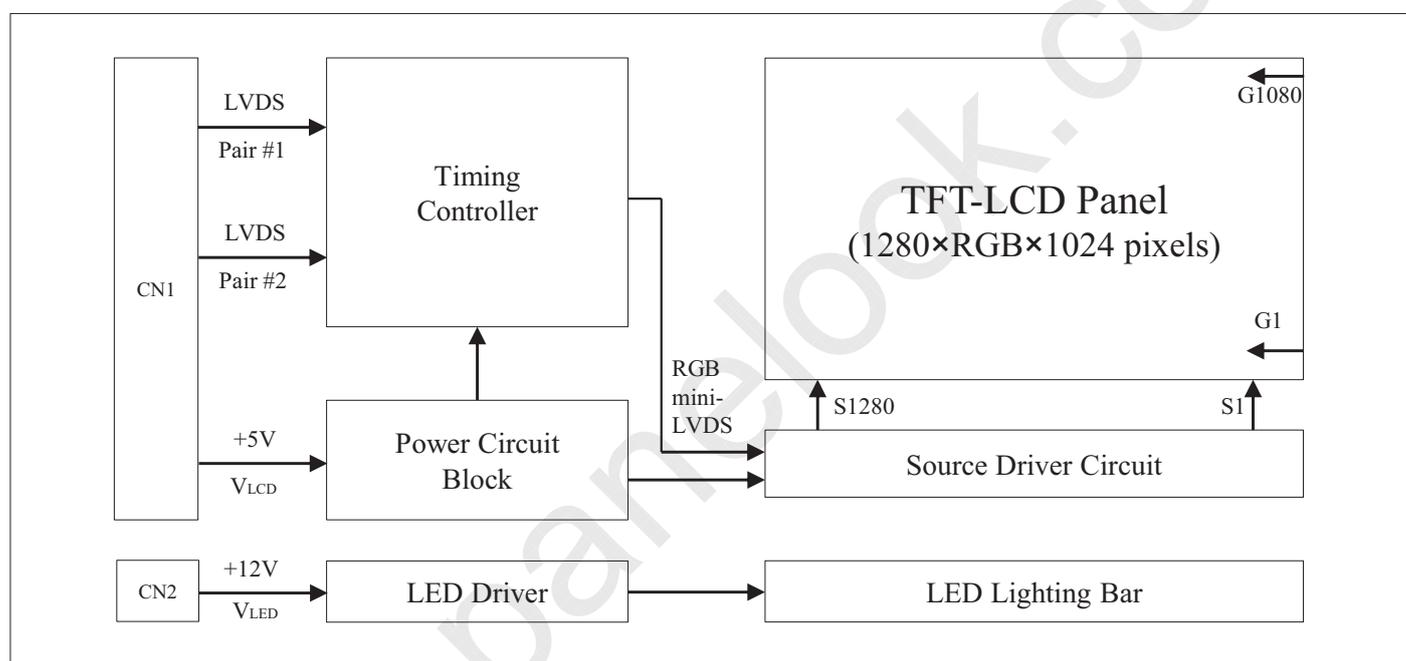

1.2 Features

- LVDS Interface with 2 pixel / clock
- High-speed response
- 6-bit (Hi-FRC) color depth, display 16.7M colors
- High luminance and contrast ratio, low reflection and wide viewing angle
- DE (Data Enable) only
- RoHS/Halogen Free (except connector)
- Gamma Correction
- Reverse type

SPEC. NUMBER

S

SPEC. TITLE

B4 ZV190E0M-N10 Product Specification Rev.A

PAGE

4 OF 30

BOE**PRODUCT GROUP**

REV

ISSUE DATE

TFT- LCD PRODUCT

Ver.A

2019.08.02

1.3 Application

- Desktop Type of PC & Workstation Use
- Slim-Size Display for Stand-alone Monitor
- Display Terminals for Control System
- Monitors for Process Controller

1.4 General Specification

The followings are general specifications at the model ZV190E0M-N10.

<Table 1. General Specifications>

Parameter	Specification	Unit	Remarks
Active area	374.784(H) × 299.8272(V)	mm	
Number of pixels	1280(H) × 1024(V)	pixels	
Pixel pitch	0.20976 (H) × 0.2928(V)	mm	
Pixel arrangement	RGB Vertical stripe		
Display colors	16.7M	colors	
Display mode	Normally Black		
Dimensional outline	396(H) x 324(V) x9.9(D) typ.	mm	Detail refer to drawing
Weight	1695	g	
Bezel width (L/R/U/D)	8.6/8.6/10.5/10.5	mm	
NTSC	Min 83%		CIE1931
Back-light	Horizontal arranged, 1-LED Lighting Bar type		

SPEC. NUMBER

SPEC. TITLE

PAGE

S

B4 ZV190E0M-N10 Product Specification Rev.A

5 OF 30

BOE**PRODUCT GROUP**

REV

ISSUE DATE

TFT- LCD PRODUCT

Ver.A

2019.08.02

2.0 ABSOLUTE MAXIMUM RATINGS

The followings are maximum values which, if exceed, may cause faulty operation or damage to the unit. The operational and non-operational maximum voltage and current values are listed in Table 2.

< Table 2. Absolute Maximum Ratings >

[VSS=GND=0V]

Parameter	Symbol	Min.	Max.	Unit	Remarks
Power Supply Voltage	V_{LCD}	-0.3	6.0	V	Ta = 25 °C
Power Supply Voltage	V_{LED}	-0.3	33	V	
Operating Temperature	T_{OP}	-20	+70	°C	1)
Storage Temperature	T_{ST}	-20	+75	°C	1)

Note : 1) Temperature and relative humidity range are shown in the figure below.

Wet bulb temperature should be 39 °C max. and no condensation of water.

SPEC. NUMBER

S

SPEC. TITLE

B4 ZV190E0M-N10 Product Specification Rev.A

PAGE

6 OF 30

BOE**PRODUCT GROUP**

REV

ISSUE DATE

TFT- LCD PRODUCT

Ver.A

2019.08.02

3.0 ELECTRICAL SPECIFICATIONS**3.1 Electrical Specifications**

< Table 3. Electrical specifications >

[Ta =25 ± 2 °C]

Parameter.		Min.	Typ.	Max.	Unit	Remarks
Power Supply Voltage	V_{LCD}	4.5	5.0	5.5	V	Note1
Power Supply Current	I_{LCD}	-	600	1100	mA	
In-Rush Current	I_{RUSH}	-	2.0	3.0	A	Note 2
Permissible Input Ripple Voltage	V_{RF}	-	-	300	mV	Note1,3
High Level Differential Input Threshold Voltage	V_{IH}	-	-	+100	mV	
Low Level Differential Input Threshold Voltage	V_{IL}	-100	-	-	mV	
Differential input voltage	$ V_{ID} $	200	-	600	mV	
Differential input common mode voltage	V_{cm}	1.0	1.2	1.5		$V_{IH}=100mV$, $V_{IL}=-100mV$
Power Consumption	P_{LCD}	-	3.0	5.5	W	
	P_{LED}	-	-	19	W	Note 4
	P_{total}	-	-	24.5	W	

Notes : 1. The supply voltage is measured and specified at the interface connector of LCM.

The current draw and power consumption specified is for VDD=5.0V, Frame rate=75Hz

Clock frequency = 54 MHz. Test Pattern of power supply current



a) Typ : Color Test



b) Max : Vertical SubLine 255

- Duration of rush current is about 2 ms and rising time of VDD is $520 \mu s \pm 20 \%$
- Ripple Voltage should be covered by Input voltage Spec.
- Calculated value for reference (Input pins*VPIN × IPIN) including inverter loss.

SPEC. NUMBER

S

SPEC. TITLE

B4 ZV190E0M-N10 Product Specification Rev.A

PAGE

7 OF 30

BOE**PRODUCT GROUP**

REV

ISSUE DATE

TFT- LCD PRODUCT

Ver.A

2019.08.02

3.2 Backlight Unit

< Table 4. LED Backlight Unit >

Parameter		Min.	Typ.	Max.	Unit	Remarks
LED Forward Voltage	V_F	-	3.1	3.3	V	-
LED Forward Current	I_F	-	110	-	mA	-
LED Life-Time	N/A	50,000	-	-	Hour	$I_F = 110\text{mA}$
Power supply voltage for LED Driver	V_{LED}	10.8	12	13.2	V	
Power Supply Current for LED Driver	I_{LED}	-	TBD	1760	mA	
Power Consumption	P_{LED}	-	TBD	19	W	
EN Control Level	Backlight on	3.0	3.3	5.0	V	
	Backlight off	0		0.8	V	
PWM Control Level	PWM High Level	3.0	3.3	5.0	V	
	PWM Low Level	0		0.8	V	
PWM Control Frequency	F_{PWM}	200	-	20K	Hz	
Duty Ratio	-	5	-	100	%	

LED bar consists of 44LED packages,4strings(parallel)*11packages(serial)

Note1: There are one light bar ,and the specified current is input LED chip 100% duty current

Note2: The sense current of each input pin is 110mA

Note3: The lifetime is determined as the time at which luminance of LED become 50% of the initial brightness or not normal lighting at $I_{PIN}=110\text{mA}$ on condition of continuous operating at $25 \pm 2^\circ\text{C}$

SPEC. NUMBER

S

SPEC. TITLE

B4 ZV190E0M-N10 Product Specification Rev.A

PAGE

8 OF 30

BOE**PRODUCT GROUP**

REV

ISSUE DATE

TFT- LCD PRODUCT

Ver.A

2019.08.02

4.0 OPTICAL SPECIFICATION**4.1 Overview**

The test of Optical specifications shall be measured in a dark room (ambient luminance ≤ 1 lux and temperature = $25 \pm 2^\circ\text{C}$) with the equipment of Luminance meter system (Goniometer system and TOPCONE PR730) and test unit shall be located at an approximate distance 50cm from the LCD surface at a viewing angle of θ and Φ equal to 0° . We refer to $\theta_{0=0}$ ($=\theta_3$) as the 3 o'clock direction (the "right"), $\theta_{0=90}$ ($=\theta_{12}$) as the 12 o'clock direction ("upward"), $\theta_{0=180}$ ($=\theta_9$) as the 9 o'clock direction ("left") and $\theta_{0=270}$ ($=\theta_6$) as the 6 o'clock direction ("bottom"). While scanning θ and/or Φ , the center of the measuring spot on the Display surface shall stay fixed. The measurement shall be executed after 30 minutes warm-up period. VDD shall be 5.0V +/-10% at 25°C . Optimum viewing angle direction is 6 'clock.

4.2 Optical Specifications

[VDD = 5.0V, Frame rate = 60Hz, Clock = 74.25MHz, $I_{BL} = 210\text{mA}$, $T_a = 25 \pm 2^\circ\text{C}$]

Parameter		Symbol	Condition	Min.	Typ.	Max.	Unit	Remark
Viewing Angle range	Horizontal	Θ_3	CR > 10	85	89	-	Deg.	Note 1
		Θ_9		85	89	-	Deg.	
	Vertical	Θ_{12}		85	89	-	Deg.	
		Θ_6		85	89	-	Deg.	
Luminance Contrast ratio		CR		700	1000			Note 2
Luminance of White		Y_w		360	450		cd/m ²	Note 3
White luminance uniformity		ΔY		75	-		%	Note 4
Reproduction of color	White	W_x	$\Theta = 0^\circ$ (Center) Normal Viewing Angle	0.283	0.313	0.343	-	Note 5
		W_y		0.299	0.329	0.359	-	
	Red	R_x		0.602	0.652	0.702	-	
		R_y		0.286	0.336	0.389	-	
	Green	G_x		0.229	0.279	0.329	-	
		G_y		0.595	0.645	0.695	-	
	Blue	B_x		0.088	0.138	0.188	-	
		B_y		0.007	0.047	0.147	-	
Response Time	GTG	T_g		14	20	ms	Note 6	

SPEC. NUMBER

S

SPEC. TITLE

B4 ZV190E0M-N10 Product Specification Rev.A

PAGE

9 OF 30

DAS-RD-2019015-O

A4(210 X 297)

BOE**PRODUCT GROUP**

REV

ISSUE DATE

TFT- LCD PRODUCT

Ver.A

2019.08.02

Note :

- Viewing angle is the angle at which the contrast ratio is greater than 10. The viewing are determined for the horizontal or 3, 9 o'clock direction and the vertical or 6, 12 o'clock direction with respect to the optical axis which is normal to the LCD surface.
- Contrast measurements shall be made at viewing angle of $\theta = 0^\circ$ and at the center of the LCD surface. Luminance shall be measured with all pixels in the view field set first to white, then to the dark (black) state. (See FIGURE 1 shown in Appendix) Luminance Contrast Ratio (CR) is defined mathematically.

$$CR = \frac{\text{Luminance when displaying a white raster}}{\text{Luminance when displaying a black raster}}$$

- Center Luminance of white is defined as the LCD surface. Luminance shall be measured with all pixels in the view field set first to white. This measurement shall be taken at the locations shown in FIGURE 2 for a total of the measurements per display.
- The White luminance uniformity on LCD surface is then expressed as :

$$\Delta Y = (\text{Minimum Luminance of 9points} / \text{Maximum Luminance of 9points}) * 100$$
 (See FIGURE 2 shown in Appendix).
- The color chromaticity coordinates specified in Table 4. shall be calculated from the spectral data measured with all pixels first in red, green, blue and white. Measurements shall be made at the center of the panel.
- Response time Tg is the average time required for display transition by switching the input signal as below table and is based on Frame rate fV =60Hz to optimize.
Each time in below table is defined as Figure 3and shall be measured by switching the input signal for "any level of gray(bright)"and "any level of gray(dark)".

SPEC. NUMBER

S

SPEC. TITLE

B4 ZV190E0M-N10 Product Specification Rev.A

PAGE

10 OF 30

BOE**PRODUCT GROUP**

REV

ISSUE DATE

TFT- LCD PRODUCT

Ver.A


2019.08.02

5.0 INTERFACE CONNECTION.**5.1 Electrical Interface Connection****5.1.1 LED Driver**

-LED connector: SM08B-GHH-TB (JST) or EQUIVALENT

< Table 1. LED Light Bar >

Pin No	Symbol	Description
1	VLED	Power 12V input
2	VLED	Power 12V input
3	VLED	Power 12V input
4	GND	ground
5	GND	ground
6	GND	ground
7	ON/OFF	H:ON , L:OFF
8	Dimming	PWM

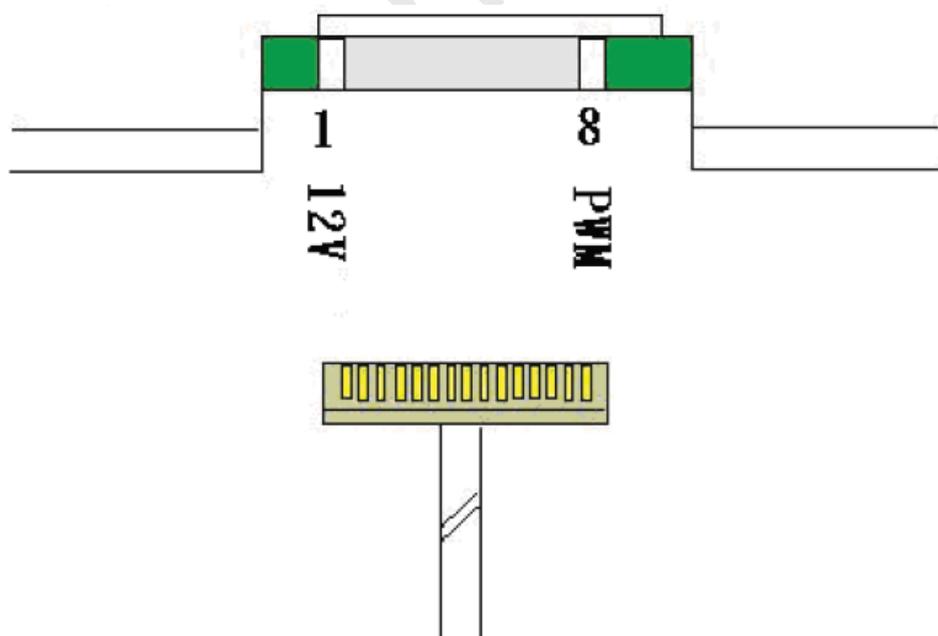

SPEC. NUMBER

S

SPEC. TITLE

B4 ZV190E0M-N10 Product Specification Rev.A

PAGE

11 OF 30

BOE**PRODUCT GROUP**

REV

ISSUE DATE

TFT- LCD PRODUCT

Ver.A

2019.08.02

5.0 INTERFACE CONNECTION.**5.1 Electrical Interface Connection**

- CN1 Module Side Connector : Hirose DF14H-30P-1.25H(56) or Equivalent
User Side Connector : DF14-30S-1.25C or Equivalent

Pin No	Symbol	Function	Remark
1	RXO0-	Negative Transmission data of Pixel 0 (ODD)	
2	RXO0+	Positive Transmission data of Pixel 0 (ODD)	
3	RXO1-	Negative Transmission data of Pixel 1 (ODD)	
4	RXO1+	Positive Transmission data of Pixel 1 (ODD)	
5	RXO2-	Negative Transmission data of Pixel 2 (ODD)	
6	RXO2+	Positive Transmission data of Pixel 2 (ODD)	
7	GND	Power Ground	
8	RXOC-	Negative Transmission Clock (ODD)	
9	RXOC+	Positive Transmission Clock (ODD)	
10	RXO3-	Negative Transmission data of Pixel 3 (ODD)	
11	RXO3+	Positive Transmission data of Pixel 3 (ODD)	
12	RXE0-	Negative Transmission data of Pixel 0 (EVEN)	
13	RXE0+	Positive Transmission data of Pixel 0 (EVEN)	
14	GND	Power Ground	
15	RXE1-	Negative Transmission data of Pixel 1 (EVEN)	
16	RXE1+	Positive Transmission data of Pixel 1 (EVEN)	
17	GND	Power Ground	
18	RXE2-	Negative Transmission data of Pixel 2 (EVEN)	
19	RXE2+	Positive Transmission data of Pixel 2 (EVEN)	
20	RXEC-	Negative Transmission Clock (EVEN)	
21	RXEC+	Positive Transmission Clock (EVEN)	
22	RXE3-	Negative Transmission data of Pixel 3 (EVEN)	
23	RXE3+	Positive Transmission data of Pixel 3 (EVEN)	
24	GND	Power Ground	Note
25	GND	Power Ground	
26	GND	Power Ground	
27	GND	Power Ground	
28	VDD	Power Supply: +5V	
29	VDD		
30	VDD		

Note 1: This pin should be connected with GND.

SPEC. NUMBER

S

SPEC. TITLE

B4 ZV190E0M-N10 Product Specification Rev.A

PAGE

12 OF 30

DAS-RD-2019015-O

A4(210 X 297)

BOE**PRODUCT GROUP**

REV

ISSUE DATE

TFT- LCD PRODUCT

Ver.A

2019.08.02

5.2 LVDS Interface (Tx; THC63LVDF83A or Equivalent)**5.2.1 LVDS Interface**

	Input Signal	Transmitter		Interface		HT236F01-100 (CN11)	Remark
		Pin No.	Pin No.	System (Tx)	TFT-LCD (Rx)	Pin No.	
LVDS	OR0	51	48 47	OUT0- OUT0+	RXO0- RXO0+	1	
	OR1	52					
	OR2	54					
	OR3	55					
	OR4	56					
	OR5	3					
	OG0	4	46 45	OUT1- OUT1+	RXO1- RXO1+	3	
	OG1	6					
	OG2	7					
	OG3	11					
	OG4	12					
	OG5	14					
	OB0	15	42 41	OUT2- OUT2+	RXO2- RXO2+	5	
	OB1	19					
	OB2	20					
	OB3	22					
	OB4	23					
	OB5	24					
	Hsync	27	40 39	CLK OUT- CLK OUT+	RXO CLK- RXO CLK+	8	
	Vsync	28					
	DE	30	38 37	OUT3- OUT3+	RXO3- RXO3+	10	
	MCLK	31					
	OR6	50	16	18	25	11	
	OR7	2					
OG6	8	16	18	25	11		
OG7	10						
OB6	16	18	25	25	11		
OB7	18						
RSVD	25						

Note: The order of even data is same with odd data.

SPEC. NUMBER

SPEC. TITLE

PAGE

S

B4 ZV190E0M-N10 Product Specification Rev.A

13 OF 30

DAS-RD-2019015-O

A4(210 X 297)

BOE**PRODUCT GROUP**

REV

ISSUE DATE

TFT- LCD PRODUCT

Ver.A

2019.08.02

6.0 SIGNAL TIMING SPECIFICATION

6.1 The ZV190E0M-N10 is operated by the DE only.

Item	Symbols		Min	Typ	Max	Unit	Note
DCLK	Period	tCLK	14.81	18.52	22.22	ns	
	Frequency	-	40	54	67.5	MHz	
Hsync	Period	tHP	704	844	960	tCLK	
	Horizontal Valid	tHV	640	640	640	tCLK	
	Horizontal Blank	tHB	64	204	320	tCLK	
	Frequency	fH	53.3	63.96	80	KHz	
Vsync	Period	tVP	1036	1066	1150	tHP	
	Vertical Valid	tVV	1024	1024	1024	tHP	
	Vertical Blank	tVB	12	42	72	tHP	
	Frequency	fV	50	60	75	Hz	
LVDS Receiver clock	Input spread spectrum ratio	SSr	-3	-	+3	%	

Note: The DCLK range at last line of V-blanking should be set in 0-H-active/2.

SPEC. NUMBER

S

SPEC. TITLE

B4 ZV190E0M-N10 Product Specification Rev.A

PAGE

14 OF 30

BOE**PRODUCT GROUP**

REV

ISSUE DATE

TFT- LCD PRODUCT

Ver.A


2019.08.02

6.2 LVDS Rx Interface Timing Parameter

The specification of the LVDS Rx interface timing parameter is shown in Table 4.

<Table 4. LVDS Rx Interface Timing Specification>

Item	Symbol	Min	Typ	Max	Unit	Remark
CLKIN Period	tRCIP	14.81	18.52	22.22	nsec	
Input Data 0	tRIP1	-0.4	0.0	+0.4	nsec	
Input Data 1	tRIP0	tRCIP/7-0.4	tRCIP/7	tRCIP/7+0.4	nsec	
Input Data 2	tRIP6	2 × tRCIP/7-0.4	2 × tRCIP/7	2 × tRCIP/7+0.4	nsec	
Input Data 3	tRIP5	3 × tRCIP/7-0.4	3 × tRCIP/7	3 × tRCIP/7+0.4	nsec	
Input Data 4	tRIP4	4 × tRCIP/7-0.4	4 × tRCIP/7	4 × tRCIP/7+0.4	nsec	
Input Data 5	tRIP3	5 × tRCIP/7-0.4	5 × tRCIP/7	5 × tRCIP/7+0.4	nsec	
Input Data 6	tRIP2	6 × tRCIP/7-0.4	6 × tRCIP/7	6 × tRCIP/7+0.4	nsec	

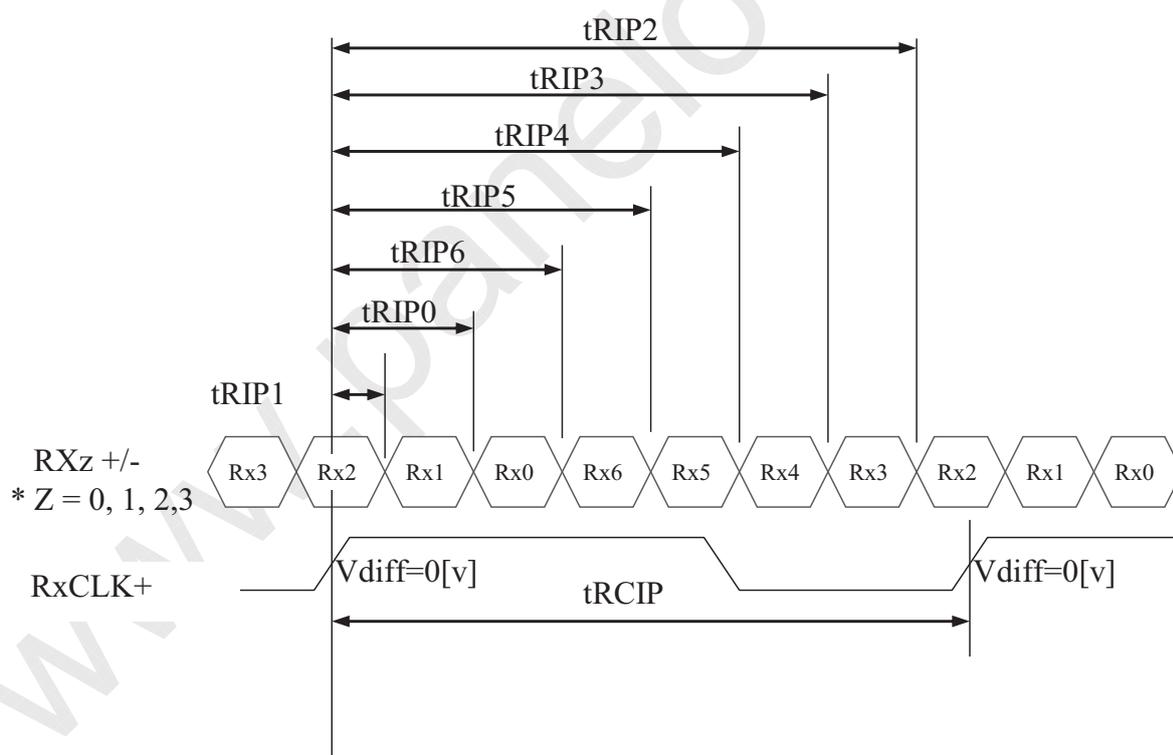

* Vdiff = (RXz+)-(RXz-),..., (RXCLK+)-(RXCLK-)

SPEC. NUMBER

S

SPEC. TITLE

B4 ZV190E0M-N10 Product Specification Rev.A

PAGE

15 OF 30

DAS-RD-2019015-O

A4(210 X 297)



PRODUCT GROUP

REV

ISSUE DATE


TFT- LCD PRODUCT

Ver.A

2019.08.02


7.0 SIGNAL TIMING WAVEFORMS OF INTERFACE SIGNAL

7.1 Sync Timing Waveforms

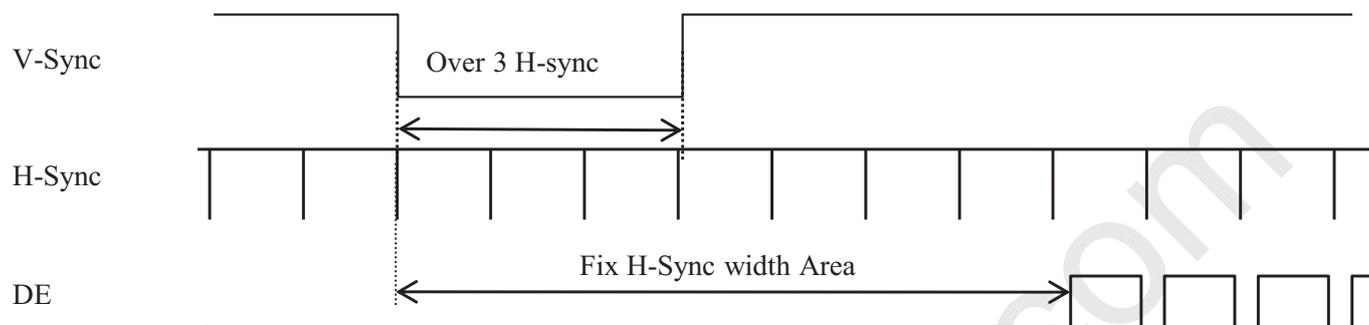

- 1) Need over 3 H-sync during V-Sync Low
- 2) Fix H-Sync width from V-Sync falling edge to first rising edge

7.2 Vertical Timing Waveforms

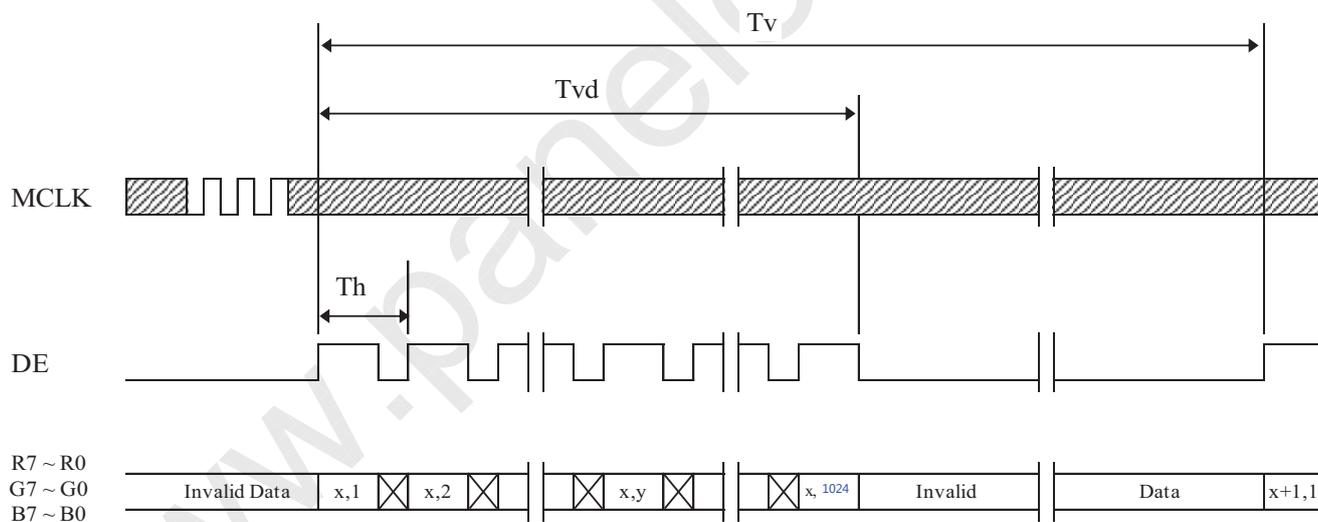

SPEC. NUMBER

SPEC. TITLE

PAGE

S

B4 ZV190E0M-N10 Product Specification Rev.A

16 OF 30



PRODUCT GROUP

REV



ISSUE DATE

TFT- LCD PRODUCT

Ver.A

2019.08.02

7.3 Horizontal Timing Waveforms

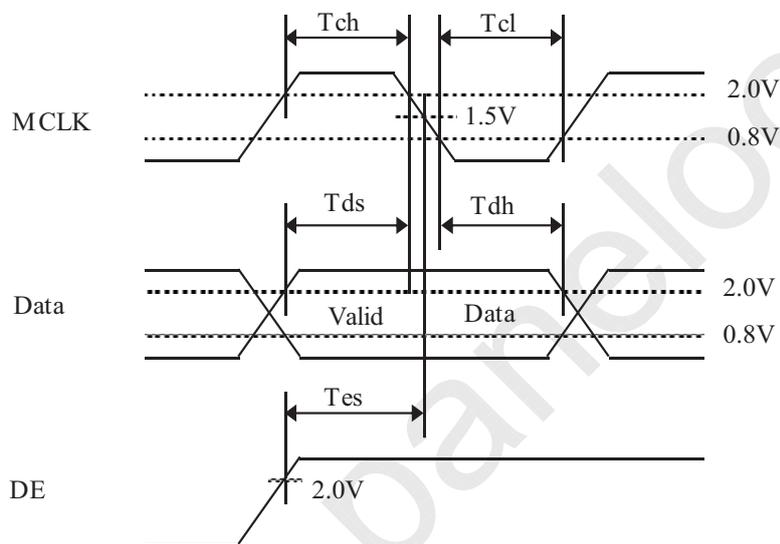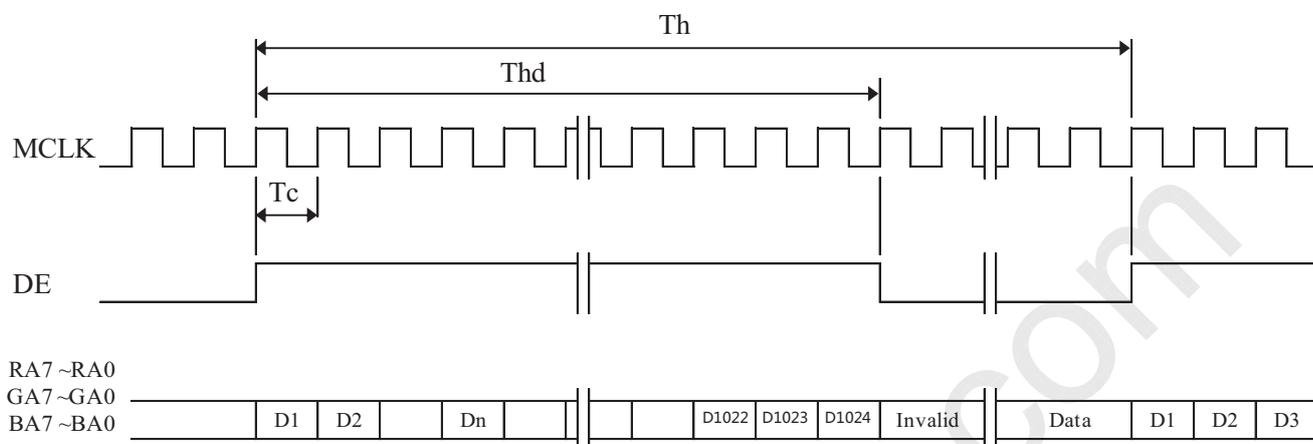

SPEC. NUMBER

SPEC. TITLE

PAGE

S

B4 ZV190E0M-N10 Product Specification Rev.A

17 OF 30



PRODUCT GROUP

REV

ISSUE DATE

TFT- LCD PRODUCT

Ver.A

2019.08.02

8.0 INPUT SIGNALS, BASIC DISPLAY COLORS & GRAY SCALE OF COLORS

Color & Gray Scale		RED DATA								GREEN DATA								BLUE DATA							
		R7	R6	R5	R4	R3	R2	R1	R0	G7	G6	G5	G4	G3	G2	G1	G0	B7	B6	B5	B4	B3	B2	B1	B0
Basic Colors	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Blue	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1
	Green	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
	Cyan	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
	Red	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Magenta	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1
	Yellow	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
	White	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Gray Scale of RED	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
	△	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
	Darker	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
	△	↑								↑															
	▽	↓								↓															
	Brighter	1	1	1	1	1	1	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
	▽	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
	Red	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
Gray Scale of GREEN	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
	△	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	
	Darker	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0		
	△	↑								↑															
	▽	↓								↓															
	Brighter	0	0	0	0	0	0	0	1	1	1	1	1	1	0	1	0	0	0	0	0	0	0		
	▽	0	0	0	0	0	0	0	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0		
	Green	0	0	0	0	0	0	0	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0		
Gray Scale of BLUE	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
	△	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	
	Darker	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	
	△	↑								↑															
	▽	↓								↓															
	Brighter	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	0	1		
	▽	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	0		
	Blue	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1		
Gray Scale of WHITE	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
	△	0	0	0	0	0	0	1	0	0	0	0	0	0	1	0	0	0	0	0	0	0	1		
	Darker	0	0	0	0	0	0	1	0	0	0	0	0	0	1	0	0	0	0	0	0	0	1		
	△	↑								↑															
	▽	↓								↓															
	Brighter	1	1	1	1	1	1	0	1	1	1	1	1	1	0	1	1	1	1	1	1	0	1		
	▽	1	1	1	1	1	1	0	1	1	1	1	1	1	0	1	1	1	1	1	1	1	0		
	White	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1		

SPEC. NUMBER

SPEC. TITLE

PAGE

S

B4 ZV190E0M-N10 Product Specification Rev.A

18 OF 30

BOE**PRODUCT GROUP**

REV

ISSUE DATE


TFT- LCD PRODUCT

Ver.A

2019.08.02

9.0 POWER SEQUENCE

To prevent a latch-up or DC operation of the LCD module, the power on/off sequence shall be as shown in below.

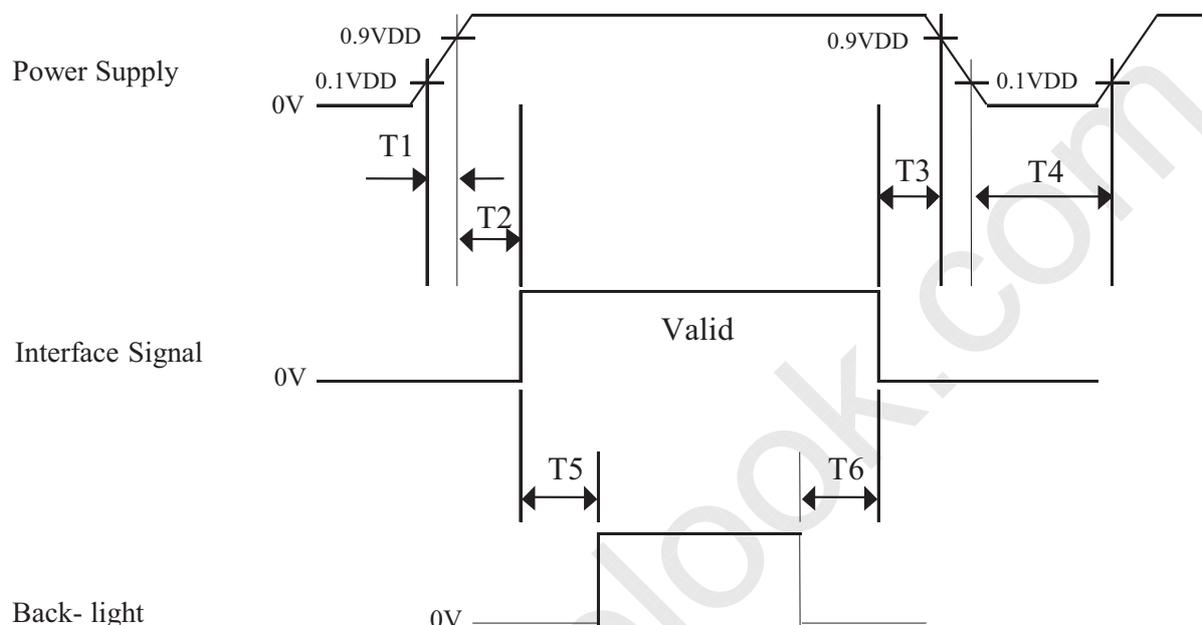

- $0.5 \text{ ms} \leq T1 \leq 10 \text{ ms}$
- $0 \leq T2 \leq 50 \text{ ms}$
- $0 < T3 \leq 50 \text{ ms}$
- $1 \text{ sec} \leq T4$
- $200 \text{ ms} \leq T5$
- $200 \text{ ms} \leq T6$

Notes:

1. When the power supply VDD is 0V, keep the level of input signals on the low or keep high impedance.
2. Do not keep the interface signal high impedance when power is on.
3. Back Light must be turn on after power for logic and interface signal are valid.
4. T7 decreases smoothly, there is none re-bouncing voltage.
5. If $T3=0\text{ms}$, there is a risk of flicker when power On/Off.
6. If $T6=0\text{ms}$, there is a risk of abnormal display when power off.

SPEC. NUMBER

S

SPEC. TITLE

B4 ZV190E0M-N10 Product Specification Rev.A

PAGE

19 OF 30

BOE

PRODUCT GROUP

REV

ISSUE DATE


TFT- LCD PRODUCT

Ver.A

2019.08.02

9.0 POWER SEQUENCE

To prevent a latch-up or DC operation of the LCD module, the power on/off sequence shall be as shown in below.

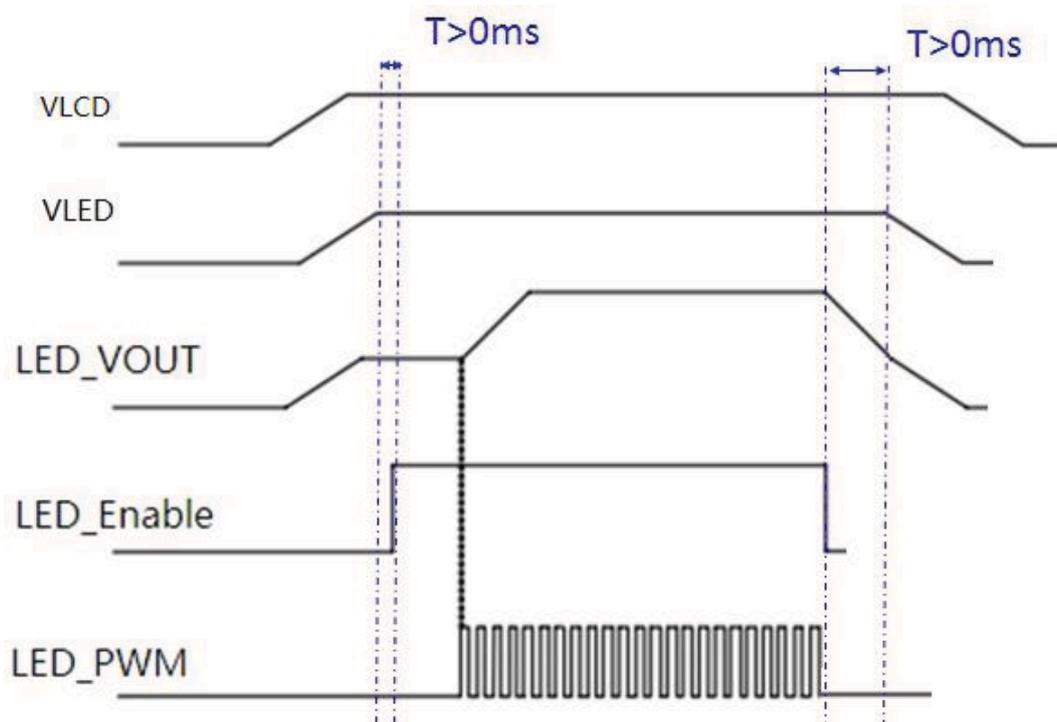

Notes:

1. For LED driver only

SPEC. NUMBER

S

SPEC. TITLE

B4 ZV190E0M-N10 Product Specification Rev.A

PAGE

20 OF 30

DAS-RD-2019015-O

A4(210 X 297)

BOE**PRODUCT GROUP**

REV

ISSUE DATE

TFT- LCD PRODUCT

Ver.A

2019.08.02

10.0 MECHANICAL CHARACTERISTICS**10.1 Dimensional Requirements**

FIGURE 6 (located in Appendix) shows mechanical outlines for the model ZV190E0M-N10. Other parameters are shown in Table 5.

<Table 5. Dimensional Parameters>

Parameter	Specification	Unit
Dimensional outline	396(H) x 324(V) x9.9(D) typ.	mm
Weight	TBD (Typ.)	gram
Active area	374.78(H) × 299.83(V)	mm
Pixel pitch	0.0976(H) x 0.2928(V)	mm
Number of pixels	1280 (H) × 1024 (V) (1 pixel = R + G + B dots)	pixels
Back-light	Horizontal arranged, 1-LED Lighting Bar type	

10.2 Mounting

See FIGURE 5. (shown in Appendix)

10.3 Anti-Glare and Polarizer Hardness.

The surface of the LCD has an anti-glare coating to minimize reflection and a coating to reduce scratching.

10.4 Light Leakage

There shall not be visible light from the back-lighting system around the edges of the screen as seen from a distance 50cm from the screen with an overhead light level of 350lux.

SPEC. NUMBER

S

SPEC. TITLE

B4 ZV190E0M-N10 Product Specification Rev.A

PAGE

21 OF 30

BOE**PRODUCT GROUP**

REV

ISSUE DATE

TFT- LCD PRODUCT

Ver.A

2019.08.02

11.0 RELIABILITY TEST

The Reliability test items and its conditions are shown in below.

<Table 6. Reliability Test Parameters >

No	Test Items	Conditions	
1	High temperature storage test	Ta = 70 °C,, 240 hrs	
2	Low temperature storage test	Ta = -25 °C, 240 hrs	
3	High temperature & high humidity operation test	Ta = 50 °C, 80%RH, 240hrs	
4	High temperature operation test	Ta = 70 °C, 240hrs	
5	Low temperature operation test	Ta = -20°C, 240hrs	
6	Thermal shock	Ta = -20 °C ↔ 60 °C (0.5 hr), 100 cycle	
7	Vibration test (non-operating)	Frequency	Random,10 ~ 300 Hz, 30 min/Axis
		Gravity\AMP	1.05 Grms
		Period	X, Y, Z 30 min
8	Shock test (non-operating)	Gravity	50G
		Pulse width	11msec, sine wave
		Direction	± X, ± Y, ± Z Once for each
9	Electro-static discharge test	Air : 150 pF, 330Ω, ± 20KV Contact : 150 pF, 330Ω, ± 18 KV	

SPEC. NUMBER

SPEC. TITLE

PAGE

S

B4 ZV190E0M-N10 Product Specification Rev.A

22 OF 30

DAS-RD-2019015-O

A4(210 X 297)

BOE**PRODUCT GROUP**

REV

ISSUE DATE

TFT- LCD PRODUCT

Ver.A

2019.08.02

12.0 HANDLING & CAUTIONS

(1) Cautions when taking out the module

- Pick the pouch only, when taking out module from a shipping package.

(2) Cautions for handling the module

- As the electrostatic discharges may break the LCD module, handle the LCD module with care. Peel a protection sheet off from the LCD panel surface as slowly as possible.
- As the LCD panel and back - light element are made from fragile glass material, impulse and pressure to the LCD module should be avoided.
- As the surface of the polarizer is very soft and easily scratched, use a soft dry cloth without chemicals for cleaning.
- Do not pull the interface connector in or out while the LCD module is operating.
- Put the module display side down on a flat horizontal plane.
- Handle connectors and cables with care.

(3) Cautions for the operation

- When the module is operating, do not lose CLK, ENAB signals. If any one of these signals is lost, the LCD panel would be damaged.
- Obey the supply voltage sequence. If wrong sequence is applied, the module would be damaged.
- Ultra-violet ray filter is necessary for outdoor operation
- If the product will be used in extreme conditions such as high temperature, humidity, display patterns, operation time, etc., it is strongly recommended to contact BOE for application engineering device. Otherwise, the reliability and function of the module may not be guaranteed. Extreme conditions are commonly found at airports, transit stations, banks, stocks, markets, and controlling systems.

(4) Cautions for the atmosphere

- Dew drop atmosphere should be avoided.
- Do not store and/or operate the LCD module in a high temperature and/or humidity atmosphere. Storage in an electro-conductive polymer packing pouch and under relatively low temperature atmosphere is recommended.

(5) Cautions for the module characteristics

- Do not apply fixed pattern data signal to the LCD module at product aging.
- Applying fixed pattern for a long time may cause image sticking.

SPEC. NUMBER

S

SPEC. TITLE

B4 ZV190E0M-N10 Product Specification Rev.A

PAGE

23 OF 30

BOE**PRODUCT GROUP**

REV

ISSUE DATE

TFT- LCD PRODUCT

Ver.A

2019.08.02

12.0 HANDLING & CAUTIONS

(6) Other cautions

- Do not disassemble and/or re-assemble LCD module.
- Do not re-adjust variable resistor or switch etc.
- When returning the module for repair or etc., Please pack the module not to be broken. We recommend to use the original shipping packages.
- When this reverse model is used as a forward-type model (PCB on top side), BOE can not guarantee any defects of LCM.
- If LCD module containing system is out of BOE 's operating or storing condition, BOE can not guarantee LCD module operating properly.

SPEC. NUMBER

S

SPEC. TITLE

B4 ZV190E0M-N10 Product Specification Rev.A

PAGE

24 OF 30

BOE

PRODUCT GROUP

REV

ISSUE DATE

TFT- LCD PRODUCT

Ver.A

2019.08.02

13.0 PRODUCT SERIAL NUMBER

Digit	1		2		3		4		5		6				7			
Code	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x
Des.	1. Control Number 2. Rank/Grade 3. Line Classification 4. Year(2001:01, 2002:02, ...) 5. Month(1, 2, 3, ..., 9, X, Y, Z) 6. Internal Use 7. Serial Number																	

SPEC. NUMBER

S

SPEC. TITLE

B4 ZV190E0M-N10 Product Specification Rev.A

PAGE

25 OF 30

BOE**PRODUCT GROUP**

REV

ISSUE DATE





TFT- LCD PRODUCT

Ver.A

2019.08.02

14.0 Packing**14.1 Packing Order**

Put 1 EPO bottom into the inner box.

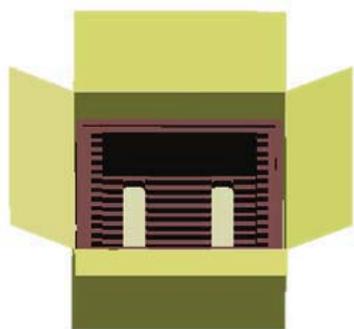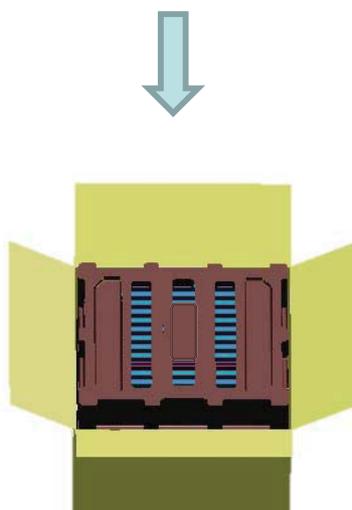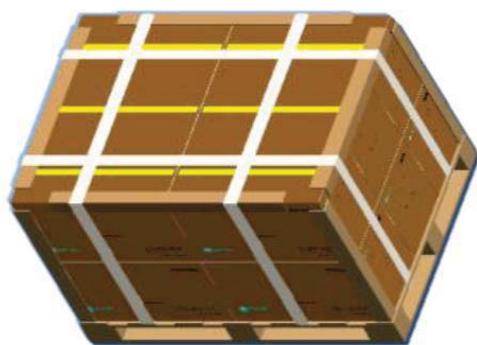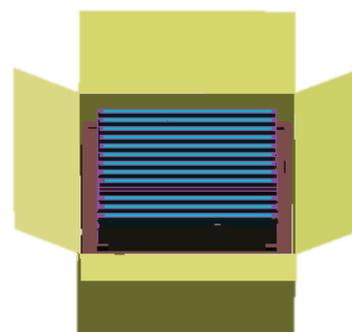Put each module into a PE bag.
Insert 13 Pcs MDL into each boxPlace paper corners and wrap film around the boxes.
Pack with 4 packing belts.
Put the boxes on the pallet (12ea boxes per ballet)

Put 1 EPO cover in and seal the box.

SPEC. NUMBER

S

SPEC. TITLE

B4 ZV190E0M-N10 Product Specification Rev.A

PAGE

26 OF 30

A4(210 X 297)



PRODUCT GROUP

REV

ISSUE DATE

TFT- LCD PRODUCT

Ver.A

2019.08.02

14.2 Packing Note

- Box Dimension : 478mm(W) × 374mm(L) × 413mm(H)
- Package Quantity in one Box : 13pcs

14.3 Box label

- Label Size : 110 mm (L) × 55 mm (W)

- Contents



Model : ZV190E0M-N10

Q`ty : Module 13 Q`ty in one box

Serial No. : Box Serial No. See next page for detail description.

Date : Packing Date

FG Code : FG Code of Product

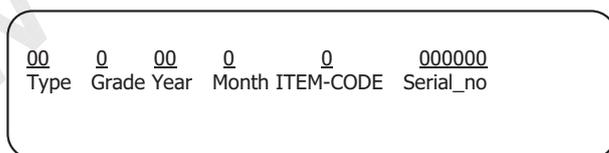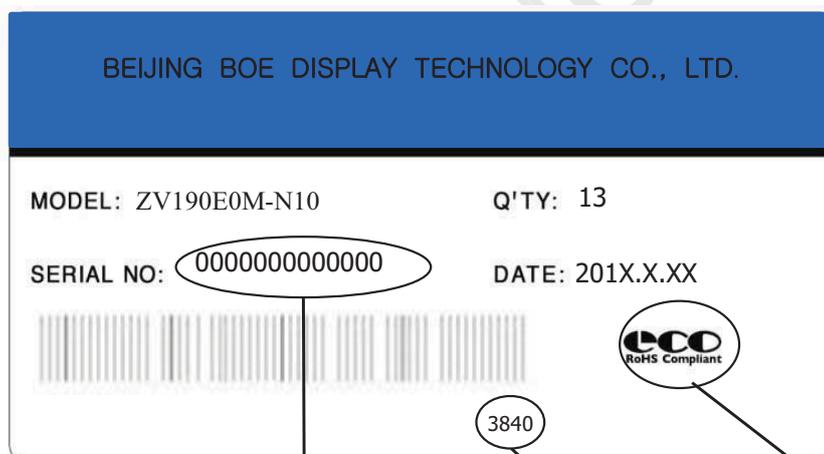

3840



Internal CODE

RoHS Mark

SPEC. NUMBER

SPEC. TITLE

PAGE

S

B4 ZV190E0M-N10 Product Specification Rev.A

27 OF 30



PRODUCT GROUP

REV

ISSUE DATE

TFT- LCD PRODUCT

Ver.A

2019.08.02

15.0 APPENDIX

Figure 1. Measurement Set Up


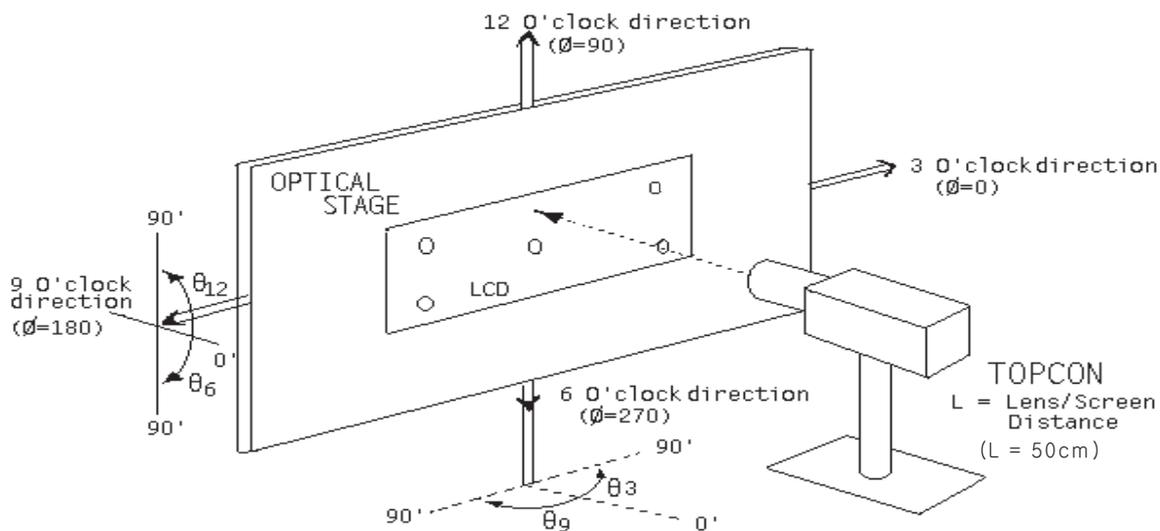


Figure 2. White Luminance and Uniformity Measurement Locations (9 points)

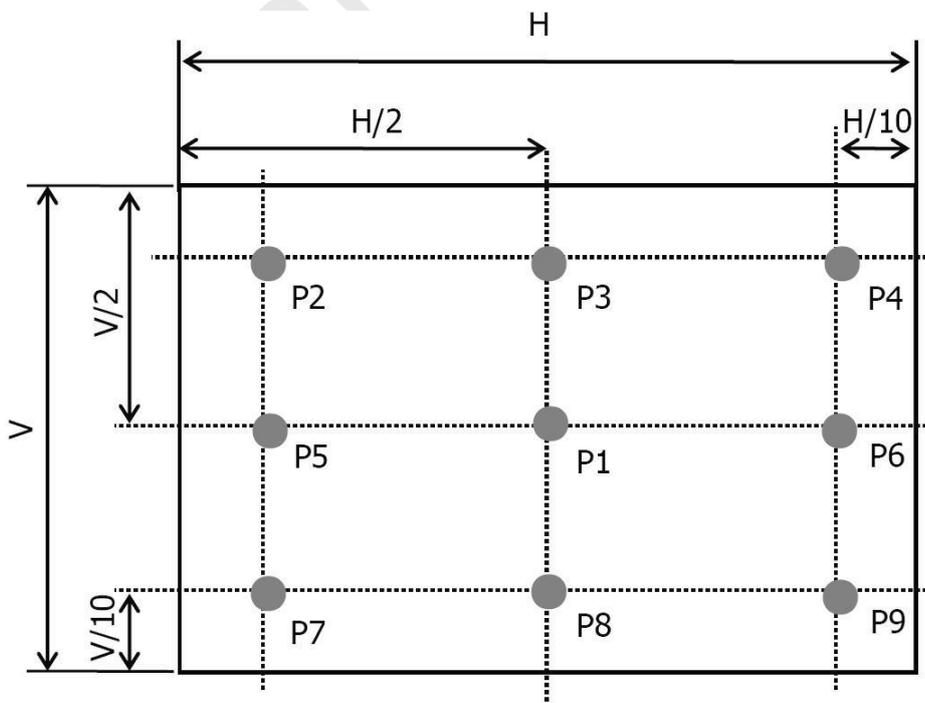

SPEC. NUMBER

S

SPEC. TITLE

B4 ZV190E0M-N10 Product Specification Rev.A

PAGE

28 OF 30



PRODUCT GROUP

REV

ISSUE DATE

TFT- LCD PRODUCT

Ver.A

2019.08.02

Figure 3. Response Time Testing


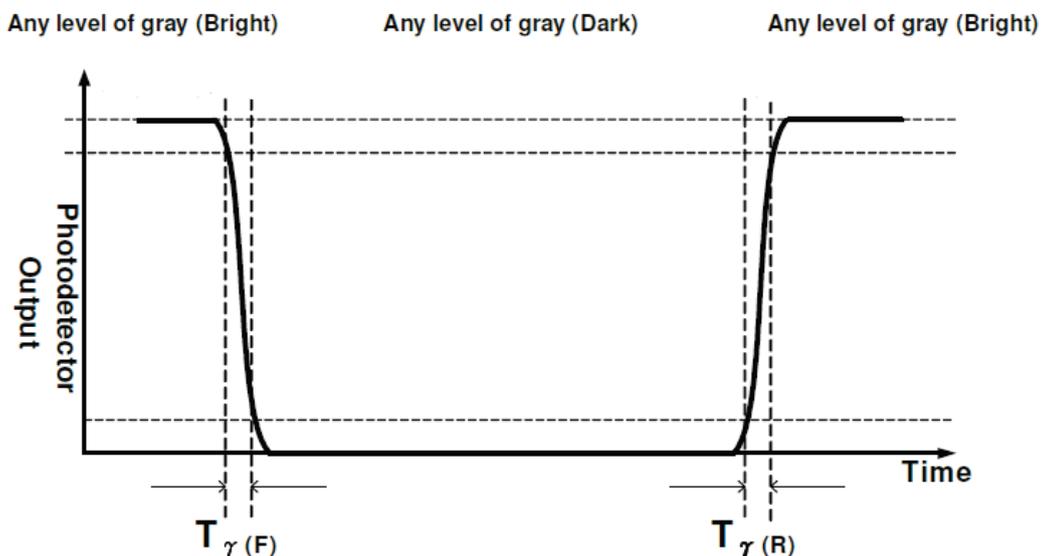


Figure 4. Cross Modulation Test Description

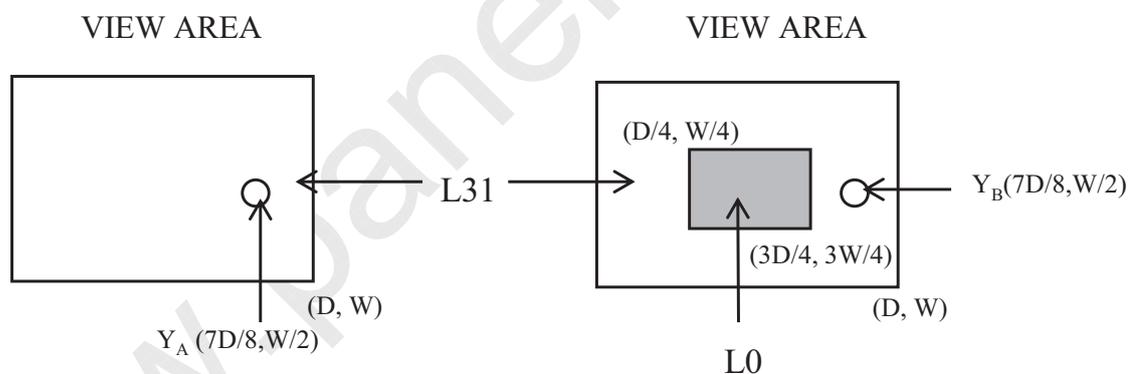

$$\text{Cross-Talk (\%)} = \left| \frac{Y_B - Y_A}{Y_A} \right| \times 100$$

Where: Y_A = Initial luminance of measured area (cd/m²)

Y_B = Subsequent luminance of measured area (cd/m²)

The location measured will be exactly the same in both patterns

SPEC. NUMBER

SPEC. TITLE

PAGE

S

B4 ZV190E0M-N10 Product Specification Rev.A

29 OF 30

BOE

PRODUCT GROUP

REV


ISSUE DATE

TFT- LCD PRODUCT

Ver.A

2019.08.02

Figure 5. TFT-LCD Module Outline Dimensions (Front view)

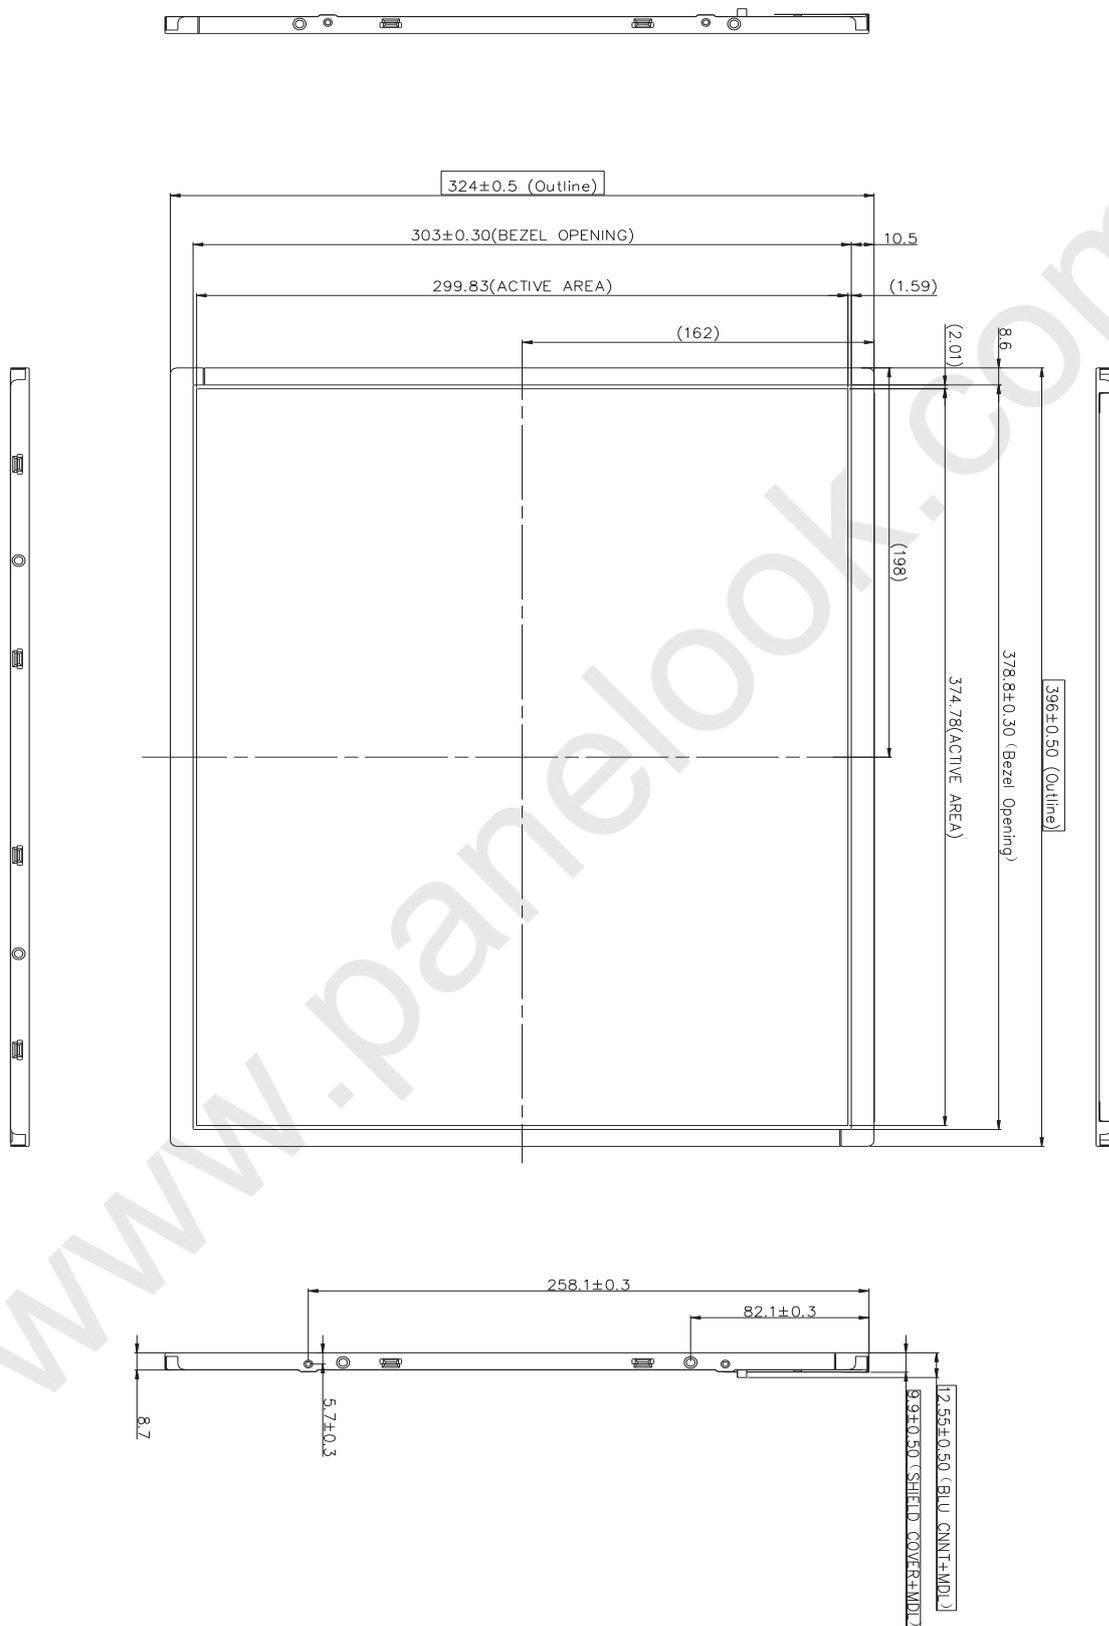

SPEC. NUMBER

SPEC. TITLE

PAGE

S

B4 ZV190E0M-N10 Product Specification Rev.A

30 OF 30

