



Product Specification

G270ZAN01.2

AU OPTRONICS CORPORATION

() Preliminary Specifications

(v) Final Specifications

Module	27.0 Inch Color TFT-LCD
Model Name	G270ZAN01.2

<table><tr><td>Customer</td><td>Date</td></tr><tr><td> </td><td> </td></tr><tr><td>Checked & Approved by</td><td>Date</td></tr><tr><td> </td><td> </td></tr></table>	Customer	Date			Checked & Approved by	Date			<table><tr><td>Approved by</td><td>Date</td></tr><tr><td><i>Jason.C.L.Pan</i></td><td><u>2021. 02. 24</u></td></tr><tr><td>Prepared by</td><td>Date</td></tr><tr><td><i>Livia Huang</i></td><td><u>2021. 02. 24</u></td></tr></table>	Approved by	Date	<i>Jason.C.L.Pan</i>	<u>2021. 02. 24</u>	Prepared by	Date	<i>Livia Huang</i>	<u>2021. 02. 24</u>
Customer	Date																
Checked & Approved by	Date																
Approved by	Date																
<i>Jason.C.L.Pan</i>	<u>2021. 02. 24</u>																
Prepared by	Date																
<i>Livia Huang</i>	<u>2021. 02. 24</u>																
Customer's sign back page	General Display Business Division / AU Optronics corporation																

G270ZAN01.2

1/29



Product Specification

G270ZAN01.2

AU OPTRONICS CORPORATION

Contents

1. Operating Precautions	4
2. General Description	5
2.1 Display Characteristics.....	5
2.2 Optical Characteristics	6
3. Functional Block Diagram	9
4. Absolute Maximum Ratings	10
4.1 Absolute Ratings of TFT LCD Module	10
4.2 Absolute Ratings of Environment	10
5. Electrical Characteristics	11
5.1 TFT LCD Module.....	11
5.2 Backlight Unit	13
6. Signal Characteristic	15
6.1 Pixel Format Image	15
6.2 Scanning Direction	16
6.3 Signal Description	17
6.4 The Input Data Format	20
6.5 Interface Timing	22
6.6 Power ON/OFF Sequence	24
7. Reliability Test Criteria	25
8. Mechanical Characteristics	26
8.1 LCM Outline Dimension	26
9. Label and Packaging	28
9.1 Shipping Label (on the rear side of TFT-LCD display)	28
9.2 Carton Package	28
10 Safety	29
10.1 Sharp Edge Requirements.....	29
10.2 Materials	29
10.3 Capacitors.....	29
10.4 National Test Lab Requirement.....	29



Product Specification

G270ZAN01.2

AU OPTRONICS CORPORATION

Record of Revision

Version	Date (yyyy/m/d)	Page	Old description	New Description
1.0	2021/02/24	All	First Edition for Customer	

G270ZAN01.2

3/29



Product Specification

G270ZAN01.2

AU OPTRONICS CORPORATION

1. Operating Precautions

- 1) Since front polarizer is easily damaged, please be cautious and not to scratch it.
- 2) Be sure to turn off power supply when inserting or disconnecting from input connector.
- 3) Wipe off water drop immediately. Long contact with water may cause discoloration or spots.
- 4) When the panel surface is soiled, wipe it with absorbent cotton or soft cloth.
- 5) Since the panel is made of glass, it may be broken or cracked if dropped or bumped on hard surface.
- 6) To avoid ESD (Electro Static Discharge) damage, be sure to ground yourself before handling TFT-LCD Module.
- 7) Do not open nor modify the module assembly.
- 8) Do not press the reflector sheet at the back of the module to any direction.
- 9) In case if a module has to be put back into the packing container slot after it was taken out from the container, do not press the center of the LED light bar edge. Instead, press at the far ends of the LED light bar edge softly. Otherwise the TFT Module may be damaged.
- 10) At the insertion or removal of the Signal Interface Connector, be sure not to rotate nor tilt the Interface Connector of the TFT Module.
- 11) TFT-LCD Module is not allowed to be twisted & bent even force is added on module in a very short time. Please design your display product well to avoid external force applying to module by end-user directly.
- 12) Small amount of materials having no flammability grade is used in the LCD module. The LCD module should be supplied by power complied with requirements of Limited Power Source (IEC60950 or UL1950), or be applied exemption.
- 13) Severe temperature condition may result in different luminance, response time and lamp ignition voltage.
- 14) Continuous operating TFT-LCD display under low temperature environment may accelerate lamp exhaustion and reduce luminance dramatically.
- 15) The data on this specification sheet is applicable when LCD module is placed in landscape position.
- 16) Continuous displaying fixed pattern may induce image sticking. It's recommended to use screen saver or shuffle content periodically if fixed pattern is displayed on the screen.



Product Specification

G270ZAN01.2

AU OPTRONICS CORPORATION

2. General Description

This specification applies to the Color Active Matrix Liquid Crystal Display G270ZAN01.2 composed of a TFT-LCD display, a driver and power supply circuit, and a LED backlight system. The screen format is intended to support the UHD (3840(H) x 2160(V)) screen and 16.7M colors.

LED driving board for backlight unit is included. All input signals are 8 lanes eDP interface compatible.

2.1 Display Characteristics

The following items are characteristics summary on the table under 25 °C condition:

Items	Unit	Specifications
Screen Diagonal	[inch]	26.93" (684mm)
Active Area	[mm]	596.16 (H) x 335.34 (V)
Resolution		3840(x3) x 2160
Pixel Pitch	[mm]	0.15525 (per one triad) x 0.15525
Pixel Arrangement		R.G.B. Vertical Stripe
Display Mode		AHVA mode, Normally Black
Nominal Input Voltage VDD	[Volt]	+12V (Typ)
Power Consumption	[Watt]	Total = 65.21W (Typ) LCD =8.57W @ white pattern BLU =56.64W
Weight	[Grams]	3400 (Typ)
Physical Size	[mm]	630.0 (H) x 368.2 (V) x 22.9 (D) (Typ)
Electrical Interface		8-lanes eDP , 8bits RGB data input
Surface Treatment		Anti-Glare treatment
Support Color		16.7M colors (true 8bit)
Temperature Range Operating Storage (Non-Operating)	[°C] [°C]	0 to +50 -20 to +60
RoHS Compliance		



Product Specification

G270ZAN01.2

AU OPTRONICS CORPORATION

2.2 Optical Characteristics

The optical characteristics are measured under stable conditions at 25 °C (Room Temperature):

Item	Unit	Conditions		Min.	Typ.	Max.	Note
White Luminance	cd/m ²	I _{LED} =80mA(center point)		715	850		1
Luminance Uniformity @ white pattern	%	9 points		80	85		2,3
Luminance Uniformity @ black pattern	%	9 points		60			2,3
Contrast Ratio	--			700	1000		4
Response Time	msec	Rising					5
		Falling					
		Rising + Falling			16	25	
Viewing Angle	degree	Horizontal CR >= 10	(Right)	85	89		6
			(Left)	85	89		
		Vertical CR >= 10	(Upper)	85	89		
			(Lower)	85	89		
Color / Chromaticity Coordinates (CIE 1931)	--	Red x		0.636	0.666	0.696	
		Red y		0.282	0.312	0.342	
		Green x		0.237	0.267	0.297	
		Green y		0.637	0.667	0.697	
		Blue x		0.124	0.154	0.184	
		Blue y		0.012	0.042	0.072	
		White x		0.279	0.309	0.339	
		White y		0.287	0.317	0.347	


Note 1: Measurement method

Equipment Pattern Generator, Power Supply, Digital Voltmeter, Luminance meter (SR_3 or equivalent)

Aperture 1° with 50cm viewing distance

Test Point Center

Environment < 1 lux

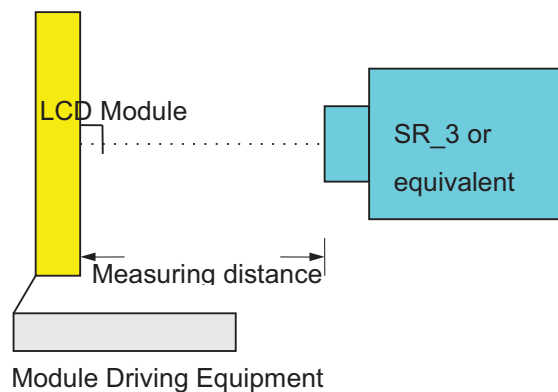

G270ZAN01.2

6/29




Product Specification

G270ZAN01.2

AU OPTRONICS CORPORATION

Note 2: Definition of 9 points position

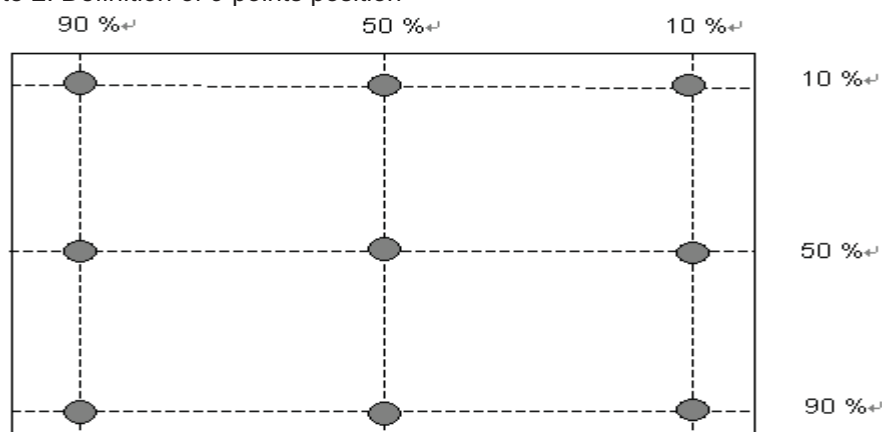

Note 3: The luminance uniformity of 9 points is defined by dividing the minimum luminance values by the maximum test point luminance


$$\delta_{w9} = \frac{\text{Minimum Brightness of nine points}}{\text{Maximum Brightness of nine points}}$$

Note 4: Definition of contrast ratio (CR):

$$\text{Contrast ratio (CR)} = \frac{\text{Brightness on the "White" state}}{\text{Brightness on the "Black" state}}$$

Note 5: Definition of response time:

The output signals of photo detector are measured when the input signals are changed from "White" to "Black" (falling time) and from "Black" to "White" (rising time), respectively. The response time interval is between 10% and 90% of amplitudes. Please refer to the figure as below.

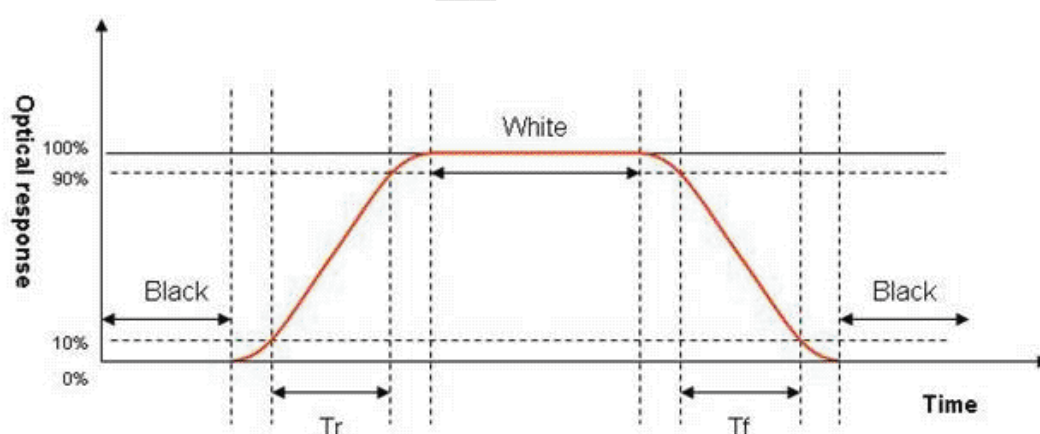

Note 6: Definition of viewing angle

Viewing angle is the measurement of contrast ratio ≥ 10 , at the screen center, over a 180° horizontal and 180° vertical range (off-normal viewing angles). The 180° viewing angle range is broken down as below: 90° (θ) horizontal left and right, and 90° (Φ) vertical high (up) and low (down). The measurement direction is typically perpendicular to

G270ZAN01.2

7/29




Product Specification

G270ZAN01.2

AU OPTRONICS CORPORATION

the display surface with the screen rotated to its center to develop the desired measurement viewing angle.

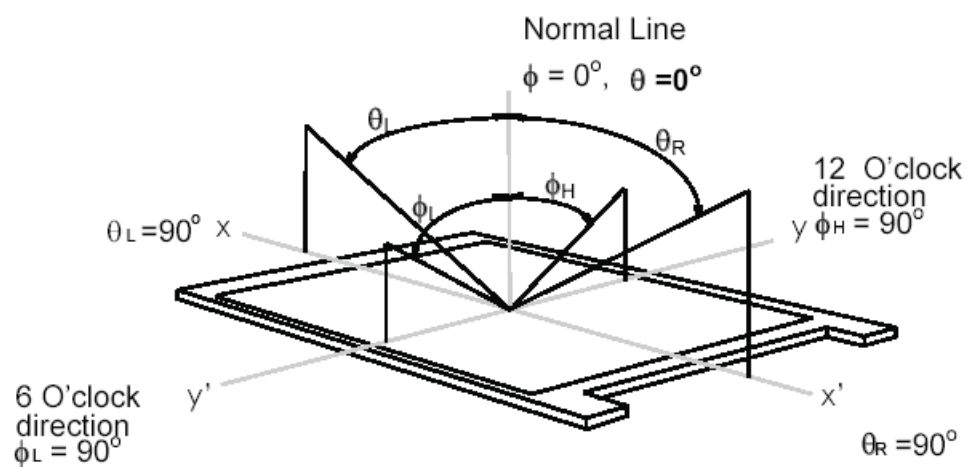




Product Specification

G270ZAN01.2

AU OPTRONICS CORPORATION

3. Functional Block Diagram

The following diagram shows the functional block of the 27.0 inch color TFT/LCD module:

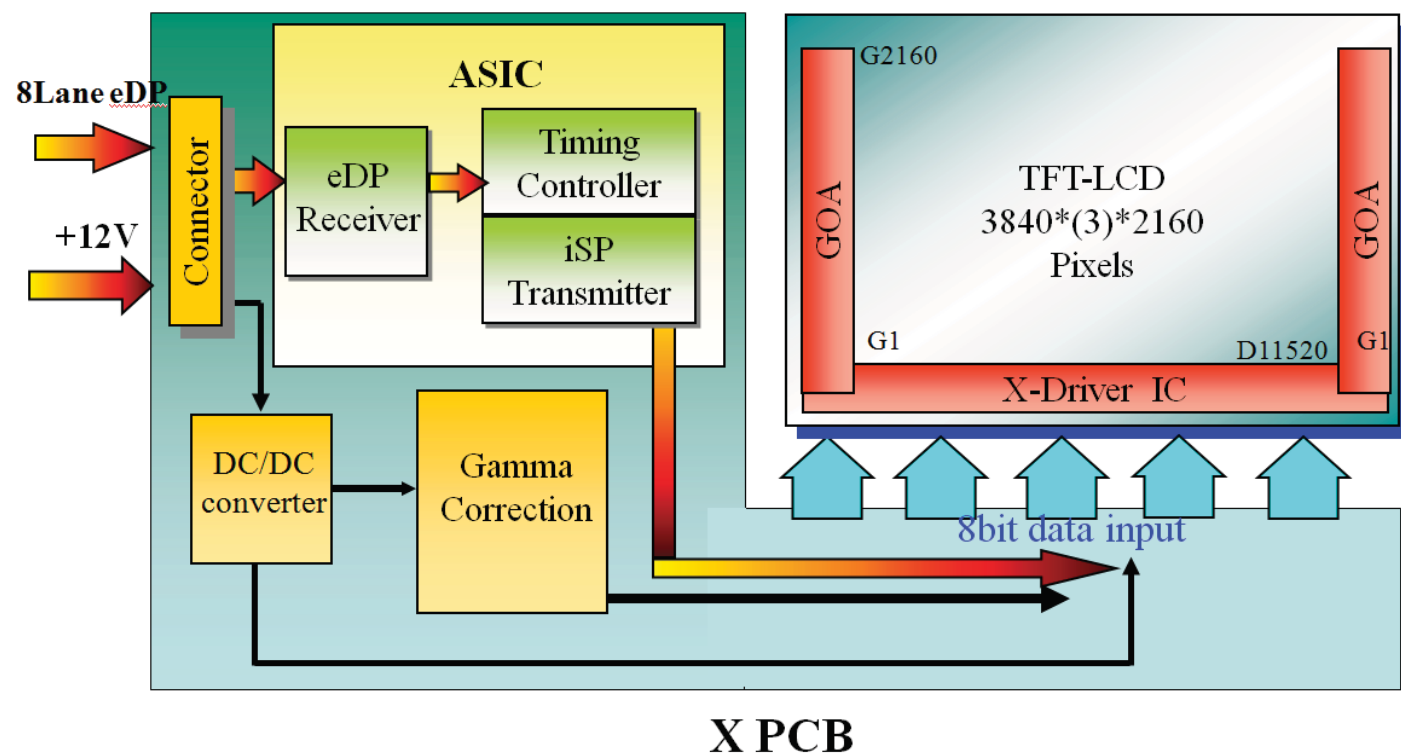**X PCB**

G270ZAN01.2

9/29



Product Specification

G270ZAN01.2

AU OPTRONICS CORPORATION

4. Absolute Maximum Ratings

4.1 Absolute Ratings of TFT LCD Module

Item	Symbol	Min	Max	Unit
Logic/LCD drive Voltage	Vin	GND-0.3	14	[Volt]

4.2 Absolute Ratings of Environment

Item	Symbol	Min	Max	Unit
Operating Temperature	TOP	0	+50	[°C]
Operation Humidity	HOP	5	90	[%RH]
Storage Temperature	TST	-20	+60	[°C]
Storage Humidity	HST	5	90	[%RH]

Note: Maximum Wet-Bulb should be 39 °C and no condensation.

G270ZAN01.2

10/29



Product Specification

G270ZAN01.2

AU OPTRONICS CORPORATION

5. Electrical Characteristics



5.1 TFT LCD Module

5.1.1 Power Specification

Input power specifications are shown as follows:

Symbol	Parameter	Min	Typ	Max	Units	Remark
VDD	Power supply Input voltage	10.8	12.0	13.2	[Volt]	
IDD	Power supply Input Current (RMS)	-	0.71	0.85	[A]	VDD= 12.0V, White pattern, Fv=144Hz
			0.65	0.78		VDD= 12.0V, White pattern, Fv=120Hz
IRush	Inrush Current	-	-	3.0	[A]	Note 1
PDD	VDD Power Consumption	-	8.57	10.2	[Watt]	VDD= 12.0V , White pattern, Fv=144Hz
			7.80	9.36		VDD= 12.0V, White pattern, Fv=120Hz
VDDrp	Allowable VDD Ripple Voltage	-	-	VDD* 5%	[mV]	VDD= 12.0V, White pattern, Fv=60Hz

Note 1: Measurement condition:

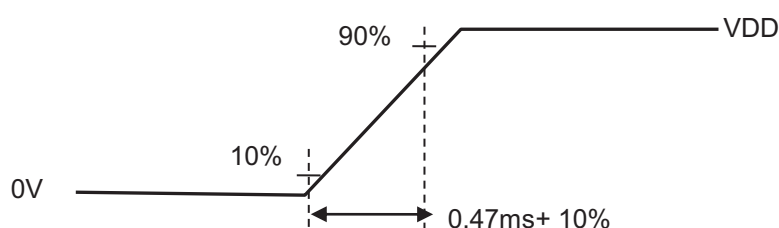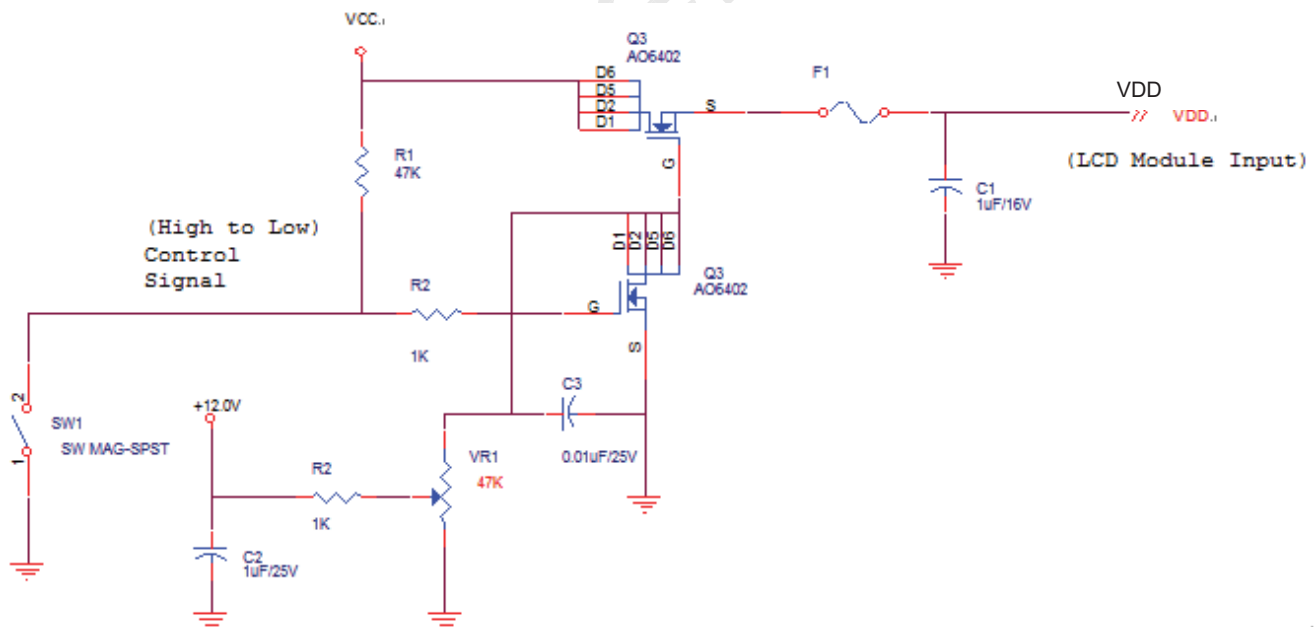**VDD rising time**

G270ZAN01.2

11/29



Product Specification

G270ZAN01.2


AU OPTRONICS CORPORATION

5.1.2 eDP Electrical Characteristics

Follow as VESA DisplayPort Standard Version 1.2


a. DisplayPort main link signal:

DisplayPort main link					
		Min	Typ	Max	unit
VCM	RX input DC Common Mode Voltage	-	0	-	V
VDiff _{P-P}	Peak-to-peak Voltage at a receiving Device	70	-	-	mV

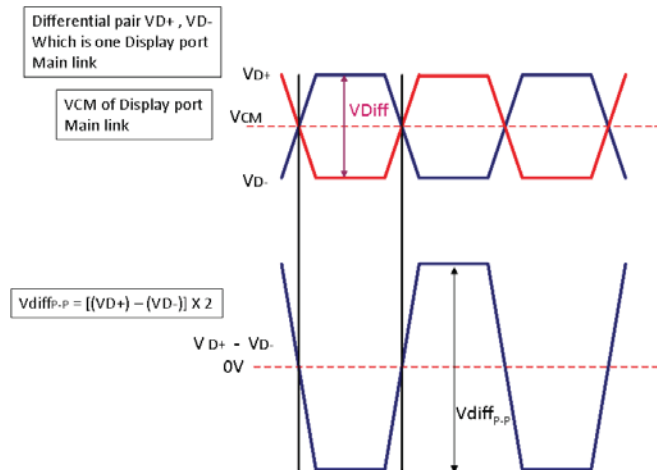

b. DisplayPort AUX_CH signal:

DisplayPort AUX_CH					
		Min	Typ	Max	unit
VCM	AUX DC Common Mode Voltage	0	-	2.0	V
VDiff _{P-P}	AUX Peak-to-peak voltage at a receiving device	0.27	-	1.36	V

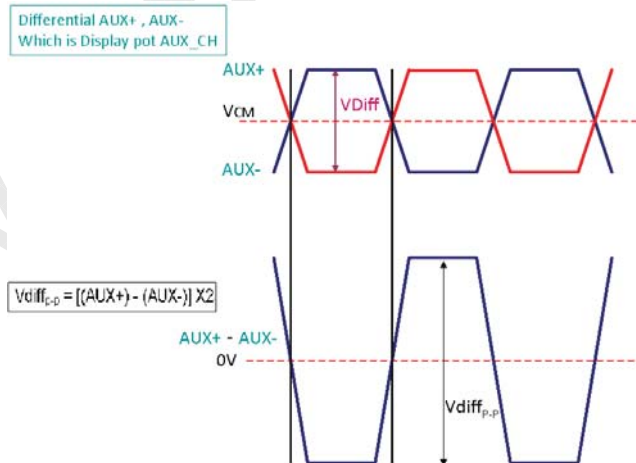

c. DisplayPort VHPD signal:

DisplayPort VHPD					
		Min	Typ	Max	unit
VHPD	HPD Voltage	2.25	-	3.6	V

G270ZAN01.2

12/29



Product Specification

G270ZAN01.2

AU OPTRONICS CORPORATION

5.2 Backlight Unit

5.2.1 LED Backlight Unit : Driver Connector

Backlight	manufacturer	JST
	part number	S14B-PH-SM6-K-TB(HF)
Mating	manufacturer	JST
	part number	PHR-14

5.2.2 Signal for LED connector

Pin #	Symbol	Pin Description
1	NC	Do not connect
2	Dimming	PWM; duty 10%~ 100%
3	EN	Enable(0V:disable, 2.5~5V:Enable)
4	NC	Do not connect
5	GND	GND
6	GND	GND
7	GND	GND
8	GND	GND
9	GND	GND
10	VDD	Power +24V
11	VDD	Power +24V
12	VDD	Power +24V
13	VDD	Power +24V
14	VDD	Power +24V



Product Specification

G270ZAN01.2

AU OPTRONICS CORPORATION

5.2.3 Backlight input signal characteristics

Following characteristics are measured under a stable condition using an inverter at 25°C (Room Temperature):

Symbol	Parameter	Min.	Typ.	Max.	Unit	Remark
VDD	Input Voltage	21.6	24.0	26.4	[Volt]	
I_{VDD}	Input Current		2.36	2.83	[A]	100% PWM Duty
P_{VDD}	Power Consumption		56.64	67.92	[Watt]	100% PWM Duty
I_{rush LED}	Inrush Current	-	-	6	[A]	at rising time=470us
F_{PWM}	Dimming Frequency		0.2	20	[kHz]	
	Swing Voltage	3	3.3	5	V	
	Dimming Duty Cycle	10	-	100	%	
I_F (one channel)	LED Forward Current		80		mA	Ta = 25°C
V_F (one channel)	LED Forward Voltage	-	-	-	Volt	
		-	33.0	37.4	Volt	I _F =80 mA, Ta = 25°C 10 channel/LB & 2 LB/Panel
		-	3.0	3.4		
P_{LED} (One LB)	LED Power Consumption	-	26.40	29.92	Watt	I _F =80 mA, Ta = 25°C LBx2 : 29.92x2=59.84(Max)
LED Lifetime		30,000			Hrs	I _F =80 mA, Ta= 25°C

Note 1: Ta means ambient temperature of TFT-LCD module.

Note 2: VDD, P_{VDD}, P_{VDD}, I_{rush LED} are defined for LED B/L.(100% duty of PWM dimming)

Note 3: I_F, V_F are defined for one channel LED. There are ten LED channels in one light bar. P_{LED} is defined for one light bar. For G270ZAN01.2, there are two light bars in back light unit.

Note 4: If G270ZAN01.2 module is driven by high current or at high ambient temperature & humidity condition. The operating life will be reduced.

Note 5: LED life means brightness goes down to 50% initial brightness.

Note 6: Only one kind types for adjusting brightness: PWM .



Product Specification


G270ZAN01.2

AU OPTRONICS CORPORATION

6. Signal Characteristic

6.1 Pixel Format Image

Following figure shows the relationship between input signal and LCD pixel format.

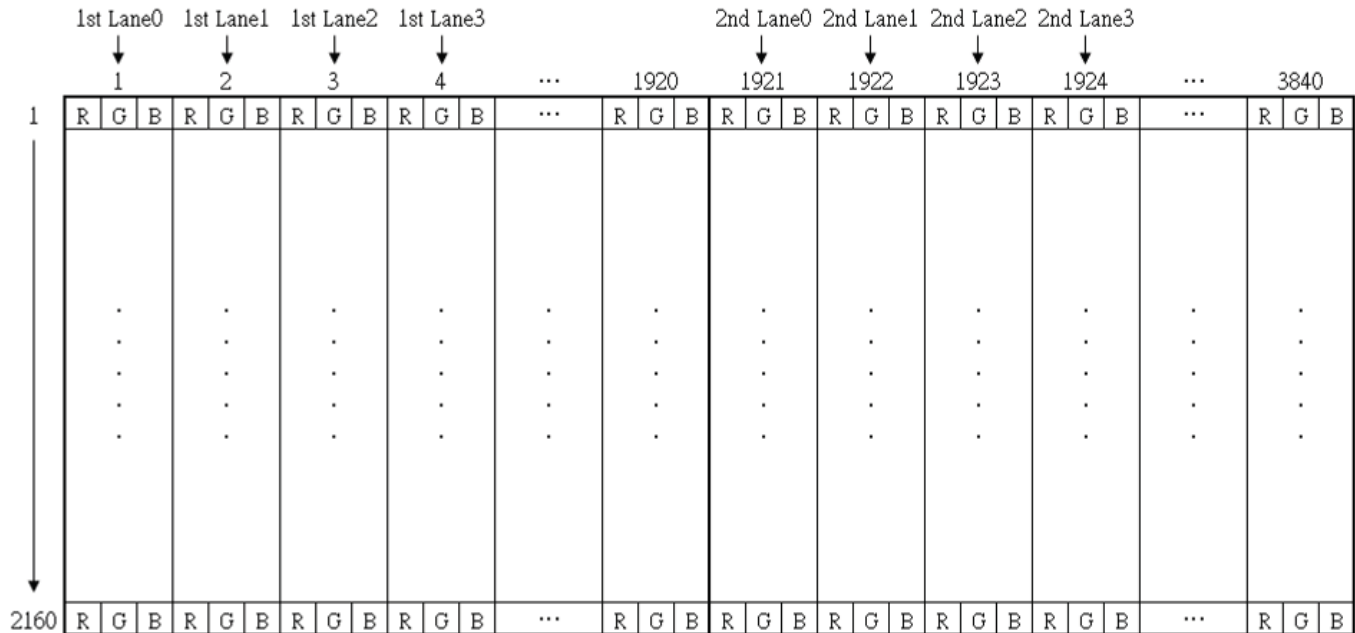

Note: The module use 8-Lanes eDP interface.

1st port:

1st Lane0 : $1+4n$ pixel

1st Lane1 : $2+4n$ pixel

1st Lane2 : $3+4n$ pixel

1st Lane3 : $4+4n$ pixel

2nd port:

2nd Lane0 : $1921+4n$ pixel

2nd Lane1 : $1922+4n$ pixel

2nd Lane2 : $1923+4n$ pixel

2nd Lane3 : $1924+4n$ pixel

$n=0\sim 479$



Product Specification

G270ZAN01.2

AU OPTRONICS CORPORATION

6.2 Scanning Direction

The following figures show the image seen from the front view. The arrow indicates the direction of scan.





Product Specification

G270ZAN01.2

AU OPTRONICS CORPORATION

6.3 Signal Description

The module uses a LVDS receiver embedded in AUO's ASIC. LVDS is a differential signal technology for LCD interface and a high-speed data transfer device.

6.3.1 TFT LCD Module: LVDS Connector

Connector Name / Designation	Signal Connector
Manufacturer	JAE
Connector Model Number	FI-RTE51SZ-HF
Adaptable Plug	FI-RE51CL

PIN #	Symbol	Description
1	VDD	Power +12V
2	VDD	Power +12V
3	VDD	Power +12V
4	VDD	Power +12V
5	VDD	Power +12V
6	GND	Ground
7	GND	Ground
8	GND	Ground
9	NC	No connection (for AUO test only. Do not connect)
10	NC	No connection (for AUO test only. Do not connect)
11	NC	No connection (for AUO test only. Do not connect)
12	NC	No connection (for AUO test only. Do not connect)
13	NC	No connection (for AUO test only. Do not connect)
14	NC	No connection (for AUO test only. Do not connect)
15	NC	No connection (for AUO test only. Do not connect)
16	NC	No connection (for AUO test only. Do not connect)
17	GND	Ground
18	1st Lane3_N	Negative eDP differential data input
19	1st Lane3_P	Positive eDP differential data input
20	GND	Ground
21	1st Lane2_N	Negative eDP differential data input
22	1st Lane2_P	Positive eDP differential data input
23	GND	Ground
24	1st Lane1_N	Negative eDP differential data input
25	1st Lane1_P	Positive eDP differential data input
26	GND	Ground
27	1st Lane0_N	Negative eDP differential data input

G270ZAN01.2

17/29



Product Specification

G270ZAN01.2

AU OPTRONICS CORPORATION

28	1st Lane0_P	Positive eDP differential data input
29	GND	Ground
30	1st AUX_CH_P	Positive AUX Channel differential data input
31	1st AUX_CH_N	Negative AUX Channel differential data input
32	GND	Ground
33	NC	No connection (for AUO test only. Do not connect)
34	GND	Ground
35	2nd Lane3_N	Negative eDP differential data input
36	2nd Lane3_P	Positive eDP differential data input
37	GND	Ground
38	2nd Lane2_N	Negative eDP differential data input
39	2nd Lane2_P	Positive eDP differential data input
40	GND	Ground
41	2nd Lane1_N	Negative eDP differential data input
42	2nd Lane1_P	Positive eDP differential data input
43	GND	Ground
44	2nd Lane0_N	Negative eDP differential data input
45	2nd Lane0_P	Positive eDP differential data input
46	GND	Ground
47	2nd AUX_CH_P	Positive AUX Channel differential data input
48	2nd AUX_CH_N	Negative AUX Channel differential data input
49	GND	Ground
50	HPD	Hot plug detection
51	GND	Ground

Note 1: Input Signals shall be in low status when VDD is off.

Note 2: High stands for "3.3V", Low stands for "0V", NC means "No Connection".

Note 3: RSV means "Reserved".

G270ZAN01.2


18/29



Product Specification

G270ZAN01.2

AU OPTRONICS CORPORATION

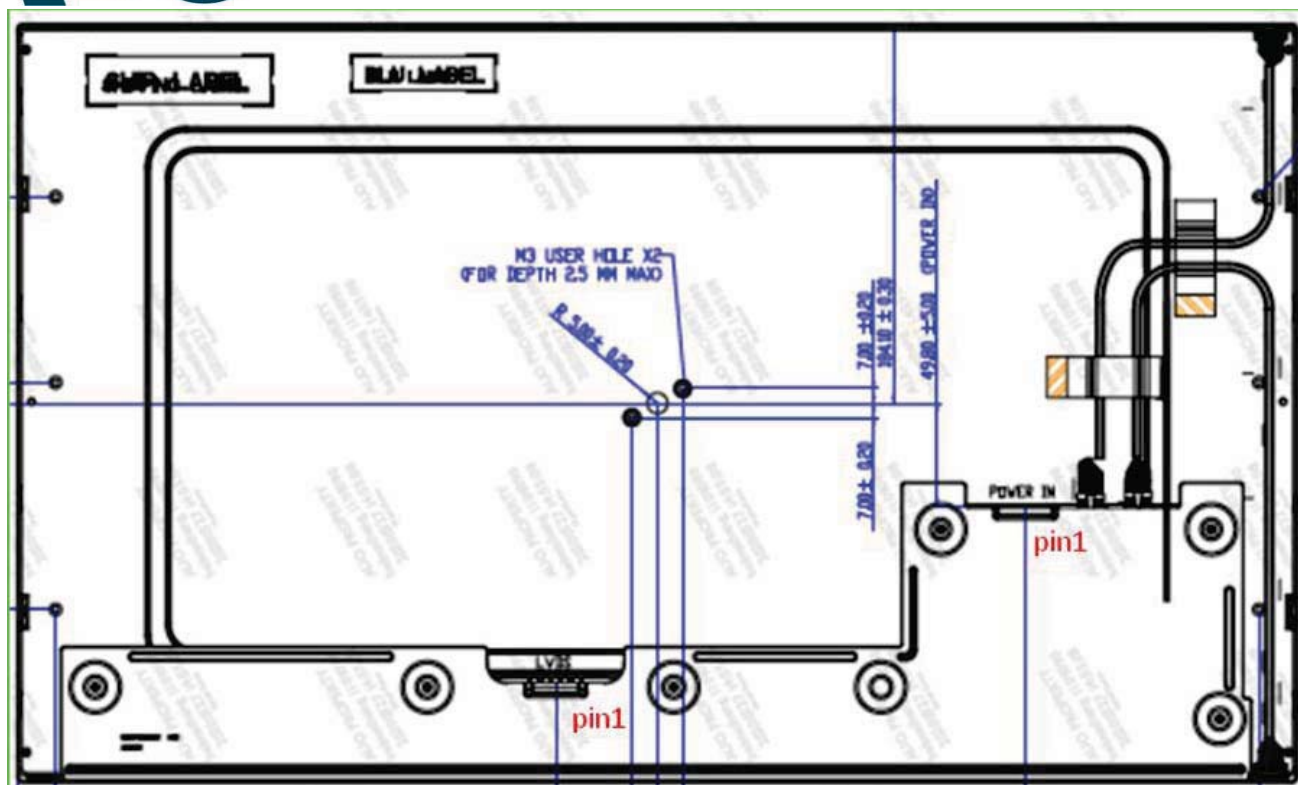

G270ZAN01.2

19/29



Product Specification

G270ZAN01.2

AU OPTRONICS CORPORATION

6.4 The Input Data Format

6.4.1 eDP Data Format

1st Lane0	1st Lane1	1st Lane2	1st Lane3	2nd Lane0	2nd Lane1	2nd Lane2	2nd Lane3
R1-9:2	R2-9:2	R3-9:2	R4-9:2	R1921-9:2	R1922-9:2	R1923-9:2	R1924-9:2
R1-1:0IG1-9:4	R2-1:0IG2-9:4	R3-1:0IG3-9:4	R4-1:0IG4-9:4	R1921-1:0IG1921-9:4	R1922-1:0IG1922-9:4	R1923-1:0IG1923-9:4	R1924-1:0IG1924-9:4
G1-3:0IB1-9:6	G2-3:0IB2-9:6	G3-3:0IB3-9:6	G4-3:0IB4-9:6	G1921-3:0IB1921-9:6	G1922-3:0IB1922-9:6	G1923-3:0IB1923-9:6	G1924-3:0IB1924-9:6
B1-5:0IR5-9:8	B2-5:0IR6-9:8	B3-5:0IR7-9:8	B4-5:0IR8-9:8	B1921-5:0IR1925-9:8	B1922-5:0IR1926-9:8	B1923-5:0IR1927-9:8	B1924-5:0IR1928-9:8
R5-7:0	R6-7:0	R7-7:0	R8-7:0	R1925-7:0	R1926-7:0	R1927-7:0	R1928-7:0
G5-9:2	G6-9:2	G7-9:2	G8-9:2	G1925-9:2	G1926-9:2	G1927-9:2	G1928-9:2
G5-1:0IB5-9:4	G6-1:0IB6-9:4	G7-1:0IB7-9:4	G8-1:0IB8-9:4	G1925-1:0IB1925-9:4	G1926-1:0IB1926-9:4	G1927-1:0IB1927-9:4	G1928-1:0IB1928-9:4
B5-3:0IR9-9:6	B6-3:0IR10-9:6	B7-3:0IR11-9:6	B8-3:0IR12-9:6	B1925-3:0IR1929-9:6	B1926-3:0IR1930-9:6	B1927-3:0IR1931-9:6	B1928-3:0IR1932-9:6
R9-5:0IG9-9:8	R10-5:0IG10-9:8	R11-5:0IG11-9:8	R12-5:0IG12-9:8	R1929-5:0IG1929-9:8	R1930-5:0IG1930-9:8	R1931-5:0IG1931-9:8	R1932-5:0IG1932-9:8
G9-7:0	G10-7:0	G11-7:0	G12-7:0	G1929-7:0	G1930-7:0	G1931-7:0	G1932-7:0
B9-9:2	B10-9:2	B11-9:2	B12-9:2	B1929-9:2	B1930-9:2	B1931-9:2	B1932-9:2
B9-1:0IR13-9:4	B10-1:0IR14-9:4	B11-1:0IR15-9:4	B12-1:0IR16-9:4	B1929-1:0IR1933-9:4	B1930-1:0IR1934-9:4	B1931-1:0IR1935-9:4	B1932-1:0IR1936-9:4
R13-3:0IG13-9:6	R14-3:0IG14-9:6	R15-3:0IG15-9:6	R16-3:0IG16-9:6	R1933-3:0IG1933-9:6	R1934-3:0IG1934-9:6	R1935-3:0IG1935-9:6	R1936-3:0IG1936-9:6
G13-5:0IB13-9:8	G14-5:0IB14-9:8	G15-5:0IB15-9:8	G16-5:0IB16-9:8	G1933-5:0IB1933-9:8	G1934-5:0IB1934-9:8	G1935-5:0IB1935-9:8	G1936-5:0IB1936-9:8
B13-7:0	B14-7:0	B15-7:0	B16-7:0	B1933-7:0	B1934-7:0	B1935-7:0	B1936-7:0
.	.	.	.	.	.	.	.
.	.	.	.	.	.	.	.
.	.	.	.	.	.	.	.
.	.	.	.	.	.	.	.
.	.	.	.	.	.	.	.

6.4.2 Color versus Input Data

The following table is for color versus input data (8bit). The higher the gray level, the brighter the color.

color	Gray Level	Color Input Data																								Remark
		RED data (MSB:R7, LSB:R0)								GREEN data (MSB:G7, LSB:G0)								BLUE data (MSB:B7, LSB:B0)								
		R7	R6	R5	R4	R3	R2	R1	R0	G7	G6	G5	G4	G3	G2	G1	G0	B7	B6	B5	B4	B3	B2	B1	B0	
Black	-	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
White	-	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1		
Gray 127	-	0	1	1	1	1	1	1	1	0	1	1	1	1	1	1	1	0	1	1	1	1	1	1		
Red	L0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	Black	
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
	L255	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
Green	L0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	Black	
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
	L255	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0		
Blue	L0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	Black	
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
	L255	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1		




Product Specification

G270ZAN01.2

AU OPTRONICS CORPORATION

6.4.3 Input Timing Diagram

(Lane0~7 eDP data:1, 2, 3, 4, 1921, 1922, 1923, 1924)

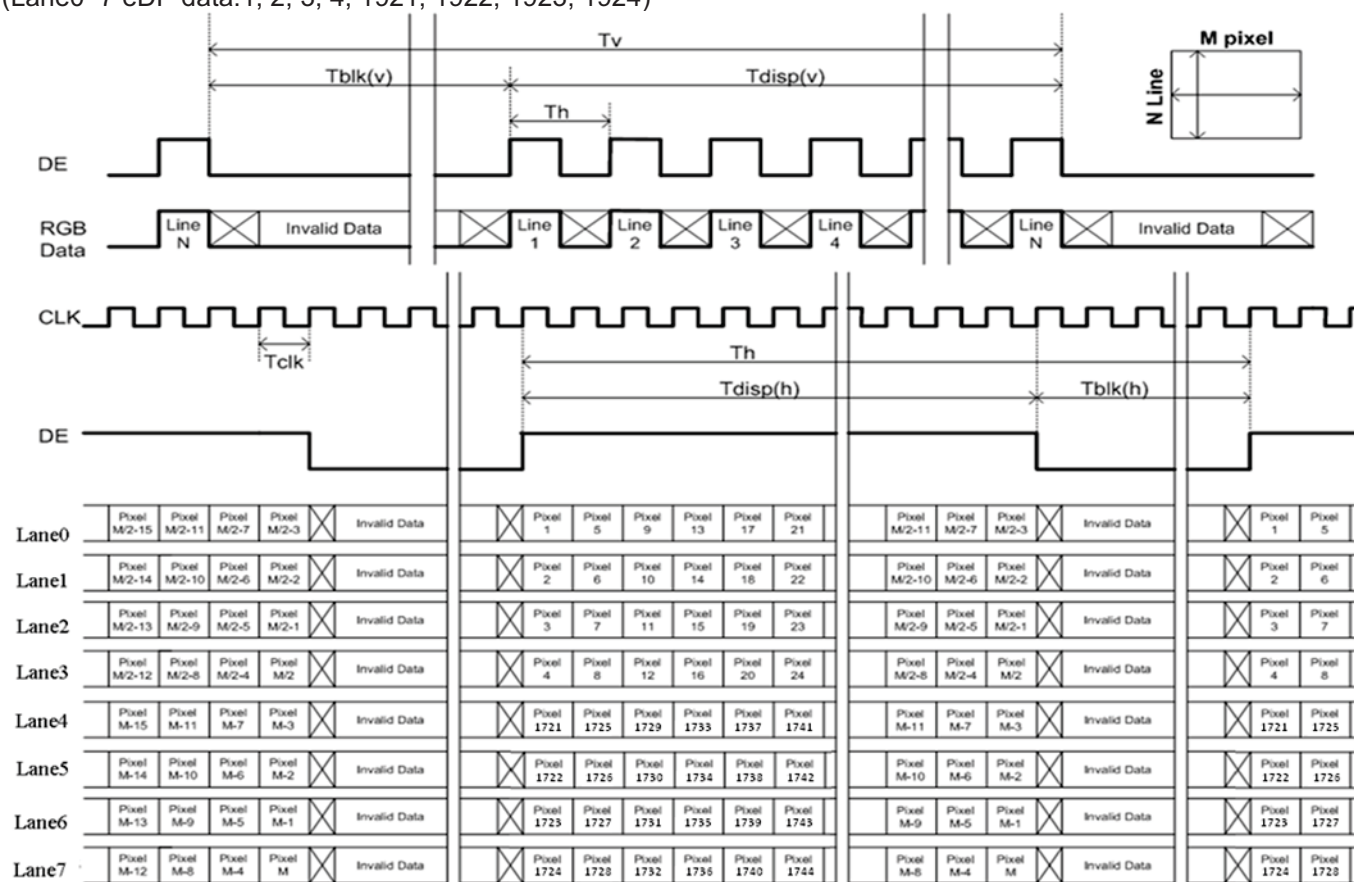



Product Specification

G270ZAN01.2

AU OPTRONICS CORPORATION

6.5 Interface Timing

6.5.1 Timing Characteristics

The input timing is shown as the following table.

Symbol	Description		Min.	Typ.	Max.	Unit	Remark
Tv	Vertical Section	Period	2180	2200	5450	Th	
Tdisp (v)		Active	2160	2160	2160	Th	
Tblk (v)		Blanking	20	40	3290	Th	
Fv		Frequency	57	120	144	Hz	Note 6-6
Th	Horizontal Section	Period	2000	2100	3520	Tclk	
Tdisp (h)		Active	1920	1920	1920	Tclk	
Tblk (h)		Blanking	80	180	1600	Tclk	
Fh		Frequency	180	264	314	kHz	Note 6-4
Tclk	Pixel Clock	Period	1.592	1.804	2.778	ns	1/Fclk
Fclk		Frequency	360	554	628	MHz	Note 6-5
Link Rate per Lane			5.4			Gbps	

Note 6-4: The equation is listed as following. Please don't exceed the above recommended value.

$$\begin{aligned}Fh (\text{Min.}) &= Fclk (\text{Min.}) / Th (\text{Min.}) \\Fh (\text{Typ.}) &= Fclk (\text{Typ.}) / Th (\text{Typ.}) \\Fh (\text{Max.}) &= Fclk (\text{Max.}) / Th (\text{Min.})\end{aligned}$$

Note 6-5: The equation is listed as following. Please don't exceed the above recommended value.

1st Lane N & 2nd Lane N skew < 200ns

$$\begin{aligned}Fclk (\text{Typ.}) &= Fv (\text{Typ.}) \times Th (\text{Typ.}) \times Tv (\text{Typ.}) \\Fclk (\text{Min.}) &\leq Fv \times Th \times Tv \leq Fclk (\text{Max.})\end{aligned}$$

Note 6-6: The equation is listed as following. Please don't exceed the above recommended value.

$$Fv = Fclk(\text{Typ.}) / (Tv \times Th)$$




Product Specification

G270ZAN01.2

AU OPTRONICS CORPORATION

6.5.2 Input Timing Diagram

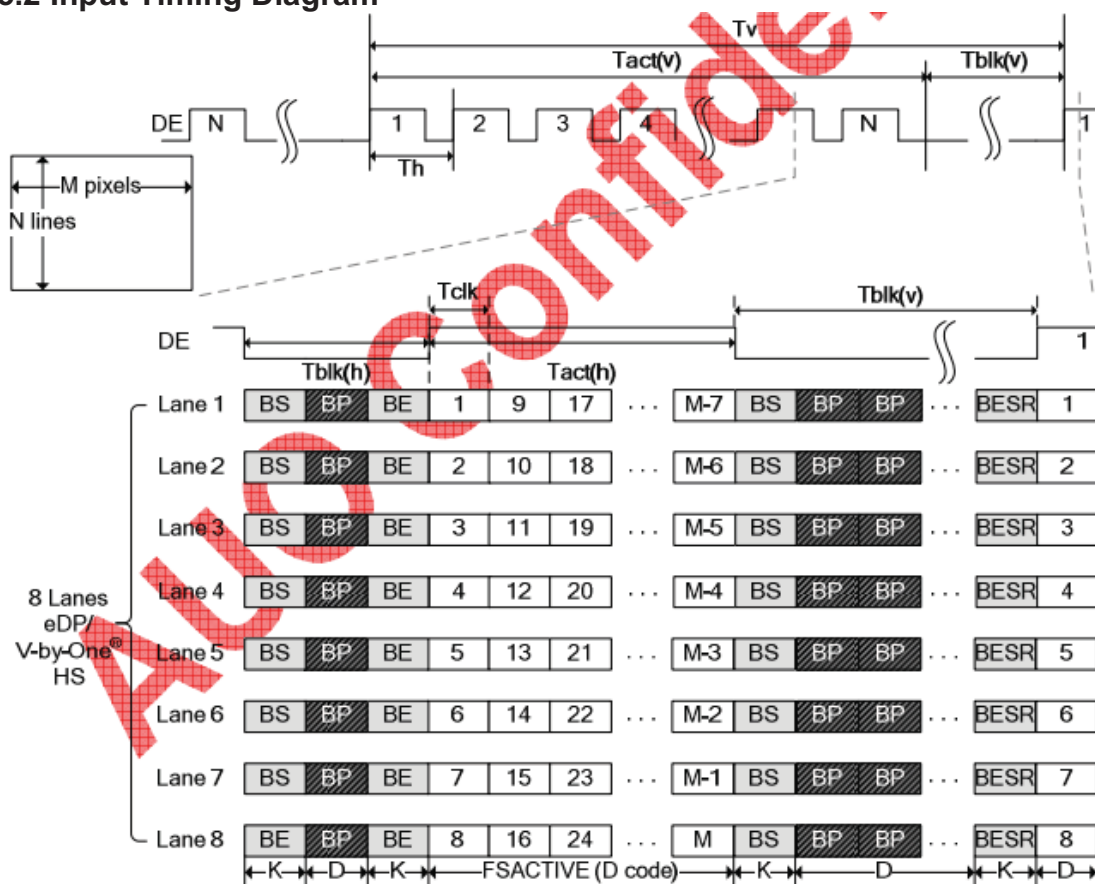




Product Specification

G270ZAN01.2

AU OPTRONICS CORPORATION

6.6 Power ON/OFF Sequence

VDD power and lamp on/off sequence is as below. Interface signals are also shown in the chart. Signals from any system shall be Hi-Z state or low level when VDD is off.

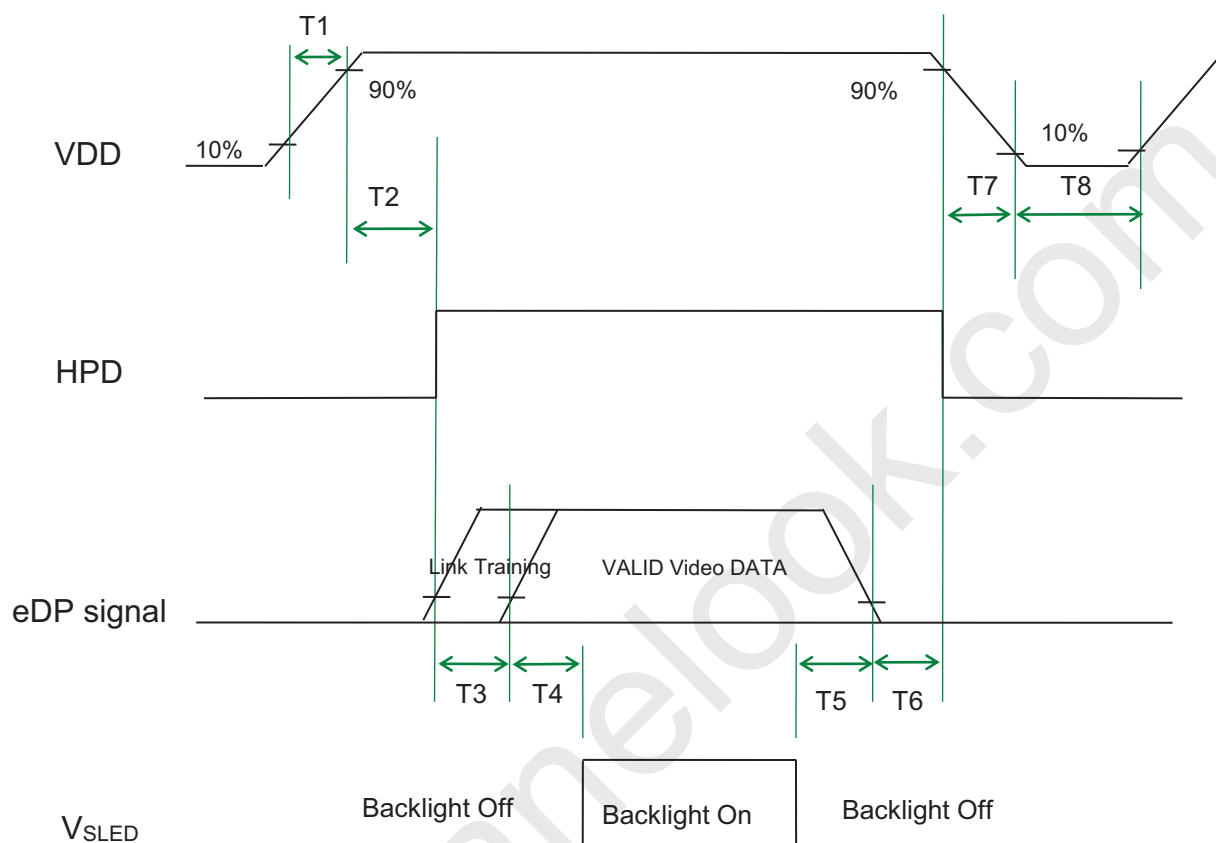

Power ON/OFF sequence timing

Symbol	Value			Unit	Remark
	Min.	Typ.	Max.		
T1	0.5	-	10	[ms]	
T2	0	-	200	[ms]	
T3	0	-	-	[ms]	
T4	500	-	-	[ms]	
T5	100	-	-	[ms]	
T6	0	-	50	[ms]	
T7	0	-	200	[ms]	
T8	1000	-	-	[ms]	

The above on/off sequence should be applied to avoid abnormal function in the display. Please make sure to turn off the power when you plug the cable into the input connector or pull the cable out of the connector.



Product Specification

G270ZAN01.2

AU OPTRONICS CORPORATION

7. Reliability Test Criteria

Items	Required Condition	Note
Temperature Humidity Bias (THB)	Ta= 50℃ , 80%RH, 300hours	
High Temperature Operation (HTO)	Ta= 50℃ , 300hours	
Low Temperature Operation (LTO)	Ta= 0℃ , 300hours	
High Temperature Storage (HTS)	Ta= 60℃ , 300hours	
Low Temperature Storage (LTS)	Ta= -20℃ , 300hours	
Vibration Test (Non-operation)	Acceleration: 1.5 G Wave: Random Frequency: 10 - 200Hz Sweep: 30 Minutes each Axis (X, Y, Z)	
Shock Test (Non-operation)	Acceleration: 50 G Wave: Half-sine Active Time: 20 ms Direction: ±X, ±Y, ±Z (one time for each Axis)	
Drop Test	Height: 45.7 cm, package test	
Thermal Shock Test (TST)	-20℃ /30min, 60℃ /30min, 100 cycles	1
On/Off Test	On/10sec, Off/10sec, 30,000 cycles	
ESD (Electrostatic Discharge)	Contact Discharge: ± 8KV, 150pF(330Ω) 1sec, 8 points, 25 times/ point.	2
	Air Discharge: ± 15KV, 150pF(330Ω) 1sec 8 points, 25 times/ point.	
Altitude Test	Operation:10,000 ft	
	Non-Operation:30,000 ft	

Note 1: The TFT-LCD module will not sustain damage after being subjected to 100 cycles of rapid temperature change.

- A cycle of rapid temperature change consists of varying the temperature from -20oC to 60oC, and back again. Power is not applied during the test.
- After finish temperature cycling, the unit is placed in normal room ambient for at least 4 hours before power on.

Note 2: According to EN61000-4-2 , ESD class B: Some performance degradation allowed. No data lost.
Self-recoverable. No hardware failures.

Note 3:

- Water condensation is not allowed for each test items.
- Each test is done by new TFT-LCD module. Don't use the same TFT-LCD module repeatedly for reliability test.
- The reliability test is performed only to examine the TFT-LCD module capability.
- To inspect TFT-LCD module after reliability test, please store it at room temperature and room humidity for 24 hours at least in advance.

G270ZAN01.2

25/29




Product Specification

AU OPTRONICS CORPORATION

G270ZAN01.2

8. Mechanical Characteristics

8.1 LCM Outline Dimension

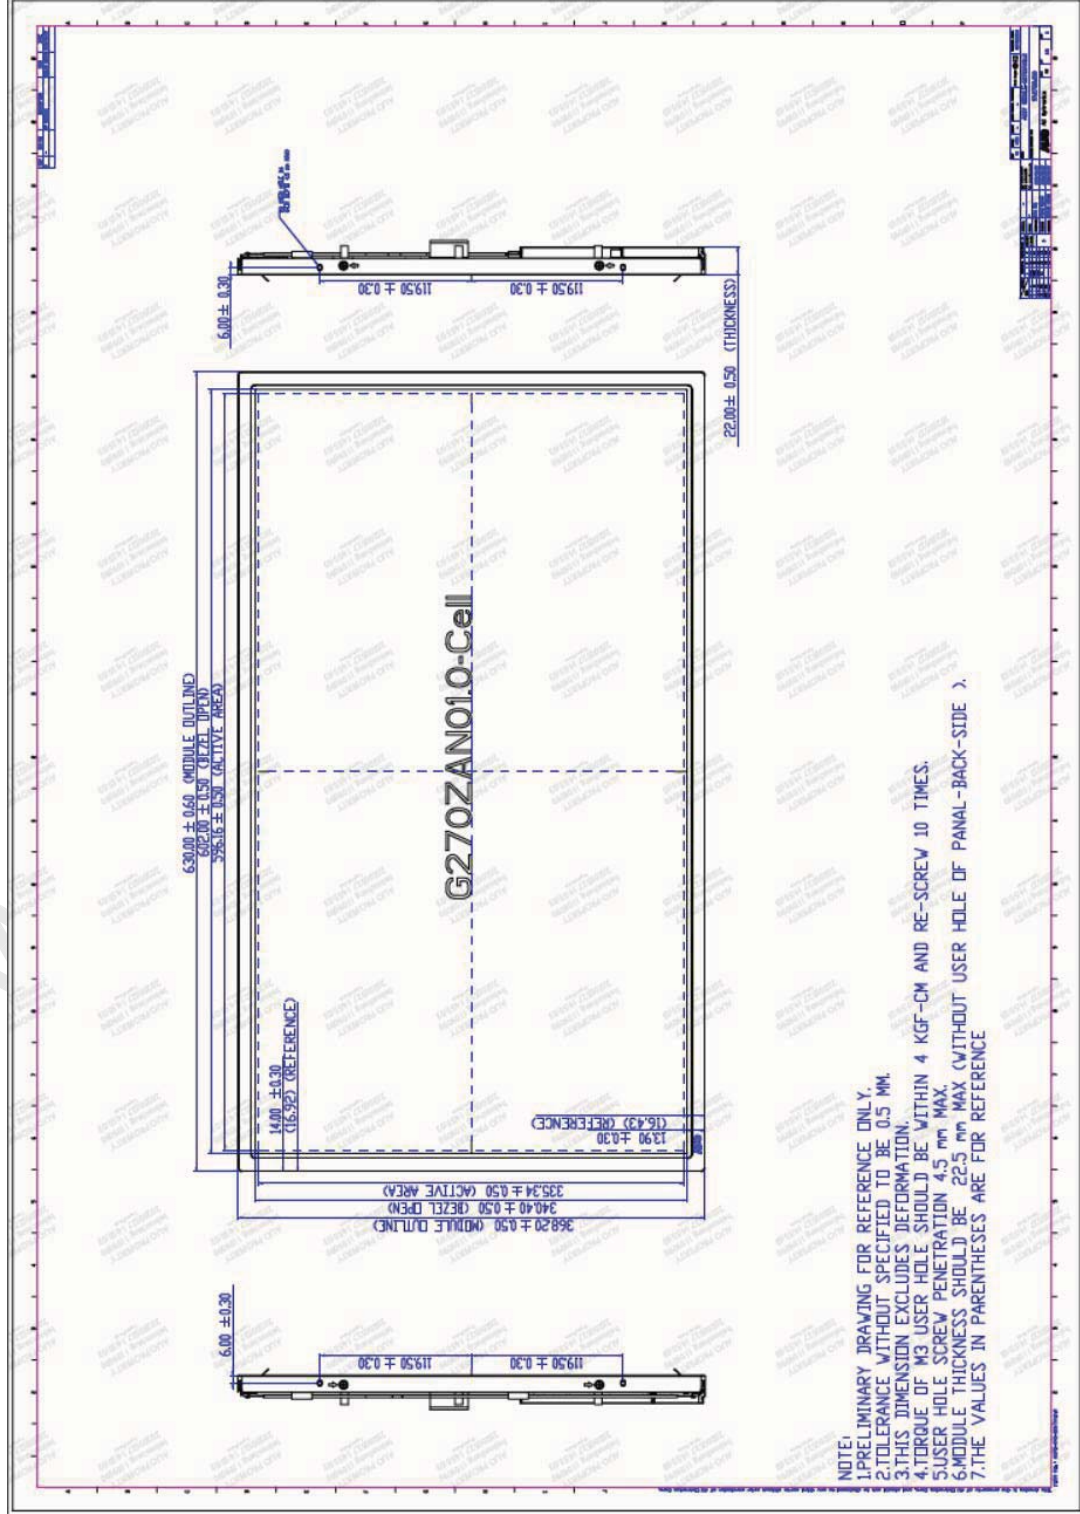




Product Specification

G270ZAN01.2

AU OPTRONICS CORPORATION

9. Label and Packaging

9.1 Shipping Label (on the rear side of TFT-LCD display)

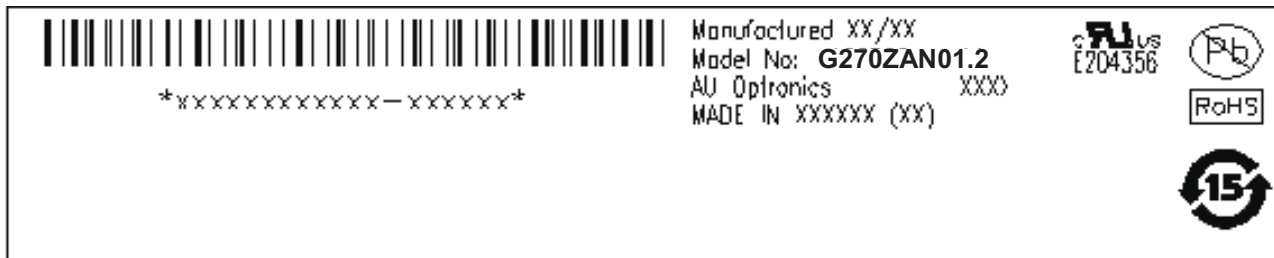


Note 1: For Pb Free products, AUO will add for identification.

Note 2: For RoHS compatible products, AUO will add for identification.

Note 3: For China RoHS compatible products, AUO will add for identification.

Note 4: The Green Mark will be presented only when the green documents have been ready by AUO Internal Green Team.

9.2 Carton Package

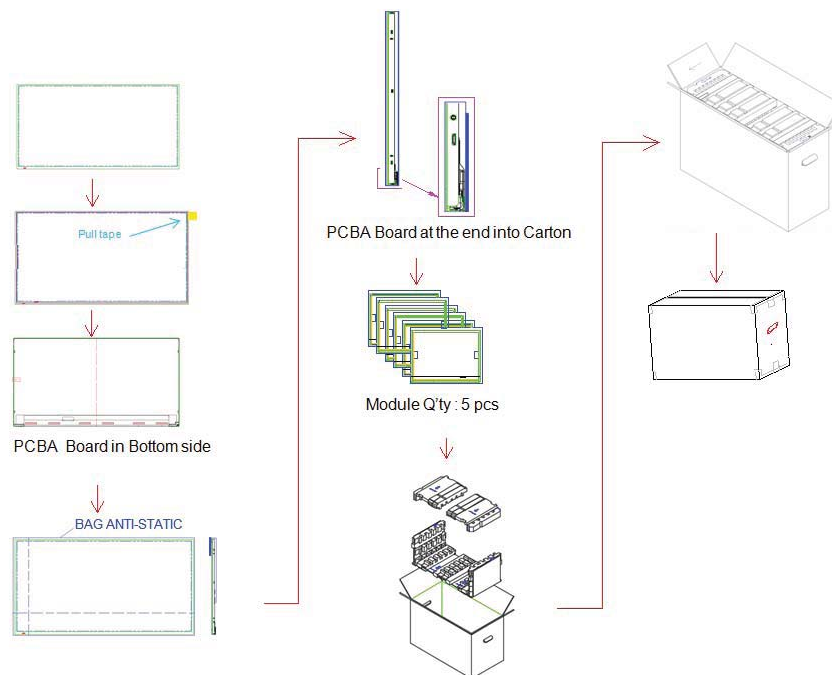

- Max capacity : 5pcs TFT-LCD module per carton
- Max weight : 20 kg per carton
- Outside dimension of carton : 718mm(L) * 375mm(W) * 468mm(H)
- Pallet size : 1200 mm * 800 mm * 144mm
- Box stacked :

Module by air_Max : (1 * 3) * 2 layers, one pallet put 6 boxes, total 30pcs module

Module by sea_Max : (1*3) * 2 layers + (1 * 3) * 2 layers, two pallet put 12 boxes, total 60pcs module

Module by sea_HQ_Max : (1*3) * 2 layers+(1*3) * 2 layers, two pallet put 12 boxes, total 60pcs module

G270ZAN01.2

28/29



Product Specification

G270ZAN01.2

AU OPTRONICS CORPORATION

10 Safety

10.1 Sharp Edge Requirements

There will be no sharp edges or comers on the display assembly that could cause injury.

10.2 Materials

10.2.1 Toxicity

There will be no carcinogenic materials used anywhere in the display module. If toxic materials are used, they will be reviewed and approved by the responsible AUO toxicologist.

10.2.2 Flammability

All components including electrical components that do not meet the flammability grade UL94-V1 in the module will complete the flammability rating exception approval process.

The printed circuit board will be made from material rated 94-V1 or better. The actual UL flammability rating will be printed on the printed circuit board.

10.3 Capacitors

If any polarized capacitors are used in the display assembly, provisions will be made to keep them from being inserted backwards.

10.4 National Test Lab Requirement

The display module will satisfy all requirements for compliance to:

UL 60950-1 second edition

U.S.A. Information Technology Equipment